Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

SUNDRY Do not use thi abandoned we	Lease Serial No. NMNM0555569 If Indian, Allottee or Tribe Name							
SUBMIT IN TRI	7. If Unit or CA/Agreement, Name and/or No. 8910115910							
Type of Well Oil Well Gas Well Oth	ner				8. Well Name and N EMPIRE S DEE			
Name of Operator COG OPERATING LLC	9. API Well No. 30-015-21279-00-S1							
3a. Address ONE CONCHO CENTER 600 MIDLAND, TX 79701	10. Field and Pool, or Exploratory EMPIRE							
4. Location of Well (Footage, Sec., T	., R., M., or Survey Description)	***************************************		11. County or Parisl	h, and State		
Sec 31 T17S R29E SWNE 19	EDDY COUNTY, NM							
12. CHECK APP	ROPRIATE BOX(ES) TO) INDICATE	NATURE OF	NOTICE, RI	EPORT, OR OTH	ER DATA		
TYPE OF SUBMISSION	TYPE OF SUBMISSION TYPE OF ACTION							
Notice of Intent	☐ Acidize ☐ De		epen		Production (Start/Resume)		☐ Water Shut-Off	
	☐ Alter Casing	□ Fract	ure Treat	Reclam	ation	■ Well Integrity		
☐ Subsequent Report	□ Casing Repair	■ New	Construction	☐ Recomp	olete	Other		
☐ Final Abandonment Notice	Change Plans	🛭 Plug	and Abandon	☐ Tempor	arily Abandon			
	☐ Convert to Injection ☐ Plug		g Back		Disposal			
Attach the Bond under which the wor following completion of the involved testing has been completed. Final Abdetermined that the site is ready for final Abdeter	operations. If the operation resignationment Notices shall be file in all inspection.) ##-10,440'. ##-10,440'. ##-10,440'. ### PERM. PKR. X TBG. (WOC X TAG CMT. PLUG. 10'-8,430'(T/WC); WOC X 50'-6,490'(CSG.LEAKS). #### WOC X TAG CMT. WOC X 50'-6,490'(CSG.LEAKS). ###################################	CUT @ 10,446 G. Add CA X TAG CMT. F OE,T/S.A.); W '-598'(T/YATE 264'(13-3/8"SI 5 SXS.CMT.	completion or recoquirements, including the complete of the co	AT. PLUG. DC X TAG. TAG. SEE A	AL GROUND LEVE	160-4 shall be fill, and the operation of the state of th	Hed once tor has A / 100 fro	
14. Thereby certify that the follogoing is	Electronic Submission #2	233472 verified PERATING LLO	by the BLM We C, sent to the C	II Information	System			
	nitted to AFMSS for proces	ssing by JENNI	FER MASON or	n 02/06/2014 (14JAM0135SE)	RECE	:IVED	
Name(Printed/Typed) DAVID A E	EYLER		Title AGENT	<u> </u>			5 200/	
Planta i Planta i P	D	2014		FEB &	FEB 2 5 2014			
Signature (Electronic S	THIS SPACE FO		Date 01/28/2		SE I	MOCD.	ARTEGIA	
	77 77	TEDENAL	. ON STATE	OI FICE U	JL			
Approved By James ((-lamoz		Title SE	EPS_		Date	2-17-1cf	
Conditions of approval, if any, are attached certify that the applicant holds legal or equ which would entitle the applicant to condu	itable title to those rights in the ct operations thereon.	subject lease	Office CF				·	
Fitle 18 U.S.C. Section 1001 and Title 43 States any false, fictitious or fraudulent s	U.S.C. Section 1212, make it a tatements or representations as	crime for any pers to any matter with	on knowingly and hin its jurisdiction.	l willfully to ma	ake to any department	or agency of the	United	

Additional data for EC transaction #233472 that would not fit on the form

32. Additional remarks, continued

DURING THIS PROCEDURE WE WILL USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK X HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

WELL: EMPIRE SDU 5 (3 RIVERS) FIELD: SOUTH EMPIRE COUNTY / STATE: EDDY / NEW MEXICO LOCATION: 2,180.0 FEL 8 1,980.0 FNL OF THE SVY, SEC 31, AELEVATION: 3,640.00 GR: 3,658.00 RKB

ð Chesapeake PN: 890429 API: 3001521279 SPUD DATE: 8/22/1974 RIG RELEASE: 8/22/1974 FIRST SALES: 1/1/1975

Maria La Nell Config. ∴ Origi				(KB)		in the	Wells	0(8		£ 7970	4-146-4
The second secon			7	Description .	2,925.0.) ID (in)		inal Hole	(i) [Grade	Top (tixB)	I. Bim /hk
<u> </u>		م المند المراجعية ومسيح	Casing J	oints	8.5				00 J-55:	18.0	
The state in the control of the state of the				00,	8,5			2		,2,924.0	
					nan Caslas		A tomber				18 30
13 3/8" 48# H-40 ST&C Surf Ceig					ace Casing mediate C		ent		op (ftKB): op (ftKB):		
13 3/8in; 48.00lbs/ft, H-40; 395 ftKB Cmt w/ 400 skt Circ					duction Cas				op (ftKB):		
101111111111111111111111111111111111111			Tubing	String: Tu	ıbing - Pro						
			Set Depth (10,46		Wells	Ore			Propose	d Run?
200 24H 0 22H V 68 8 1 EE CT8C 1mlm			□ (bem v	1 3	 	12 137	70 TO 10		Jenny .	16.8 18.4	9. 9
3 5/8" 24# & 32# K-55 & J-55 ST&C Inter Csp			Tubing	OD (m)	ID (in)	Can and	(Medi) ivi	M.Gradet	Top Thread	Top (NKB)	Bim (flux)
8 5/8in, 32.00lbs/h; J-55 K-55, 2.925 ftKB	K		Tubing	2 3/8		1:901	4:70 4:70		EUE	18.0 10,439.4	
CHILWI 1250 B.L. CHE	(8		Sub.		,,,,,,,,			_ 00	1.02	10,300.	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
	18		On Off	2 3/8	1.875	1.875			EUE	10,445.4	10,447
Perl, 3,260, 6/20/1960	- K		Profile	l		- [1	1	
	· K		Packer	2:3/8	1.875	1.875			EUE	10,447.0	10 454
Cap leak: Sozd.	8		Tubing	2 3/8		1.995	4.70	N-80	EUE	10,454.0	
Tubing, 2 3/8in, 1,995in, 18 ft/c8,-			Sub						1,27	131 15,115	1,44,44,
Csg lonk	8		Profile	2 3/8	1.810	1.810		N-80	EUE	10,464.0	10,465
	18		Nipple	2 2/46	1 005	4.005		K co:	PURK	140/405 0	40.400
			Tubing Sub	3 3/16	1.995	1.995	· ·	N-80	EUE	10,465.0	10,469
			Wireline	3/3/16	2:500			N-80	EUE	10,469.0	10,469
			Gûlde:			<u> </u>		<u> </u>	. sd.milast.man	arteren se	STATE THE
[DV Tool]	!		Perforat	ons.	2 . 73 2 683		the state in a	10	3		P : 0 - 19
			(A)	9.34 17 10.34	9	, W.	, ro 12,00		200	Sho Dan	s' Phas
Parl, 10,220, 8/15/2007		M A-	6/20/198		Zor	0, 0, 0	70	9 (RKB) 3:260.0	Bim (f.K	B): (amou 60.0	
		図り	8/15/200			·····		10,220.0			2.0
			6/1/1984					10.5.10.0		08.0	
Tubing Sub, 2 3/8in, 1,995in, 10,439 tiK9			1,1/14/19	**				10,798.0	10,8	03.0	.0 ,
On-Off Tool w/ Profile, 2 3/8in, 1/875in					X 17 V2 1		2012	1	بالمحسير مستجراتهم وبهدر	- A	
10,445 RKB	B		Stim Dat	· · · · · · · · · · · · · · · · · · ·	nto Trans	Zono	City Const		(Ke)	Bottom (los (A)
			Acidizing	The said	.;8/29/200		e e compresa de la c		10,510,0,	10	708,0
Packer, 2 3/8in, 1.875in, 10,447 ftkB -			Stim Det	alla 4	F. 1 3. 18.		A42)				19.1
			Sind Fra	c	12/18/198	Zone 4		Top (10,510.0	Bottom (708.0
Tuping Sub. 2 3/8in. 1,995in, 10,454 ftKB -	- E		1./2", D. Ad	dalvo ii, to coli	FINT CEN		F72.5 8	nd Size		Amount "	a, Pun
Profile Nipple, 2 3/8in, 1.810in, 10,464			Bulk San		16/544		ļ			80,0	00,0 lb
fixe the state of	E			alls)		10.0	Sec.	0-149 50	L NONT		30.0 Jib.
	6		Typa.	(0)	ato	Zono	- I delie	Top (f	IKB)	Doltom (U(B)
Winter O Hay 0 04461; 0 0001; 40 400			Acidizing	ails .	6/1/1984		er a s	100	10,510.0	310	708.0
/ireline Gulde, 3 3/16ln. 2,500in. 10,469 ftkB	[6]		Type	ans D	ato	Zona	- 10 1 m M 30 P	Top (f	iKB)	Bottom (tKB)
MORROW			Acidizing		7/8/1982				10,796.0		803.0
Perf, 10,510-10,708, 6/1/1984				•							
Acidizing, 10,510-10,708, 6/1/1984 Sand Frac, 10,510-10,708, 12/18/1984	orte	270									
Acidizing, 10,510-10,708, 8/29/2007			1								
	944										
PBTD, 10,760 fixB Cast Iron Bridge Plug, 4-1/2in; 10,760											
fl/G											
			ì								
Perf. 10,798-10,803, 11/14/1974 Acidizing, 10,796-10,803, 7/8/1982											
radicing, rati postalodo, vidribos	413										
		Carried Market									
	10.7		İ								
Cmi w/ 980 sx			1								
5 1/2: 15.5#, 17# & 20# N-80; K-55, & 4-55 LT&C and ST&C Prod Cag			1								
5 1/2: 15.5#, 17# & 20# N-80; K-55, & -55 LT&C and ST&C Prod Cap 5 1/2in, 20.00lbs/h, N-80.08K55, 10.980			- 1								
5 1/2: 15.5#, 17# & 20# N-80; K-55, & 4-55 LT&C and ST&C Prod Cag											
5 1/2: 15.5#, 17# & 20# N-80; K-55, & -55 LT&C and STRC Prod Can 5 1/2in, 20.00lbs/h, N-80,3&K55, 10,980											
5 1/2: 15.5#, 17# & 20# N-80; K-55; & 											
[5 1/2: 15.5#, 17# & 20# N-80 f. K-55, & 155 LTSC and STRC Prod Chall 5 1/2in, 20,001bs/fi, N-80,38K55, 10,980 nk8 [Depth (MD); 10,968 fik8]					- 1			······································			
[5 1/2: 15.5s; 17# 8 20# N-80; K-55, 8; 1-55 LT8C and STRC Prod Cks; 5 1/2in, 20.00lbs/h, N-80, J8K55, 10,960 nk8 [Depth (MD): 10,968 ftk8]			Z 2 12 1 14 1 4 1 4 1 4 1 4 1 4 1 4 1 4 1	S COASC	w .03 % 4 °/	27 V 18 1 14 14	. g signt so	Carrier Securi	540 <u>, 245</u> ,280	osalna wie	
[5 1/2: 15.5s, 17# & 20# N-80; K-55, & 155; LT8C and STRC Prod Cea 5 1/2in, 20.00lbs/h, N-80,38K55, 10,980 ncg [Depth (MD); 10,988 ftK8] Depth (MD); 10,988 ftK8] Dil History 14/1974 PERE @ 10798-803 w/ 4 14/1974 PE	pf. v/ 700 sx from	n 6470'-7138'	Hole in csa @								eto zace
5 1/2: 15.5s; 17th & 20th N-80; K-55, & 155 LTSC and STRC Prod Cks 5 1/2in, 20,000bs/h; N-80,J8K55; 10,960 nt/8 Depth (MD): 10,968 ft/8 Depth (MD): 10,968 ft/8 Brant - 52 C -	pf, v/ 700 sx from acid & 2400	n 6470'-7138'. 0.scf of nitroge	Hole in csg @	3860', P	ERF @ 326	0' w/ 2 sho	ols. SQZ	w/ 700 s			0. 1.20c V
[5 1/2: 15.5s, 17# & 20# N-80; K-55, & 155; LT8C and STRC Prod Cea 5 1/2in, 20.00lbs/h, N-80,38K55, 10,980 ncg [Depth (MD); 10,988 ftK8] Depth (MD); 10,988 ftK8] Dil History 14/1974 PERE @ 10798-803 w/ 4 14/1974 PE	pf, v/ 700 sx fror acid & 2400 0510'-16': 59	n 6470'-7138 0 scl of nitroge 02'-600'-666'-8	Hole in csg (c en. 2', 687'-708'.	3860', P	ERF @ 326	0' w/ 2 sho	ols. SQZ	w/ 700 s			1.1.2% V

off. 8/29/2007 ACDZ 10510'-10708' W/ 1500 gal 7.5% HCL, 118,000 scf N2.

COG Operating LLC

Lease & Well #


Empire South Deep Unit #5

API #30-015-21279

SPUD - 08/22/74

Eddy Co., NM Sec 31 17S 29E 1980 FNL & 2180 FEL

Elevation - 3:640'

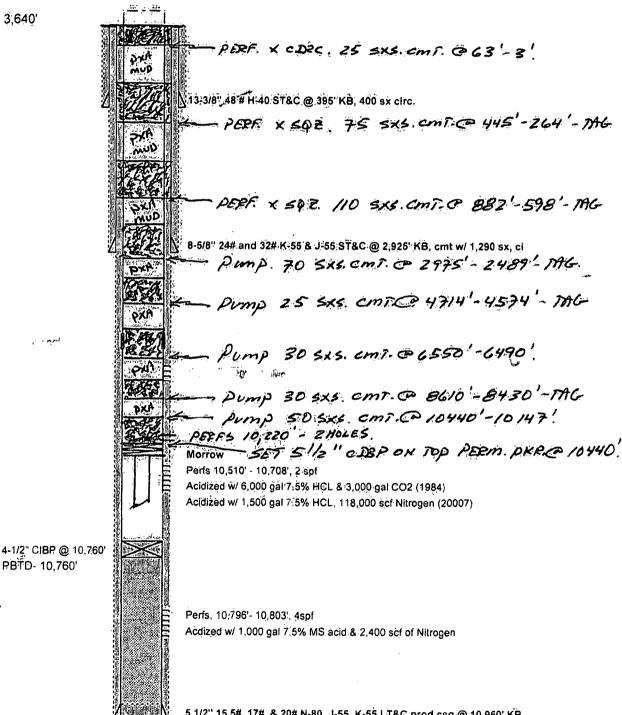

PBTD- 10.760'

5 1/2" 15.5#, 17#, & 20# N-80, J-55, K-55 LT&C prod csg @ 10,960' KB

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification</u>: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

- 7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date well was plugged.
- 8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

J. Amos 3/6/11



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Inspection & Enforcement

Jim Amos Supervisory Environmental Protection Specialist 575-234-5909, 575-361-2648 (Cell)

Mike Burton Environmental Protection Specialist 575-234-2226

Jeffery Robertson Natural Resource Specialist 575-234-2230

Jennifer Van Curen Environmental Protection Specialist 575-234-5905

Doug Hoag Civil Engineering Technician 575-234-5979

Linda Denniston
Environmental Protection Specialist
575-234-5974

Solomon Hughes Natural Resource Specialist 575-234-5951

Permitting

Cody Layton Natural Resource Specialist 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Todd Suter Surface Protection Specialist 575-234-5987

Tanner Nygren Natural Resource Specialist 575-234-5975

Amanda Lynch Natural Resource Specialist 575-234-5922

Legion Brumley Environmental Protection Specialist 575-234-5957

Realty, Compliance

Randy Pair Environmental Protection Specialist 575-234-6240