NM OIL CONSERVATION OCD AVAESISTRICT

Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

JUL 0 6 2015

FORM APPROVED OMB No. 1004-0137 Expires: July 31, 2010

5. Lease Serial No.

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an					NMNM95630		
					6. If Indian, Allottee or Tribe Name		
Do not use this h	use Form 3160-3 (A						
SUBMIT IN TRIPLICATE – Other instructions on page 2.					7. If Unit of CA/Agreement, Name and/or No.		
1. Type of Well		•			NMNM101669		
Oil Well	ell Other				8. Well Name and No. CROW FLATS 11 FEDERAL COM 1		
2. Name of Operator CHEVRON USA INC. CONTACT: mon			mccarver@cjes	s.com	9. API Well No. 30-015-30592		
3a. Address 15 SMITH RD.		3b. Phone No.	(include area co	de)	10. Field and Pool or E	•	
MIDLAND, TX. 79705		713-325-6288	3		DIAMOND MOUND, MORROW		
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 11 T16S R28E NMP 1980 FSL 660 FWL.				11. Country or Parish, State EDDY COUNTY, NM			
. 12. CHÉC	K THE APPROPRIATE BO	X(ES) TO IND	ICATE NATURI	E OF NOTIC	CE, REPORT OR OTHE	ER DATA	
TYPE OF SUBMISSION			TY	PE OF ACT	ION		
Notice of Intent	Acidize Alter Casing Casing Repair	=	en ure Treat Construction	Recla	uction (Start/Resume) amation mplete	Water Shut-Off Well Integrity Other	
Subsequent Report	Change Plans		and Abandon	=	oorarily Abandon		
Final Abandonment Notice	Convert to Injection	Plug I		·	r Disposal		
13 3/8" 48# @ 350' TOC SURF, 8 5. PERFS 9,372'-9,505' ESTIMATE SPERFS 9,372'-9,505' ESTIMATE SPERFS 9,372'-9,505' ESTIMATE SPERFS 9,372'-9,505' ESTIMATE SPERFS SQZ 60 SX CL "H" CMT 3) PERF & SQZ 60 SX CL "H" CMT 4) PERF & SQZ 60 SX CL "H" CMT 5) PERF & SQZ 60 SX CL "C" CMT 6) PERF & SQZ 60 SX CL "C" CMT 7) PERF & SQZ 120 SX CL "C" CMT 8) PERF & SQZ DEEP PENETRAT 9) PERF & SQZ DEEP PENETRAT	START DATE 07 / 06 / 15 48 HOURS BEFORE MC SX CL. "H" CEMENT ON . FROM 8,580'-8,380' (ST . FROM 6,770'-6,570' (W . FROM 4,580'-4,380' (TL . FROM 3,300'-3,100' (GI T. FROM 2,050'-1,750' (SI ING 60 SX CL "C" CMT. F	TOP, CIR W/ M TRAWN) "WC OLFCAMP)"V OLFCAMP)"V SHOE & T JBB)"WOC & LORIETA)"WO SHOE / SAN AI FROM 1,180'-9	MUD LADEN FLOC & TAG". NOC & TAG". TAG" TAG" OC & TAG" NOC & TAG" NDRES) "WOO	LUID THRU ALL Pla - 53	TUBING.	7/23/15 pried for record NMOCD	
10) CUT OFF WELLHEAD 3' BGL, I BOND COVERAGE: CA 0329	INSTALL REQUIRED DR	Y HOLE MARK	(ER, TURN OV	ER TO REC	SEE ATT	ACHED FOR	
14. I hereby certify that the foregoing is to	rue and correct. Name (Printe	d/Typed) ·			CONDIT	IONS OF APPROVAL	
Monty L. McCarver	P		Title Agent fo	r Chevron I	JSA Inc.		
Signature			Date 6	[le][5		
	THIS SPACE	FOR FEDE	RAL OR ST	ATE OF	FICE USE		
Conditions of approval, if any, are attached that the applicant holds legal or equitable to entitle the applicant to conduct operations to	itle to those rights in the subje		ertify	SPE 7 SFO		Date 7-1-15	
Title 18U.S.C Section 1001 and Title 43 fictitious or fraudulent statements or repre				nd willfully t	o make to any departmen	t or agency of the United States any false,	

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment.

NOTICES

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and grantingapproval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

SUPPLEMENTAL DRILLING DATA NEARBURG PRODUCING COMPANY CROW FLATS 11 FEDERAL COM #1

1. SURFACE FORMATION:

Alluvium

2. ESTIMATED TOPS OF GEOLOGIC MARKERS: (Get from Geo. dept.)

Yates ·	370'	Wolfcamp	6,770'
Queen	1,130'	Strawn	8,580'
San Andres	1,870'	Morrow	9,160'
Glorieta	3,300'	Miss Barnett Sh	9,490'
Tubb	4,580'	TD	9,600'
Abo	5.340'		

3. ANTICIPATED POSSIBLE HYDROCARBON BEARING ZONES:

Могтоw

Gas

4. CASING AND CEMENTING PROGRAM:

	Setting Depth			
Casing Size	From To	Weight	<u>Grade</u>	<u>Joint</u>
13-3/8"	0 - 350'	48#	J-55	ST&C
8-5/8"	0 - 2,000'	3ん 23#	J-55	ST&C & BT&C
5-1/2"	0' - 5,000'	17#	N-80	LT&C
5-1/2"	5,000' - 9,600'	20#	N-80	LT&C

Equivalent or adequate grades and weights of casing may be substituted at time casing is run, depending on availability.

We plan to drill a 17-1/2" hole to equal 350'. 13-3/8" casing will be cemented with 400 sacks or volume to cement to surface.

12-1/4" hole will be drilled to 2,000' and 8-5/8" casing will be cemented with 1,200 sacks or volume necessary to bring cement back to surface.

7-7/8" hole will be drilled and 5-1/2' production casing will be cemented with approximately 1,000 sacks of Class "H" 50/50 POZ.

5. PRESSURE CONTROL EOUIPMENT:

The BOP stack will consist of a 3,000 psi working pressure, dual ram type preventer and annular.

A BOP sketch is attached.

Current Wellbore Schematic


WELL (PN): CROW FLATS 11 FED COM 1(CVX) (890399)
FIELD OFFICE: HOBBS
FIELD: Diamond Mound-Morrow
STATE / COUNTY: NEW MEXICO / EDDY
LOCATION: SEC 11-16S-28E, 1980 FSL & 660 FWL
ROUTE: HOB-NM-ROUTE 17- KEVIN GRAVES
ELEVATION: GL: 3,584.0 KB: 3,602.0 KB Height: 18.0
DEPTHS: TD: 9,722.0

API#: 3001530592 Serial #:

SPUD DATE: 3/29/1999 RIG RELEASE: 4/23/1999

1ST SALES GAS: 5/31/1999 1ST SALES OIL:

Current Status: PRODUCING

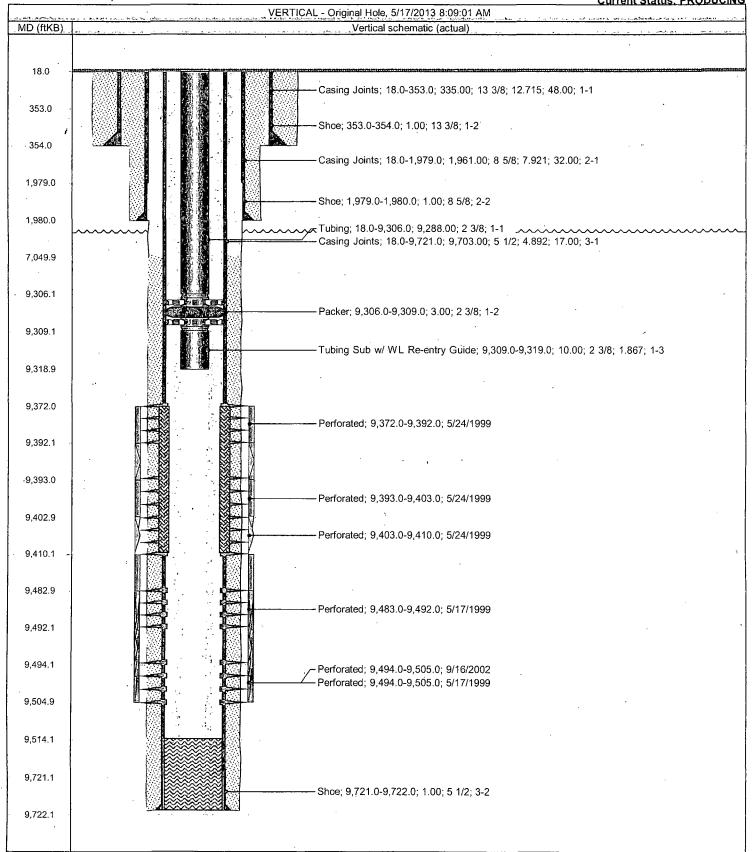

←A Wellbore Schematic

WELL (PN): CROW FLATS 11 FED COM 1(CVX) (890399) FIELD OFFICE: HOBBS

FIELD: Diamond Mound-Morrow

FIELD: Diamond Mound-Morrow
STATE / COUNTY: NEW MEXICO / EDDY
LOCATION: SEC 11-16S-28E, 1980 FSL & 660 FWL
ROUTE: HOB-NM-ROUTE 17- KEVIN GRAVES
ELEVATION: GL: 3,584.0 KB: 3,602.0 KB Height: 18.0
DEPTHS: TD: 9,722.0

API #: 3001530592 Serial #: SPUD DATE: 3/29/1999

RIG RELEASE: 4/23/1999 1ST SALES GAS: 5/31/1999

1ST SALES OIL:

Current Status: PRODUCING VERTICAL - Original Hole, 5/17/2013 8:09:01 AM MD (ftKB) Vertical schematic (actual) 18.0 Casing Joints; 18.0-353.0; 335.00; 13 3/8; 12.715; 48.00; 1-1 353.0 Shoe; 353.0-354.0; 1.00; 13 3/8; 1-2 -PERFYSQZ 1355X 500 SURFACE, VERIFY Casing Joints; 18.0-1,979.0; 1,961.00; 8 5/8; 7.921; 32.00; 2-1 354.0 PERF+SQZ (DSX 1, 180-950 TAG Shoe; 1,979.0-1,980.0; 1.00; 8 5/6; 2-2 1,979.0 Casing Joints; 18.0-9,721.0; 9,703.00; 5 1/2; 4.892; 17.00; 3-1 1.980.0 PERFYSOZ 605X 3,300; 3,100' TAG PERFYSOZ 605X 4,580-4,380 TAG PERFYSOZ 605X 5,340-5,140 TAG 7,049.9 9,306.1 PERF+SOZ 605X 6,770-6,570' TAG 9,309.1 ARF4502 605× 8,580-8,380' TAG 9,318.9 CIBP@9,300 W/355X 9,372:0 Perforated; 9,372.0-9,392.0; 5/24/1999 9.392.1 9,393.0 Perforated; 9,393.0-9,403.0; 5/24/1999 9.402.9 Perforated; 9,403.0-9,410.0; 5/24/1999 9.410.1 9,482.9 Perforated; 9,483.0-9,492.0; 5/17/1999 9.492.1 9.494.1 Perforated; 9,494.0-9,505.0; 9/16/2002 Perforated; 9,494.0-9,505.0; 5/17/1999 9.504.9 9,514.1 9,721.1 Shoe; 9,721.0-9,722.0; 1.00; 5 1/2; 3-2 9.722.1

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

- 7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

J. Amos 3/6/11



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office

Carlsbad, New Mexico 88220-6292

www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of
 Operations must include adequate measures for stabilization and reclamation of disturbed lands.
 Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD
 process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Linda Denniston
Environmental Protection Specialist
575-234-5974

Henryetta Price Environmental Protection Specialist 575-234-5951

Dara Glass Environmental Protection Specialist 575-234-5924

Shelly Tucker Environmental Protection Specialist 575-234-5979 Cody Layton Supervisory Multi Resources 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Jeffery Robertson Natural Resource Specialist 575-234-2230