



Apache Corporation
303 Veterans Airpark Lane, #3000
Midland, TX 79705

NFE Federal #035H *Api: 30-015-42587*
Eddy County, New Mexico *D-6-17S-31E 1010FSL 155 FEL*

155	1.55	0.50	0.88	1.36	1.36
405	2.50	1.80	3.15	7.88	9.23
596	1.91	1.80	3.15	6.02	15.25
913	3.17	1.40	2.45	7.77	23.01
1039	1.26	0.80	1.40	1.76	24.78
1355	3.16	0.20	0.35	1.11	25.88
1543	1.88	0.10	0.18	0.33	26.21
1732	1.89	0.40	0.70	1.32	27.54
1921	1.89	0.20	0.35	0.66	28.20
2111	1.90	0.10	0.18	0.33	28.53
2304	1.93	0.60	1.05	2.03	30.56
2494	1.90	0.40	0.70	1.33	31.89
2683	1.89	0.70	1.23	2.32	34.20
2903	2.20	0.10	0.18	0.39	34.59
3062	1.59	0.10	0.18	0.28	34.87
3252	1.90	0.40	0.70	1.33	36.20
3457	2.05	0.60	1.05	2.15	38.35
3749	2.92	0.40	0.70	2.04	40.39
3908	1.59	0.10	0.18	0.28	40.67
4098	1.90	0.10	0.18	0.33	41.00
4288	1.90	0.10	0.18	0.33	41.34
4477	1.89	0.60	1.05	1.98	43.32
4665	1.88	0.10	0.18	0.33	43.65
4872	2.07	0.80	1.40	2.90	46.55


Archie Brown - General Manager


The attached instrument was acknowledged before me on the 17th day of March, 2015 by
Archie Brown - General Manager, CapStar Drilling, Inc.


Notary Public

NM OIL CONSERVATION
ARTESIA DISTRICT

DEC 16 2015

RECEIVED

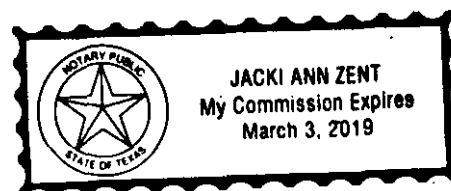

WELL NAME: NFE FEDERAL COM 35H
API: 30-015-42587
SPUD DATE: 2/17/2015
PRODUCING FORMATION: YESO UPR BLUNEARY
FIELD: CEDAR LAKE (BP)
COUNTY: EDDY
STATE: NEW MEXICO
WORKING INTEREST: 60.00%

SURFACE LOC: 1010 FSL & 155' FEL
SECTION: 6
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: JOHN WEST SURVEYING CO
BOTTOM HOLE LOC: 1030 FSL & 334' FEL
SECTION: 5
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: JOHN WEST SURVEYING CO
DRILL RIG: CAPSTAR 119
RIG RELEASE: 3/8/2015

KB (ft): 3,793.00
GL (ft): 3,752.00
KBGL DIFF (ft): 11.00
TMD (ft): 10,280.00
TD OF PILOT HOLE (ft): N/A
FC DEPTH (ft): 10,246.00
PBMD (ft): 10,280.00
RDV DEPTH (ft): N/A
ORIO VALVE (ft): N/A
DEEPEST TVD (ft): 5,505.00


TAPERED CASING STRING:

7" 29# L-80 TO X-OVER @ 4,854'
TAPERING TO 5.5" 20# L-80 SET @ 10,255'

KOP (ft):
LATERAL LENGTH (ft):
TD OF PILOT HOLE (ft): N/A

LAST UPDATED BY: HILLARI GOULD
LAST UPDATED: 10/13/2015

COMPLETION:
STIMULATION:
STATUS:
COMMENTS:

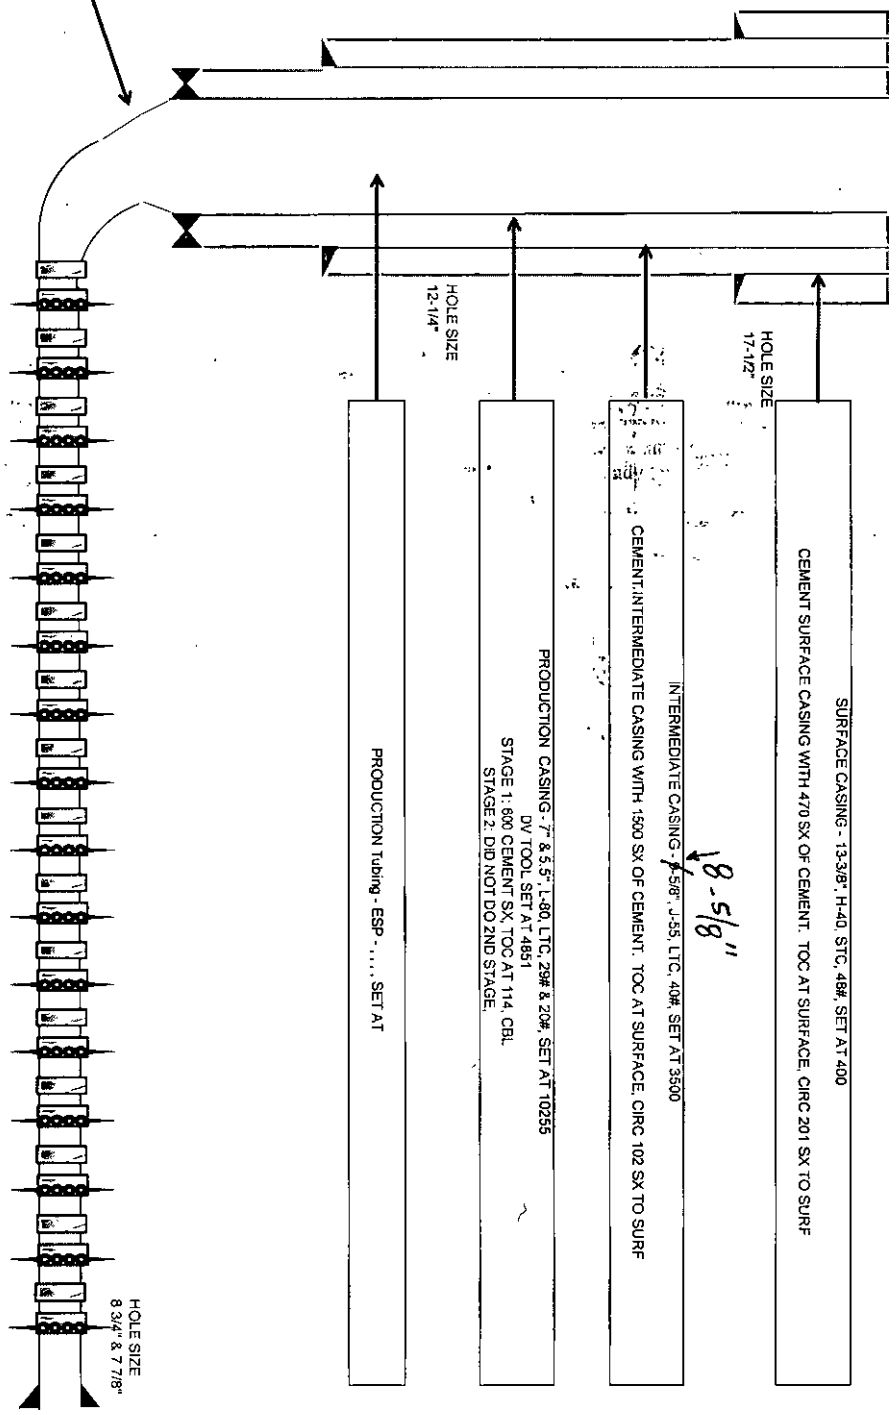

PACKERS & SLEEVES - 16 STAGES					
TOTAL ACID (gal)	2,801	TOTAL LTR (bbl)	70,987	TOTAL PROPANT (lbs)	3,043,470
PRODUCTION METHOD	Pumping	LIFT TYPE	ESP	SETTING DEPTH	0
CROSSOVER SUB @ 4,854'					
MAX WH RATE (bpm)					
39.00					
MAX WH PRESSURE (psi)					
6,120					