

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-21103
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA WTP Limited Partnership		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name Simpson A
4. Well Location Unit Letter <u>H</u> : <u>1980</u> feet from the <u>North</u> line and <u>810</u> feet from the <u>East</u> line Section <u>29</u> Township <u>21S</u> Range <u>27E</u> NMPM County <u>Eddy</u>		8. Well Number 2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3154'		9. OGRID Number 192463
		10. Pool name or Wildcat Burton Flat Morrow

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL. <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attached

Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms, www.cmnrd.state.nm.us/oed.

NM OIL CONSERVATION
ARTESIA DISTRICT
MAR 16 2016
RECEIVED

Spud Date:

Rig Release Date:

WELL MUST BE PLUGGED BY 3/16/2017

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 3/2/15

Type or print name David Stewart E-mail address: david.stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Robert J. Reed TITLE COMPLIANCE OFFICER DATE 3/16/2016

Conditions of Approval (if any):

575-626-0836

Simpson A #2 – 30-015-21108

TD-12165' PBD-11910' Perfs-11624-11809' Pkr-11950'

13-3/8" 48# csg @ 420' w/ 425sx, 17-1/2" hole, TOC-Surf-Circ
9-5/8" 32-36-40# csg @ 3100' w/ 1330sx, 12-1/4" hole, TOC-Surf-Circ
5-1/2" 17-20# csg @ 12165' w/ 800sx, 7-7/8" hole, TOC-9700'-CBL

1. RIH & set CIBP @ 11574', M&P 30sx cmt to 11340'
2. M&P 35sx cmt @ 10770-10495' WOC-Tag
3. Perf @ 8850', sqz 30sx cmt to 8750' WOC-Tag
4. Perf @ 7130', sqz 30sx cmt to 7030' WOC-Tag
5. Perf @ 6360', sqz 30sx cmt to 6260' WOC-Tag
6. Perf @ 5050', sqz 30sx cmt to 4950' WOC-Tag
7. Perf @ 3150', sqz 40sx cmt to 3050' WOC-Tag
8. Perf @ 2750', sqz 40sx cmt to 2650' WOC-Tag
9. Perf @ 1610', sqz 40sx cmt to 1510' WOC-Tag
10. Perf @ 470' sqz 185sx cmt to surface

10# MLF between plugs

Above ground steel tanks will be utilized

**OXY USA WTP LP - Proposed
Simpson A #2
API No. 30-015-21108**

185sx @ 470'-Surface

40sx @ 1610-1510' WOC-Tag

40sx @ 2750-2650' WOC-Tag

40sx @ 3150-3050' WOC-Tag

30sx @ 5050-4950' WOC-Tag

1/91-400sx @ 6275-5100'

6/77-100sx @ 6600-6300'


6/77-CIBP @ 7537' w/ 4sx to 7500'

Perfs @ 9007-9031'

DB Pkr/plg @ 9650' w/4sx cmt

**8-3/4" hole @ 11801'
5-1/2" csg @ 6552-10028'
w/ 550sx-TOC-6600'**

PB-10000'

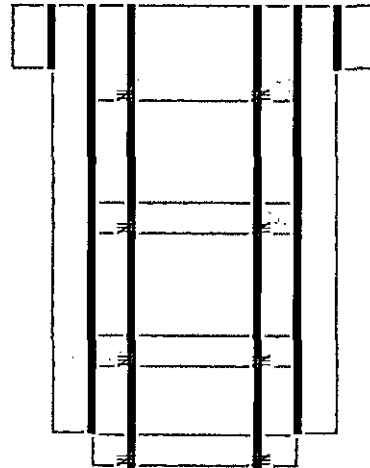


**17-1/2" hole @ 420'
13-3/8" csg @ 420'
w/ 425sx-TOC-Surf-Circ
Perf @ 470'**


Perf @ 1610'

Perf @ 2750'

**12-1/4" hole @ 3100'
9-5/8" csg @ 3100'
w/ 1330sx-TOC-Surf-Circ
Perf @ 3150'**



**Perf @ 5050'
KO @ 5100'**

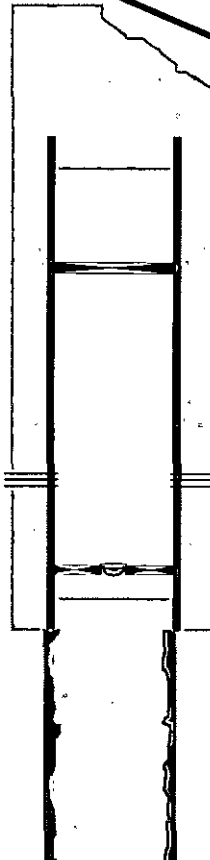

**30sx @ 6360-6260' WOC-Tag
Perf @ 6360'**

**30sx @ 7130-7030' WOC-Tag
Perf @ 7130'**

**30sx @ 8850-8750' WOC-Tag
Perf @ 8850'**

**7-7/8" hole @ 12165'
5-1/2" csg @ 12165'
w/ 800sx-TOC-9700'-CBL**

35sx @ 10770-10495' WOC-Tag

**CIBP @ 11574' w/ 30sx 11340'
Perfs @ 11624-11809'**

**DB Pkr/plg @ 11950' w/4sx cmt
Perfs @ 12073-12081'
PB-11910'**

TD-11801'

TD-12165'

OXY USA WTP LP - Current
Simpson A #2
API No. 30-015-21108

