Subtitit 3 Copies To Appropriate District Office District I	State of New Energy, Minerals and N		Form C-103 May 27, 2004	
1625 N. French Dr., Hobbs, NM 88240 <u>District 11</u>	OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505		WELL API NO. 30-015-33640	
1301 W. Grand Ave., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410			5. Indicate Type of Lease STATE 6. State Oil & Gas Lease	FEE
District IV 1220 S. St. Francis Dr., Santa Fe, NM			V-5643	NO.
SUNDRY NOT (DO NOT USE THIS FORM FOR PROPO DIFFERENT RESERVOIR. USE "APPLI	R PLUG BACK TO A	7. Lease Name or Unit As Sunshine State Com	greement Name	
PROPOSALS.) 1. Type of Well: Oil Well	Gas Well 🛛 Other	RECEIVED		
2. Name of Operator	ergy Corporation	MAR 3 0 2006	9. OGRID Number	3837
3. Address of Operator P. O. Box 960 Artesia, NM 88211-0960 P. O. Box 960 Artesia, NM 88211-0960 P. O. Box 960 Artesia, NM 88211-0960				
4. Well Location Unit Letter H	1980 feet from the 1	North line and	660 feet from the	East line
Section19	Township 198	Range 23E	NMPM Count	y <u>Eddy</u>
	I 1. Elevation (Show whether 4	DR, RKB, RT, GR, etc., 127' GR)	
Pit or Below-grade Tank Application or Closure				
Pit typeDepth Groundw				
Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material				
12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data				
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK ALTERING CASING PULL OR ALTER CASING MULTIPLE COMPL CASING/CEMENT JOB				
	. —	071155		
OTHER: 13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.				
 Notify OCD 24 hours prior to starting plugging operations. Set CIBP at 5721' w/ 35' cement cap. Circ hole with mud gel. Set 100' plug from 1660-1560', 50' below and above 9 5/8" shoe. — TA C Set 100' plug from 358-258', 50' below and above 13 3/8" shoe. — TA C Set 10 sx surface plug. (40') 				
7. Install dry hole marker.				
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines, a general permit or an (attached) alternative OCD-approved plan				
SIGNATURE Jeny L		EProduction Clerk	DATE	3/29/2006
Type or print name Jerry W. Sherr For State Use OnI	E-mail	address: jerrys@macke	nergycorp.com Telephon	e No. <u>(505)748-1288</u>
APPROVED BY: Conditions of Approval (if any):	TITL	E Fellowys	DATE	4/3/06


MACK ENERGY CORPORATION **SUNSHINE STATE #1** Sec 19 T19S R23E

1 M. W.

Notify OCD 24 hrs. prior to any work done.

STATE

- Set ČIBP @ 5721' w/35' cmt cap circ hole w/mud
- Set 100' cmt plug 1660-1560' 50' above and below 9 5/8" shoe
 - Set 100' cmt plug 358-258' 50' above and below 13 3/8" shoe
 - Set 10 sks 60' cmt plug
- Install Dry Hole marker 2 6 4 5 9

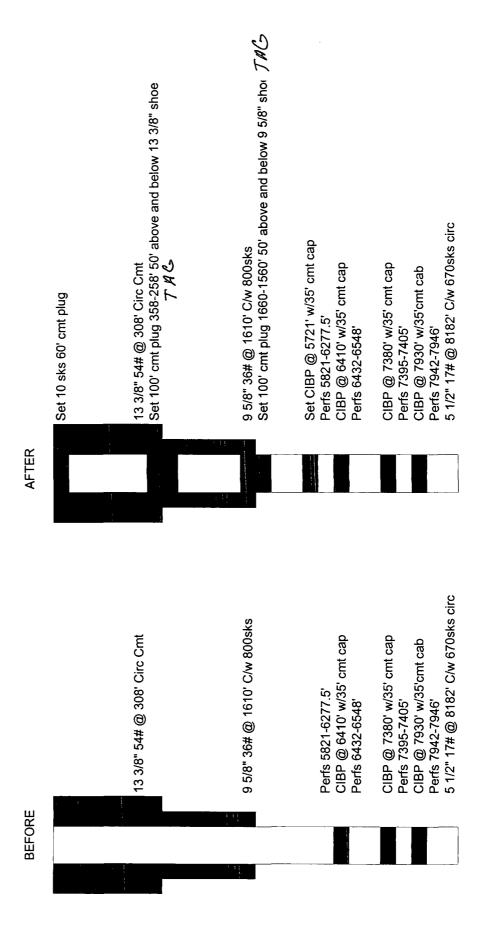

State #1.WK4 03/23/2006