

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTNMOCD
ArtesiaFORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NMNM0441951A
2. Name of Operator CIMAREX ENERGY COMPANY OF CO		6. If Indian, Allottee or Tribe Name
3a. Address 202 S CHEYENNE AVE SUITE 1000 TULSA, OK 74103.4346		7. If Unit or CA/Agreement, Name and/or No.
3b. Phone No. (include area code) Ph: 432-620-1936		8. Well Name and No. WHITE CITY 31 FEDERAL 4
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 31 T24S R26E SESE 800FSL 1250FEL		9. API Well No. 30-015-35494-00-S1
		10. Field and Pool or Exploratory Area WHITE CITY-PENN
		11. County or Parish, State EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input checked="" type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Cimarex Energy Co. respectfully requests approval to plugback to the cisco canyon and wolfcamp as indicated on the attached procedure.

Cimarex also requests approval to downhole commingle the Cisco and Wolfcamp pools. The 2016 White City Area Downhole Commingling Field Study included the referenced well for the commingling. Field Study approved 7/6/16.

NMOCD DHC 4803.

Attachments: C102, procedure, wellbore diagrams, oil, water & gas analysis, and DHC worksheet.

Sundry to remove strawn test as previously approved.

OIL CONSERVATION
ARTESIA DISTRICT
MAR 30 2017
RECEIVED

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct. Electronic Submission #368904 verified by the BLM Well Information System For CIMAREX ENERGY COMPANY OF CO, sent to the Carlsbad Committed to AFMSS for processing by JENNIFER SANCHEZ on 03/07/2017 (17JAS0390SE)	
Name (Printed/Typed) TERRI STATHEM	Title MANAGER REGULATORY COMPLIANCE
Signature (Electronic Submission)	Date 03/06/2017
THIS SPACE FOR FEDERAL OR STATE OFFICE USE	
Approved By _____	Title _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

4-27-17

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-35494	² Pool Code 87280	³ Pool Name White City; Penn (Gas)
⁴ Property Code 33815	⁴ Property Name White City 31 Federal	⁶ Well Number 4
⁷ OGRID No. 162683	⁸ Operator Name Cimarex Energy Co. of Colorado	⁹ Elevation 3409'

¹⁰ Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	31	24S	26E		800	South	1250	East	Eddy

¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 640	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

				<p>¹⁷ OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p>Signature: <i>[Signature]</i> Date: 12/28/2016</p> <p>Printed Name: Terri Stathem</p> <p>E-mail Address: tstathem@cimarex.com</p>
				<p>¹⁸ SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p>
				<p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p>
				<p>Certificate Number</p>

800' —
1250' —

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-5170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-35494	² Pool Code 97693	³ Pool Name Black River; Wolfcamp, Southwest (gas)
⁴ Property Code 33815	⁵ Property Name White City 31 Federal	
⁷ OGMID No. 162683	⁸ Operator Name Cimarex Energy Co. of Colorado	
		⁶ Well Number 4
		⁹ Elevation 3409'

" Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from line	North/South line	Feet from line	East/West line	County
P	31	24S	26E		800	South	1250	East	Eddy

" Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from line	North/South line	Feet from line	East/West line	County

¹³ Dedicated Acres 320	¹⁴ Joint or Infill	¹⁵ Consolidation Code	¹⁶ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

				<p>" OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or is a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p>Signature: <i>[Signature]</i> Date: 1-9-2017</p> <p>Printed Name: Terri Stathem</p> <p>E-mail Address: tstathem@cimarex.com</p>
				<p>"SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Date of Survey:</p> <p>Signature and Seal of Professional Surveyor:</p>
				<p>Certificate Number</p>

Downhole Commingling Worksheet

Operator: Cimarex Energy
 Lease/Well Name/API Number/Location: White City 31 Fed 4/30-015-35494/Sec. 31, T24S, R26E
 Date:

Data	Bottom Formation		Upper Formation		Estimated Combined Production Data
	White City Penn (Gas)	Blackriver; Wolcamp, Southwest (Gas)			
Pool name	87280	97693			
Pool Code	87280	97693			
State Form C-102 with dedicated Acres Provided	640 acres	320 acres			
Formation Name	Cisco Canyon	Wolcamp			
Top and Bottom of Pay Section (perforated or open-hole interval)	9,900' - 10,299'	8,343' - 9,900'			8,343' - 10,299'
Method of production	Flowing	Flowing			Flowing
Bottom Hole Pressure	Within 150% of top perf	Within 150% of top perf			Within 150% of top perf
Reservoir Drive mechanism	Gas Drive	Gas Drive			Gas Drive
	Oil: 53.5° API Gas: 1142.4	Oil: 51.8° API Gas: 1225.8			Oil: 52.2° API Gas: 1204.1
	BTU dry / 1122.6 BTU wet @ 14.73 psi	BTU dry / 1204.6 BTU wet @ 14.73 psi			BTU dry / 1183.3 BTU wet @ 14.7 psi
Oil gravity and/or BTU	0	0			0
Average Sulfur Content (Wt %)	Yes	Yes			
Oil sample Analysis provided	Yes	Yes			
Gas Analysis provided	Yes	Yes			
Produce Water Analysis provided	Yes	Yes			
H2S present	No	No			No
Producing, Shut-in or New Zone	New Zone	New Zone			
Date and Oil/Gas/Water rates of Last Production (new zones or no production history Operator shall attached production estimated and supporting data)	Date: N/A Expected Rate: 26 BOPD, 652 MCFPD, 165 BWPD	Date: N/A Expected Rate: 74 BOPD, 1,855 MCFD, 468 BWPD			Date: N/A Expected Rate: 100 BOPD, 2507 MCFD, 633 BWPD
Average decline % (provide back up data)	7% (terminal)	7% (terminal)			7% (terminal)
Fixed Allocation Percentage	Oil: 26% Gas: 26%	Oil: 74% Gas: 74%			Oil: 100% Gas: 100%

Remarks: Production history for analogs for both zones provided in field study appendix.

Operator Signature: *[Signature]*
 Date: 2/17/17

Attached Supporting documents
 State Form C-102 with dedicated Acres Provided
 Oil sample Analysis provided (Must be current)
 Gas Analysis provided (Must be current)
 Produce Water Analysis provided (Must be current)
 Any additional supporting data (i.e. offset well production and decline curves etc.)
 *Utilize weighted average.



LABORATORY SERVICES

Natural Gas Analysis

www.permianls.com

575.397.3713 2609 W Marland Hobbs NM 88240

For:	Cimarex Energy	Sample:	Sta. # 309588185
	Attention: Mark Cummings	Identification:	Wigeon 23 Fed Com 1
	600 N. Marienfeld, Suite 600	Company:	Cimarex Energy
	Midland, Texas 79701	Lease:	
		Plant:	

Sample Data:	Date Sampled	7/30/2013 12:25 PM	
	Analysis Date	7/31/2013	
	Pressure-PSIA	900	Sampled by: Taylor Ridings
	Sample Temp F	107	Analysis by: Vicki McDaniel
	Atmos Temp F	85	

H2S = 0.3 PPM

Component Analysis

		Mol Percent	GPM
Hydrogen Sulfide	H2S		
Nitrogen	N2	0.677	
Carbon Dioxide	CO2	0.123	
Methane	C1	82.764	
Ethane	C2	9.506	2.536
Propane	C3	3.772	1.037
I-Butane	IC4	0.640	0.209
N-Butane	NC4	1.185	0.373
I-Pentane	IC5	0.335	0.122
N-Pentane	NC5	0.374	0.135
Hexanes Plus	C6+	<u>0.624</u>	<u>0.270</u>
		100.000	4.681

REAL BTU/CU.FT.		Specific Gravity	
At 14.65 DRY	1219.2	Calculated	0.6973
At 14.65 WET	1197.9		
At 14.696 DRY	1223.0		
At 14.696 WET	1202.1	Molecular Weight	20.1966
At 14.73 DRY	1225.8		
At 14.73 Wet	1204.6		

North Permian Basin Region
P.O. Box 740
Sundown, TX 79372-0740
(806) 229-8121


Lab Team Leader - Sheila Hernandez
(432) 495-7240

OIL ANALYSIS

Company:	CIMAREX ENERGY	Sales RDT:	44212
Region:	PERMIAN BASIN	Account Manager:	WAYNE PETERSON (575) 910-9389
Area:	CARLSBAD, NM	Analysis ID #:	3208
Lease/Platform:	WIGEON '23' FEDERAL	Sample #:	437122
Entity (or well #):	1	Analyst:	SHEILA HERNANDEZ
Formation:	WOLFCAMP	Analysis Date:	5/30/08
Sample Point:	FRAC TANK 234	Analysis Cost:	\$100.00
Sample Date:	5/13/08		

Cloud Point:	<68 °F
Weight Percent Paraffin (by GC)*:	1.49%
Weight Percent Asphaltenes:	0.03%
Weight Percent Oily Constituents:	98.41%
Weight Percent Inorganic Solids:	0.07%

*Weight percent paraffin and peak carbon number includes only n-alkanes (straight chain hydrocarbons) greater than or equal to C20H42.

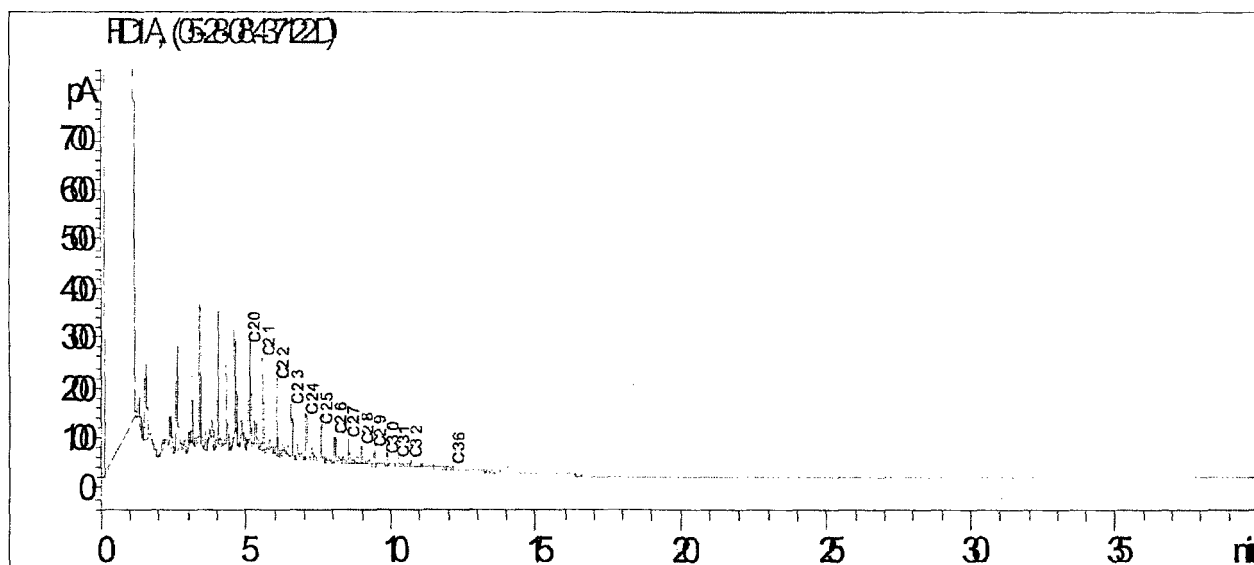

North Permian Basin Region
P.O. Box 740
Sundown, TX 79372-0740
(806) 229-8121
Lab Team Leader - Sheila Hernandez
(432) 495-7240

Water Analysis Report by Baker Petrolite

Company:	CIMAREX ENERGY	Sales RDT:	44212
Region:	PERMIAN BASIN	Account Manager:	WAYNE PETERSON (505) 910-9389
Area:	CARLSBAD, NM	Sample #:	43887
Lease/Platform:	WIGEON UNIT	Analysis ID #:	82014
Entity (or well #):	23 FEDERAL 1	Analysis Cost:	\$80.00
Formation:	UNKNOWN		
Sample Point:	SEPARATOR		

Summary		Analysis of Sample 43887 @ 75 °F					
Sampling Date:	05/14/08	Anions	mg/l	meq/l	Cations	mg/l	meq/l
Analysis Date:	05/15/08	Chloride:	55040.0	1552.48	Sodium:	32207.4	1400.94
Analyst:	WAYNE PETERSON	Bicarbonate:	329.4	5.4	Magnesium:	268.0	22.05
TDS (mg/l or g/m3):	90873.3	Carbonate:	0.0	0.	Calcium:	2780.0	138.72
Density (g/cm3, tonne/m3):	1.062	Sulfate:	225.0	4.68	Strontium:		
Anion/Cation Ratio:	1	Phosphate:			Barium:		
		Borate:			Iron:	23.5	0.85
		Silicate:			Potassium:		
Carbon Dioxide:	150 PPM	Hydrogen Sulfide:		0 PPM	Aluminum:		
Oxygen:		pH at time of sampling:		7.31	Chromium:		
Comments:		pH at time of analysis:			Copper:		
TEST RAN IN THE FIELD		pH used in Calculation:		7.31	Lead:		
					Manganese:		
					Nickel:		

Conditions		Values Calculated at the Given Conditions - Amounts of Scale in lb/1000 bbl										
Temp	Gauge Press.	Calcite CaCO ₃		Gypsum CaSO ₄ *2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄		CO ₂ Press
°F	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	psi
80	0	0.94	27.24	-1.11	0.00	-1.14	0.00	0.00	0.00	0.00	0.00	0.13
100	0	0.97	31.09	-1.16	0.00	-1.12	0.00	0.00	0.00	0.00	0.00	0.19
120	0	0.99	35.26	-1.20	0.00	-1.08	0.00	0.00	0.00	0.00	0.00	0.28
140	0	1.02	39.74	-1.23	0.00	-1.02	0.00	0.00	0.00	0.00	0.00	0.38

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: The reported CO2 pressure is actually the calculated CO2 fugacity. It is usually nearly the same as the CO2 partial pressure.


Scale Predictions from Baker Petrolite

Analysis of Sample 43887 @ 75 °F for CIMAREX ENERGY, 05/15/08


Calcite - CaCO_3

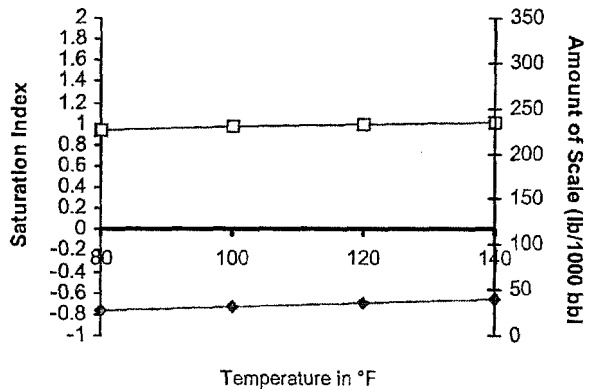


Barite - BaSO_4

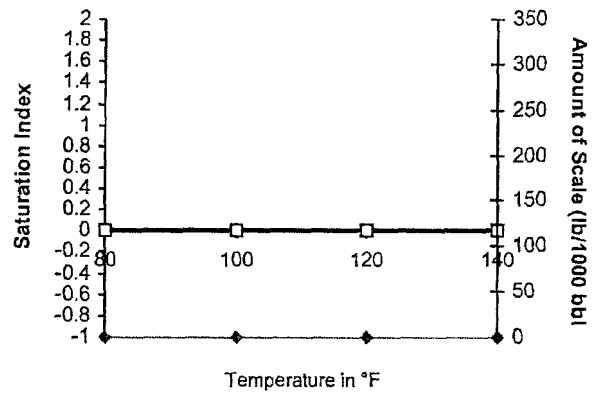


Gypsum - $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$

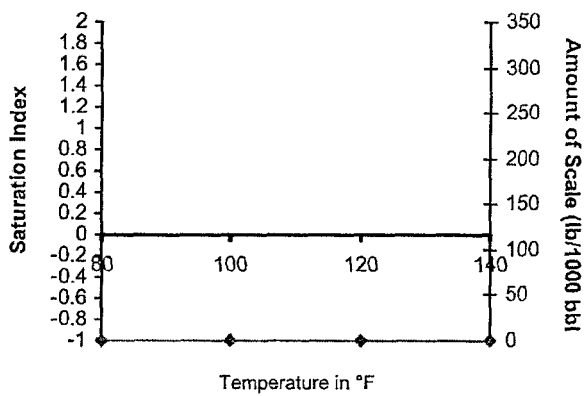


Anhydrite - CaSO_4

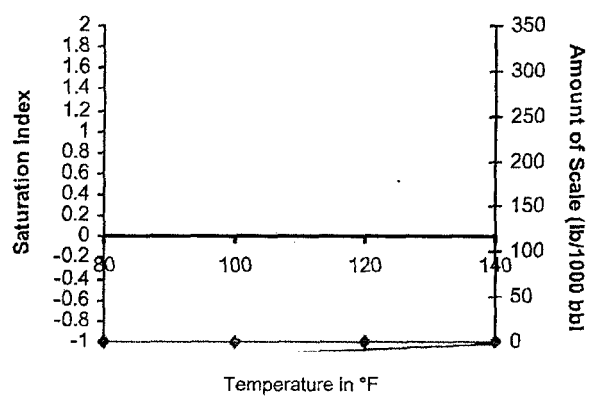

Carbon Dioxide Partial Pressure

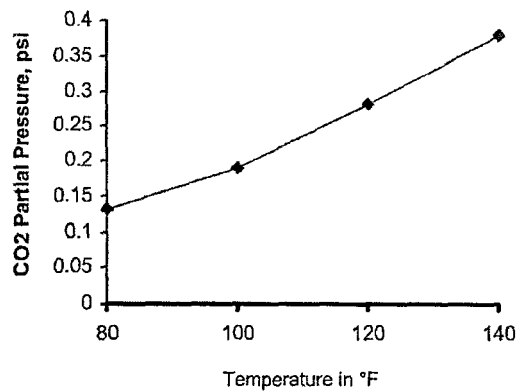

Celestite - SrSO_4

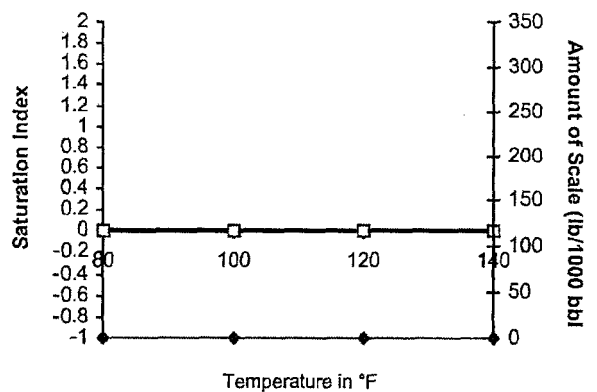



LABORATORY SERVICES
Natural Gas Analysis

www.permianls.com

575.397.3713 2609 W Marland Hobbs NM 88240

For: Cimarex Energy
Attention: Mark Cummings
600 N. Marienfeld, Suite 600
Midland, Texas 79701

Sample: Sta. # 309588438
Identification: Taos Fed. #3 Sales
Company: Cimarex Energy
Lease:
Plant:

Sample Data: Date Sampled 7/2/2014 10:30 AM
Analysis Date 7/9/2014
Pressure-PSIA 83
Sample Temp F 76.4
Atmos Temp F 76

Sampled by: K. Hooten
Analysis by: Vicki McDaniel

H2S =

Component Analysis

		Mol Percent	GPM
Hydrogen Sulfide	H2S		
Nitrogen	N2	0.618	
Carbon Dioxide	CO2	0.172	
Methane	C1	88.390	
Ethane	C2	7.080	1.889
Propane	C3	1.966	0.540
I-Butane	IC4	0.355	0.116
N-Butane	NC4	0.569	0.179
I-Pentane	IC5	0.198	0.072
N-Pentane	NC5	0.213	0.077
Hexanes Plus	C6+	<u>0.439</u>	<u>0.190</u>
		100.000	3.063

REAL BTU/CU.FT.		Specific Gravity	
At 14.65 DRY	1136.2	Calculated	0.6445
At 14.65 WET	1116.4		
At 14.696 DRY	1139.7		
At 14.696 WET	1120.3	Molecular Weight	18.6673
At 14.73 DRY	1142.4		
At 14.73 Wet	1122.6		

North Permian Basin Region
P.O. Box 740
Sundown, TX 79372-0740
(806) 229-8121


Lab Team Leader - Sheila Hernandez
(432) 495-7240

OIL ANALYSIS

Company:	CIMAREX ENERGY	Sales RDT:	33521
Region:	PERMIAN BASIN	Account Manager:	STEVE HOLLINGER (575) 910-9393
Area:	LOCO HILLS, NM	Analysis ID #:	5419
Lease/Platform:	TAOS FEDERAL LEASE	Sample #:	561758
Entity (or well #):	3	Analyst:	SHEILA HERNANDEZ
Formation:	UNKNOWN	Analysis Date:	09/13/11
Sample Point:	TANK	Analysis Cost:	\$125.00
Sample Date:	08/24/11		

Cloud Point:	89 ° F
Weight Percent Paraffin (by GC)*:	1.03%
Weight Percent Asphaltenes:	0.01%
Weight Percent Oily Constituents:	98.93%
Weight Percent Inorganic Solids:	0.03%

*Weight percent paraffin and peak carbon number includes only n-alkanes (straight chain hydrocarbons) greater than or equal to C20I142.

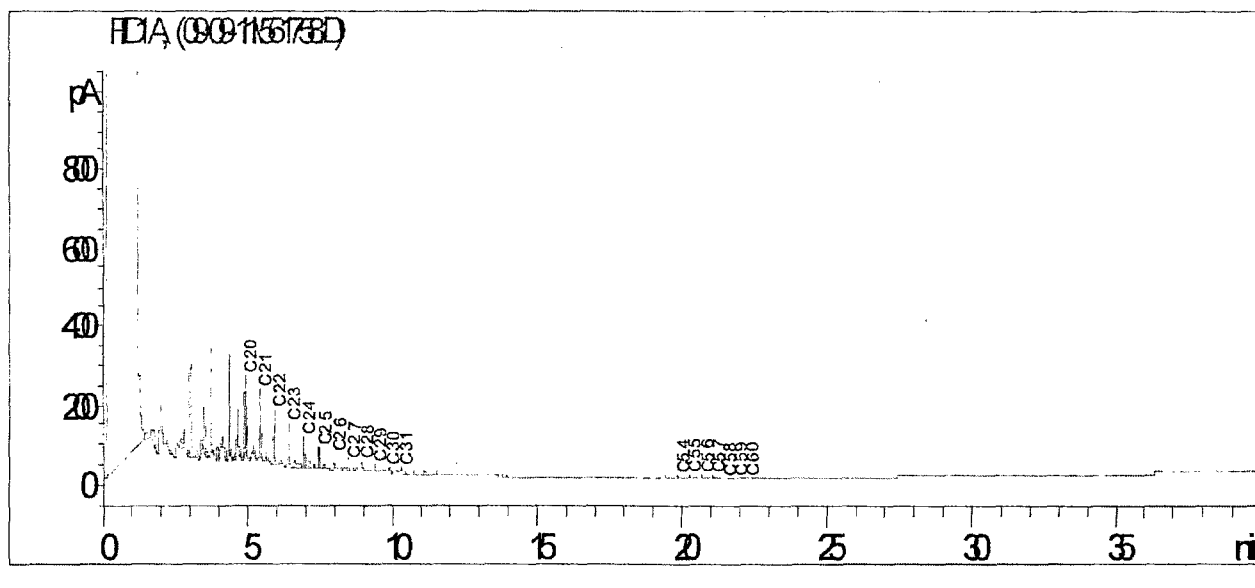

North Permian Basin Region
P.O. Box 740
Sundown, TX 79372-0740
(806) 229-8121
Lab Team Leader - Sheila Hernandez
(432) 495-7240

Water Analysis Report by Baker Petrolite

Company:	CIMAREX ENERGY	Sales RDT:	33521
Region:	PERMIAN BASIN	Account Manager:	STEVE HOLLINGER (575) 910-9393
Area:	CARLSBAD, NM	Sample #:	535681
Lease/Platform:	TAOS FEDERAL LEASE	Analysis ID #:	113272
Entity (or well #):	3	Analysis Cost:	\$90.00
Formation:	UNKNOWN		
Sample Point:	SEPARATOR		

Summary		Analysis of Sample 535681 @ 75 °F					
Sampling Date:	09/28/11	Anions	mg/l	meq/l	Cations	mg/l	meq/l
Analysis Date:	10/13/11	Chloride:	52535.0	1481.82	Sodium:	28338.7	1232.66
Analyst:	SANDRA GOMEZ	Bicarbonate:	146.0	2.39	Magnesium:	417.0	34.3
TDS (mg/l or g/m3):	86836.7	Carbonate:	0.0	0.	Calcium:	3573.0	178.29
Density (g/cm3, tonne/m3):	1.063	Sulfate:	83.0	1.73	Strontium:	1472.0	33.6
Anion/Cation Ratio:	1	Phosphate:			Barium:	22.0	0.32
		Borate:			Iron:	34.0	1.23
		Silicate:			Potassium:	215.0	5.5
					Aluminum:		
Carbon Dioxide:	150 PPM	Hydrogen Sulfide:		0 PPM	Chromium:		
Oxygen:		pH at time of sampling:		6	Copper:		
Comments:		pH at time of analysis:			Lead:		
RESISTIVITY 0.083 OHM-M @ 75°F		pH used in Calculation:		6	Manganese:	1.000	0.04
					Nickel:		

Conditions		Values Calculated at the Given Conditions - Amounts of Scale in lb/1000 bbl										
Temp	Gauge Press.	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄		CO ₂ Press
°F	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	psi
80	0	-0.61	0.00	-1.46	0.00	-1.49	0.00	-0.05	0.00	1.22	11.59	1.14
100	0	-0.51	0.00	-1.51	0.00	-1.47	0.00	-0.07	0.00	1.04	10.94	1.44
120	0	-0.40	0.00	-1.54	0.00	-1.43	0.00	-0.07	0.00	0.89	10.30	1.76
140	0	-0.28	0.00	-1.57	0.00	-1.36	0.00	-0.06	0.00	0.75	9.66	2.07

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.

Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: The reported CO2 pressure is actually the calculated CO2 fugacity. It is usually nearly the same as the CO2 partial pressure.



KB - 18' above GL

Cimarex Energy Co. of Colorado

White City 31 Federal #4

800' FSL & 1250' FEL

Sec. 31, T-24-S, R-26-E, Eddy Co., NM

S. Gengler

01/07/2010

13-3/8", 48# H-40 csg @ 320'
cmtd w/ 540 sx, cmt circ

9-5/8", 40# J-55 csg @ 2250'
cmtd w/ 1110 sx, cmt circ

TOC @ 5150' by CBL

DV Tool @ 7904'
cmtd w/ 1310 sx

278 jts 2-3/8" 4.7# L-80 Tbg

2-3/8" X 2-7/8" X-over @ 9004'

TOC @ 10400' by CBL
Atoka perms (10462' - 10492')

91 jts 2-7/8" 6.5# L-80 Tbg

Morrow perms (11217' - 11888')

PBTD @ 12012'
4-1/2" 11.6# P-110 @ 12080' cmtd w/ 850 sx, cmt circ
TD @ 12080'

Annular Gas Lift Valves @ 9039',
10587' & 11900'



Proposed Ciscamp WBD
KB - 18' above GL

Cimarex Energy Co. of Colorado

White City 31 Federal 4


API #: 30-015-35494

800' FSL & 1250' FEL

Sec. 31, T24S, R26E, Eddy Co., NM

M. Karner

3/6/2017

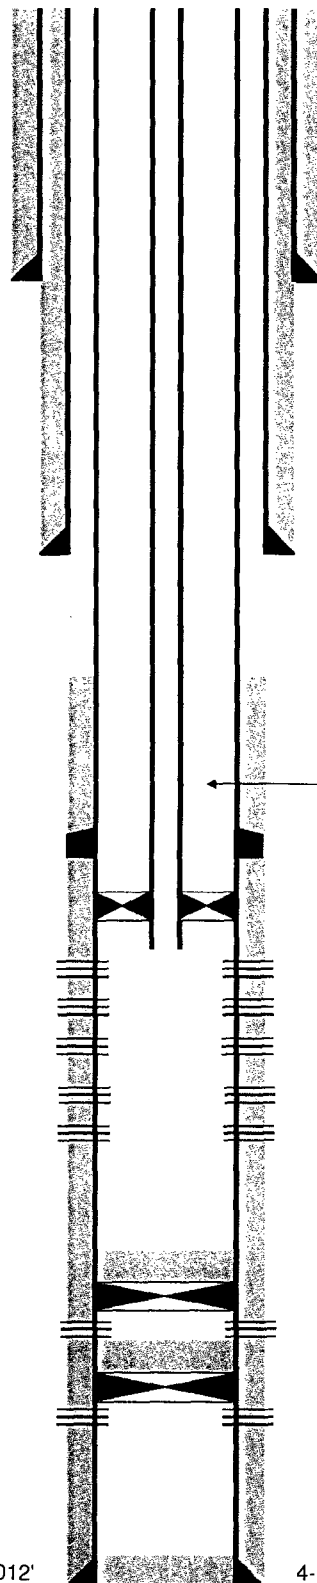

13-3/8" 48# H-40 csg @ 320'
cmtd w/ 540 sx, Cmt circ.

9-5/8" 40# J-55 @ 2250'
cmtd w/ 1110 sx, Cmt circ.

TOC @ 5150' by CBL

2-3/8" 4.7# L-80 tbg

DV @ 7904'
cmtd w/ 1310 sx

AS 1X Pkr @ 8,293'

Wolfcamp perfs (8,343' - 9,899')

Cisco Canyon perfs (9,900' - 10,299')

CIBP set at +/- 10,412' with 35' of cement bailed on top
Atoka perfs (10,462' - 10,492')

CIBP set at +/- 11,167' with 25 sx cement pumped on top
Morrow perfs (11,217' - 11,888')

PBT @ 12012'
TD @ 12080'

4-1/2" 11.6# P-110 csg @ 12080'
cmtd w/ 850 sx, cmt circ.



CONFIDENTIAL. March 6, 2016

Production Operations – Carlsbad Region, Permian Basin
White City 31 Federal #4 - Cisco Canyon and Wolfcamp (Ciscamp)
Proposed Commingling Allocation Factors. Eddy County, NM

Appendix D: Recompletion Procedure – White City 31 Federal #4

Well Data

KB	17'
TD	12,080'
PBTD	12,012'
Casing	13-3/8" 48# H-40 @ 320'. Cmt'd w/ 540 sx, cmt circ 9-5/8" 40# J-55 @ 2,250'. Cmt'd w/ 1,110 sx, cmt circ 4-1/2" 11.6# P-110 @ 12,080'. Cmt'd w/ 2,160 sx. DV @ 7,904'. TOC @ 5,150' by CBL
Tubing	2-3/8" 4.7# L-80 8rd, EOT @ 10,404'
Proposed RC Perfs	Wolfcamp (8,343' – 9,899') & Cisco Canyon (9,900' – 10,299')

Procedure

Notify BLM 24 hours prior to start of workover operations.

1. Test anchors prior to MIRU PU.
2. MIRU PU, rental flare, and choke manifold.
3. Kill well with produced water if available or FW as necessary.
4. ND WH, NU 5K BOP
5. Release packer and TOOH w/ 2-3/8" 4.7# L-80 tbg. Stand back Tubing.
6. TIH w/ CIBP on 2-3/8" 4.7# L-80 tbg to +/- 11,167'
7. Release from CIBP
8. Pump 25 sx down tubing
9. TOOH w/ tbg and stand back tbg
10. MIRU WL
11. RIH w/ GR/JB to tag TOC uphole of Morrow
12. RIH w/ WL to set CIBP at +/- 10,412'
13. RIH w/ WL to bail 35' of cement on top of CIBP at 10,412'
14. RU Pump truck and pressure test casing to 8,500 psi on a chart for 30 minutes with no more than 10% leak off.
15. ND 5k BOP, RDMO PU
16. RU two 10k frac valves and flow cross
17. MIRU water transfer with frac tanks to contain water to be pumped from frac pond
18. Test frac valves and flow cross prior to frac job. Arrange for these items, manlift, forklift, and Pace testers to be on location the day before the frac job to test so that we do not have the frac waiting on a successful test the following day.
19. RU frac valves, flow cross, goat head, and wireline lubricator.
20. RIH w/ gauge ring/junk basket for 4-1/2" 11.6# P-110 csg to +/- 10,299'



CONFIDENTIAL. March 6, 2016

Production Operations – Carlsbad Region, Permian Basin
White City 31 Federal #4 - Cisco Canyon and Wolfcamp (Ciscamp)
Proposed Commingling Allocation Factors. Eddy County, NM

21. Perforate Cisco Canyon from 9,900' – 10,299'.
22. RU frac and flowback equipment.
23. Acidize and frac Cisco Canyon perfs down casing.
24. Set 10k flow through composite plug 15' uphole of top perforation
25. Test to 8,500 psi
26. Perforate Wolfcamp from 8,343' – 9,899'.
27. Acidize and frac Wolfcamp perfs down casing.
28. RD frac
29. MIRU 2" coiled tbg unit.
30. RIH w/ blade mill & downhole motor on 2" CT and drill out sand and composite plugs using freshwater for circulation. Pump sweeps each time a plug is tagged, each time a plug is drilled out, and every 60 bbls pumped.
31. Clean out to PBTD
32. POOH w/ blade mill, motor & CT
33. RDMO coiled tbg unit.
34. Flow back well for 24 hours, then SI well overnight.
35. RU wireline and lubricator.
36. RIH w/ GR/JB for 5-1/2" 17# P-110 to +/- 8,293'
37. RIH w/ 2-7/8" WEG, 2-7/8" pump out plug pinned for 1,500 – 2,000 psi differential pressure, 10' 2-3/8" 4.7# L-80 tbg sub w/ 1.875" XN profile nipple w/ blanking plug in place, 5-1/2" Arrowset 1X packer and on-off tool stinger w/ 1.875" X profile nipple. Set packer +/- 8,293'. From downhole up:
 - a. 2-3/8" pump out plug pinned for 1,500 – 2,000 psi differential pressure
 - b. 1.875" XN profile nipple
 - c. 10' 2-3/8" 4.7# L-80 tbg sub
 - d. 5-1/2" x 2-3/8" Arrowset 1X packer and on-off tool stinger w/ 1.875" X profile nipple
38. RD WL and lubricator
39. ND goat head and frac valve, NU BOP, MIRU Pulling Unit
40. TIH w/ on/off tool overshot, GLVs, and 2-3/8" 4.7# L-80 tbg.
41. Latch overshot onto on-off tool and space out tubing
42. ND BOP, NU WH
43. RDMO pulling unit
44. RU pump truck and pump out plug. Put well on production.
45. **Run Production Log for allocation purposes after recovering load. Run additional production logs if actual production varies significantly from expected performance. Send copies of these logs to BLM and file for an adjustment of allocation factor if necessary.**

White City 31 Federal 4
30-015-35494
Cimarex Energy Company of CO
March 7, 2017
Conditions of Approval

Notify BLM at 575-361-2822 a minimum of 24 hours prior to commencing work.

Work to be completed by June 07, 2017.

- 1. Operator shall set a CIBP at 11,167' (50' above top most perf) and place 215' Class H cement on top. Tag required at a minimum of 10,952' to seal the top of the Morrow Formation.**
- 2. Operator shall set a CIBP at 10,412' (50' above top most perf) and place 35' Class H cement on top to isolate the Atoka Formation.**
- 3. Must conduct a casing integrity test before perforating and fracturing. Submit results to BLM. The CIT is to be performed on the production casing to max treating pressure. Notify BLM if test fails.**
4. Before casing or a liner is added or replaced, prior BLM approval of the design is required. Use notice of intent Form 3160-5.
5. Surface disturbance beyond the originally approved pad must have prior approval.
6. Closed loop system required.
7. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.
8. Operator to have H2S monitoring equipment on location.

9. A minimum of a **5000 (5M)** BOP to be used. All blowout preventer (BOP) and related equipment (BOPE) shall comply with reasonable well control requirements. A two ram system with a blind ram and a pipe ram designed for the size of the work string shall be adequate. Tapered work strings will require an additional pipe ram. The manifold shall comply with Onshore Oil and Gas Order #2 Attachment I (5M Diagrams of Choke Manifold Equipment). The accumulator system shall have an immediately available power source to close the rams and retain 200 psi above pre-charge. The pre-charge test shall follow requirements in Onshore Order #2.
10. **Subsequent sundry required detailing work done and completion report for the new formations. Operator to include well bore schematic of current well condition when work is complete.**
11. **See attached for general requirements.**

JAM 030717

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Permanent Abandonment of Production Zone Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Eddy County, call 575-361-2822. For wells in Lea County, call 575-393-3612

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either **Neat Class "C"**, for up to 7,500 feet of depth or **Neat Class "H"**, for deeper than 7,500 feet plugs.

6. **Subsequent Plug back Reporting:** Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.