

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NMOCD
Artesia

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NMNM0467932
2. Name of Operator COG OPERATING LLC Contact: KANICIA CASTILLO E-Mail: kcastillo@concho.com		6. If Indian, Allottee or Tribe Name
3a. Address 600 W ILLINOIS AVE MIDLAND, TX 79701	3b. Phone No. (include area code) Ph: 432-685-4332	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 20 T17S R30E Mer NMP 990FSL 1650FWL		8. Well Name and No. WD MCINTYRE E 6
		9. API Well No. 30-015-31564
		10. Field and Pool or Exploratory Area LOCO HILLS; GLORIETA YESO <i>Grayburg-JACKSON SR-065A</i>
		11. County or Parish, State EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input checked="" type="checkbox"/> Recomplete <input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

COG Operating LLC, respectfully requests to recomplete to the San Andres as follows:

W D MCINTYRE E #6

We are going to set a CIBP at 4406? (50? above the YESO perfs) w/ 40? of CMT on top of the plug to have our PBD @ 4366?. We plan to have our top perfs from 3,220? ? 3,610? and bottom perfs from 3,651?-4,020?. Ideally, we like to have 200?-300? of rathole below our bottom perfs to give our bottom hole assembly room and prevent tubing from getting stuck with sand. In addition to having desired rathole space, this gives COG the option to re-enter the Glorieta/Yeso formation at later time.

Equipment Pull Procedure
? MIRU WSU, NU BOP

SC 4-26-18
Accepted for record - NMOCD

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

RECEIVED

APR 26 2018

DISTRICT II-ARTESIA O.C.D.

14. I hereby certify that the foregoing is true and correct. Electronic Submission #408916 verified by the BLM/Well Information System For COG OPERATING LLC, sent to the Carlsbad Committed to AFMSS for processing by PRISCILLA PEREZ on 03/26/2018 ()	
Name (Printed/Typed) KANICIA CASTILLO	Title PREPARER
Signature (Electronic Submission)	Date 03/22/2018
THIS SPACE FOR FEDERAL OR STATE OFFICE USE	
APR 22 2018	
Approved By _____	Title _____ Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	
Office _____	
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	

(Instructions on page 2)

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

APR 5-4-18

Additional data for EC transaction #408916 that would not fit on the form

32. Additional remarks, continued

? Unset pump and POOH with rod and tbg
? PU scraper and scrape down to 4450?
? RU Wireline
? Make gauge ring/ junk basket run
? Set CIBP @ 4,406?
? Wireline truck dump 40? Class C cement of top of CIBP
? Tag cement plug to verify depth of 4,366?
? Pull up 4? to circulate hole clean with fresh water, and displace w/ 2% KCL and 1% packer corrosion inhibitor.
? Test Casing to 4,300 psi and report back to engineering if the pressure holds.
? Dump bail acid in the perf interval
? RIH w/ perforating guns and perforate San Andres Zone from 3,651?-4,020?, w/ 3 spf, 120? phasing, 54 holes
? NU 5K frac valve
? Secure wellbore
? RDMO WSU

Tentative Recompletion Procedure
? RU Elite Well Services Frac Crew
? Acidize w/ 1500 gals of 15% HCl.
? Slickwater Frac zone w/ 375,000 # of sand.
? Record ISIP and FG, Get 5, 10, 15 min SIP
? Rig up Wireline
? RIH w/ WL and set Composite Plug @ 3,630?
? Perforate San Andres Zone from 3,220?-3,610?, w/ 3 spf, 120? phasing, 54 holes.
? Acidize w/ 1500 gals of 15% HCl.
? Slickwater Frac zone w/ 375,000 # of sand.
? Record ISIP and FG, Get 5, 10, 15 min SIP
? RDMO Elite

Please see attachment for full procedure.

W D MCINTYRE E #6

We are going to set a CIBP at 4406' (50' above the YESO perfs) w/ 40' of CMT on top of the plug to have our PBD @ 4366'. We plan to have our top perfs from 3,220' – 3,610' and bottom perfs from 3,651'– 4,020'. Ideally, we like to have 200'-300' of rathole below our bottom perfs to give our bottom hole assembly room and prevent tubing from getting stuck with sand. In addition to having desired rathole space, this gives COG the option to re-enter the Glorietta/Yeso formation at later time.

Equipment Pull Procedure

- MIRU WSU, NU BOP
- Unset pump and POOH with rod and tbg
- PU scraper and scrape down to 4450'
- RU Wireline
- Make gauge ring/ junk basket run
- Set CIBP @ 4,406'
- Wireline truck dump 40' Class C cement of top of CIBP
- Top cement plug to verify depth of 4,366'
- Pull up 4' to circulate hole clean with fresh water, and displace w/ 2% KCL and 1% packer corrosion inhibitor.
- Test Casing to 4,300 psi and report back to engineering if the pressure holds.
- Dump bail acid in the perf interval
- RIH w/ perforating guns and perforate San Andres Zone from 3,220'– 3,610', w/ 3 spf, 120° phasing, 54 holes
- NU 5K frac valve
- Secure wellbore
- RDMO WSU

Tentative Recompletion Procedure

- RU Elite Well Services Frac Crew
- Acidize w/ 1500 gals of 15% HCl.
- Slickwater Frac zone w/ 375,000 # of sand.
- Record ISIP and FG, Get 5, 10, 15 min SIP
- Rig up Wireline
- RIH w/ 40' of 2-7/8" J55 6.5# tbg to 4,366'
- Perforate San Andres Zone from 3,220'– 3,610', w/ 3 spf, 120° phasing, 54 holes.
- Acidize w/ 1500 gals of 15% HCl.
- Slickwater Frac zone w/ 375,000 # of sand.
- Record ISIP and FG, Get 5, 10, 15 min SIP
- RDMO Elite

Return to Production Procedure

- MIRU WSU
- RIH with bit and jet tool to drill out composite plugs
- Clean out fill to new 4,366' depth
- RIH with production tubing as follows:
 - (96) jts 2-7/8" J55 6.5# tbg
 - (1) 2' marker joint

- (2) jts 2-7/8" J55 6.5# tbg
 - TAC @3,187'
 - (26) jts 2-7/8" J55 6.5# tbg
 - SN @ 4,032'
 - (1) 20' MSMA
 - EOT @ 4,052'
- ND BOP, set TAC, flange up WH
- RIH w/ rod design as follows:
 - (1) 26' SMPR
 - (1) 6' 3/4" pony rod
 - (155) 3/4" D rods
 - (6) 1-5/8" K bars
 - (1) 25-150 RHBC-20'
- Hang on, load tubing and note pump action and alignment
- **PLEASE ADJUST UNIT TO 2.5 SPV**
- Clean location
- Update rod and tubing detail in Well View
- All charges will hit AFE #
- PWOP and contact Robby Miller before turning on
- RDMO, TOTP


Current
COG Operating LLC

Lease & Well # McIntyre E # 6

Spud: 2/6/01

Elevation - 3629

KB -

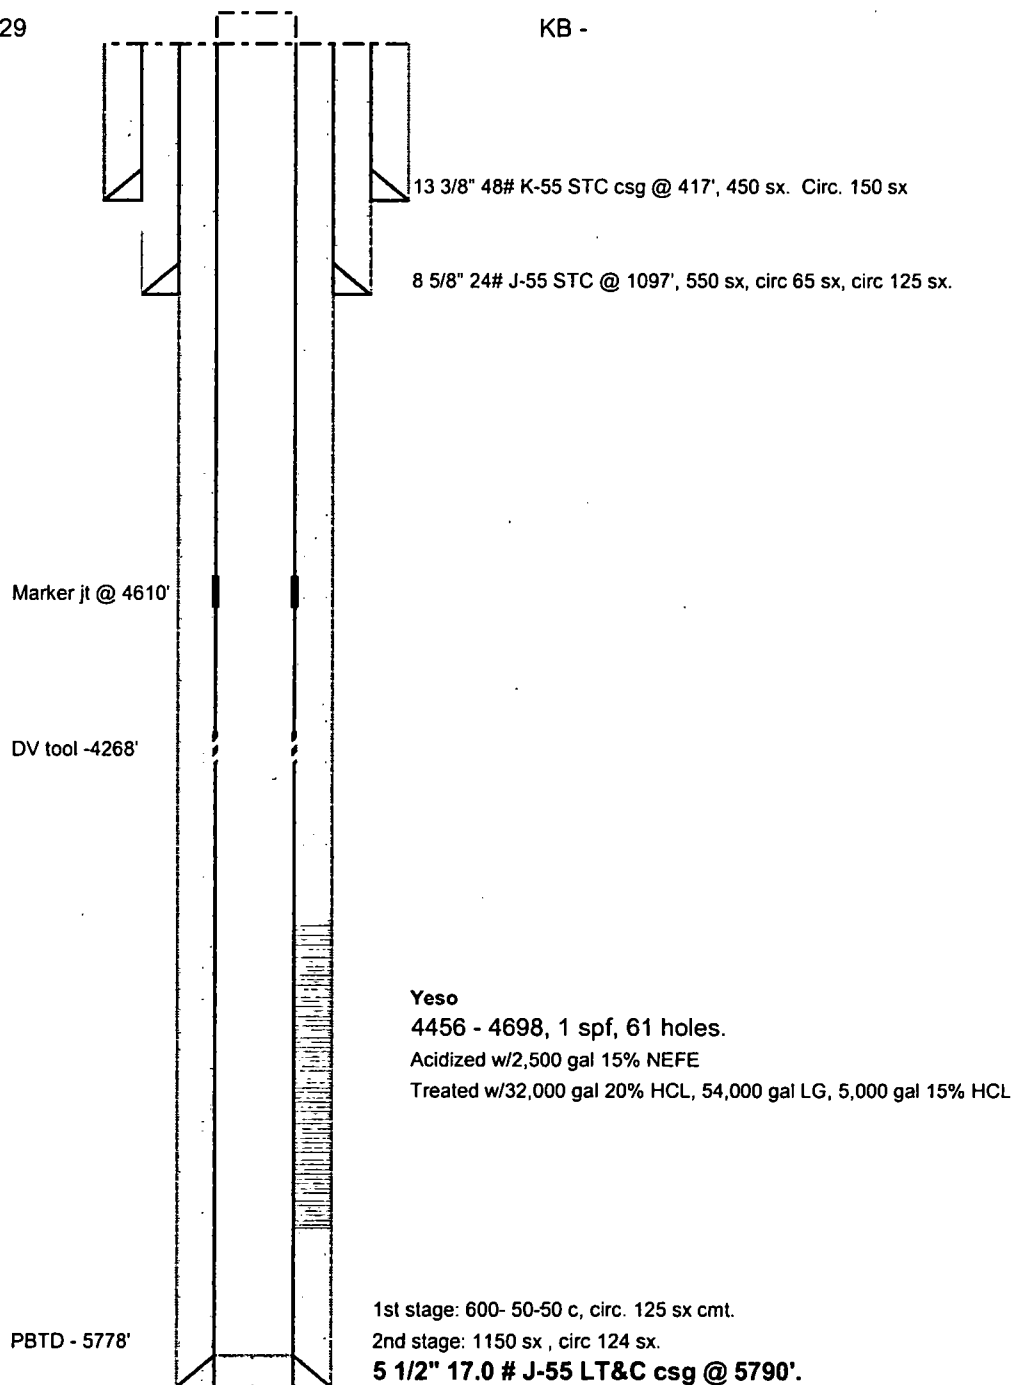

3/22/2018

McIntyre E #6 Wellbore diagram

SH

Proposed

COG Operating LLC

Lease & Well #

McIntyre E # 6

Spud: 2/6/01

Elevation - 3629

WELL NAME W D MCINTYRE #6

SHL: N-17-17S-30E 990

BHL: N-17-17S-30E 990


FORMATIC Yes

LEGAL: N-17-17S-30E

KB -

3220-4020

3630

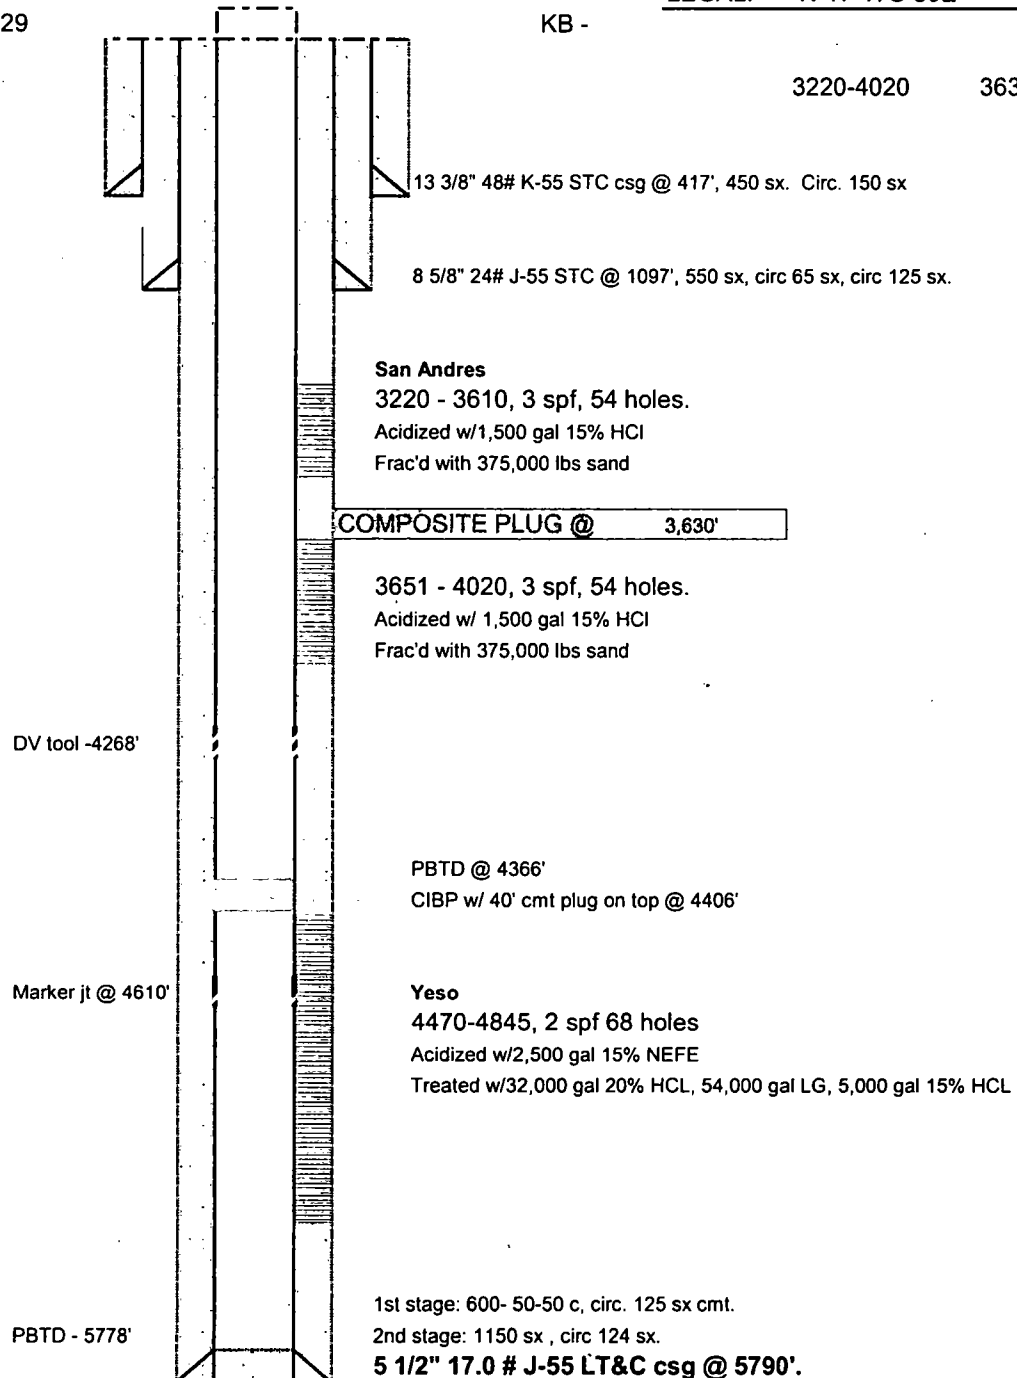

3/22/2018

McIntyre E #6 Wellbore diagram Updated

SH

PROSPECT NAME:	Loco Hills
STATE & COUNTY:	New Mexico, Eddy
OBJECTIVE:	Two stage Recompletion to GB-SA
DEPTH:	4,406

	1	2	3	4	5	6	7	8	9	10	11	12
DATE	2220	2241.7	2262	2285	2307	2329	2350	2372	2394	2415	2437	2459
DATE	2	3	3	3	3	3	3	3	3	3	3	3
DATE	2190											
DATE	21.7											
DATE	962	375000										

	1	2	3	4	5	6	7	8	9	10	11	12
DATE	2220	2241.7	2262	2285	2307	2329	2350	2372	2394	2415	2437	2459
DATE	2	3	3	3	3	3	3	3	3	3	3	3
DATE	2190											
DATE	21.7											
DATE	962	375000										

13	14	15	16	17	18
2440	2409	2404	2546	2567	2580
2	2	2	2	2	2

13	14	15	16	17	18
2440	2409	2404	2546	2567	2580
2	2	2	2	2	2

RECEIVED

APR 26 2018

DISTRICT II-ARTESIA COUNTY

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised June 10, 2003

Submit to appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-31564	² Pool Code 28509	³ Pool Name Grayburg Jackson; SR-Q-G-SA
⁴ Property Code 302576	⁵ Property Name W D McIntyre E	⁶ Well Number 6
⁷ OGRID No. 229137	⁸ Operator Name COG OPERATING LLC	⁹ Elevation 3627

¹⁰ Surface Location



UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	20	17S	30E		990	South	1650	West	Eddy

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

				¹⁷ OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</i>  Signature Kanicia Carrillo Printed Name Regulatory Analyst Title and E-mail Address 07/21/15 Date
				¹⁸ SURVEYOR CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i> Referred Original Plat Date of Survey Signature and Seal of Professional Surveyor:
1650'				Certificate Number

RW 5-4-18

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED
APR 26 2018
DISTRICT II-ARTESIA O.C.D.

Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-31564	² Pool Code 96718	³ Pool Name Loco Hills; Glorieta-Yeso
⁴ Property Code 302576	⁵ Property Name W D McIntyre E	⁶ Well Number 6
⁷ OGRID No. 229137	⁸ Operator Name COG OPERATING LLC	⁹ Elevation 3627

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	20	17S	30E		990	South	1650	West	Eddy

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p>¹⁷ OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</i></p> <p>Signature Kanicia Carrillo</p> <p>Printed Name Regulatory Analyst</p> <p>Title and E-mail Address 07/21/15</p> <p>Date</p>
	<p>¹⁸ SURVEYOR CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>Referred Original Plat</p> <p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p>
	<p>Certificate Number</p>

WD McIntyre E 6
30-015-31564
COG Operating LLC
April 12, 2018
Conditions of Approval

Work to be completed by July 12, 2018.

- 1. Operator shall place a CIBP at 4,406 and place 40' Class C Cement on top of the CIBP. WOC and TAG.**

Note: At a later date, operator will need to add 110' of cement to the CIBP to properly seal the Glorietta Formation.

- 2. Must conduct a casing integrity test before perforating and fracturing. Submit results to BLM. The CIT is to be performed on the production casing to max treating pressure. Notify BLM if test fails.**
- 3. Before casing or a liner is added or replaced, prior BLM approval of the design is required. Use notice of intent Form 3160-5.**
- 4. Surface disturbance beyond the originally approved pad must have prior approval.**
- 5. Closed loop system required.**
- 6. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.**
- 7. Operator to have H2S monitoring equipment on location.**
- 8. A minimum of a 2000 (2M) BOP to be used. All blowout preventer (BOP) and related equipment (BOPE) shall comply with reasonable well control requirements. A two ram system with a blind ram and a pipe ram designed for the size of the work string shall be adequate. Tapered work strings will require an additional pipe ram. The manifold shall comply with Onshore Oil and Gas Order #2 Attachment I (2M Diagrams of Choke Manifold Equipment). The accumulator system shall have an immediately available power source to close the rams and retain 200 psi above pre-charge. The pre-charge test shall follow requirements in Onshore Order #2.**

9. **Subsequent sundry required detailing work done and completion report for the formation. Operator to include new well plat and well bore schematic of current well condition when work is complete.**
10. **See attached for general requirements.**

JAM 041218

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Permanent Abandonment of Production Zone Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Eddy County, call 575-361-2822. For wells in Lea County, call 575-393-3612

3. Blowout Preventers: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. Mud Requirement: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Subsequent Plug back Reporting: Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.