


Submit 3 Copies To Appropriate District Office •
District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103 Revised March 25, 1999	
WELL API NO. 30-005-61527	
5. Indicate Type of Lease STATE ☐ FEE ☒	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name: Ric	
8. Well No. 7	
9. Pool name or Wildcat Pecos Slope Abo	



SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☐ Gas Well ☒ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 S. 4th Street Artesia, NM 88210

4. Well Location
Unit Letter A : 660 feet from the North line and 660 feet from the East line
Section 31 Township 6S Range 25E NMPM Chaves County
10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3838' GR

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPLETION ☐	CASING TEST AND CEMENT JOB ☐	
OTHER: ☐		OTHER: ☐	

Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

Yate Petroleum Corporation proposes to plug and abandon this well as follows:

1. Notify the NMOCD at least 24 hrs before starting the work. Load the tubing and the casing with 2% KCL water.
2. Set a 4-1/2" gauge ring to 3500' to make sure the casing is clear then RIH with a 4-1/2" CIBP and set at 3500'. Circulate the hole with 10.0 ppg mud with 25#/bbl of gel in the mud and spot 25 sx cement on top of the CIBP.
3. Perforate with 4 holes at 1300' and squeeze with 100' sx cement behind the casing to cover the Glorieta and the base of the 8-5/8" casing. Perforate with 4 holes at 100' and squeeze with 50 sx cement behind the casing to the surface. Spot 5 sx cement at the surface to fill up the casing. - WOC JH HES - TAG
4. ND the BOP and remove the wellhead and install a dry-hole marker and clean up the location.

- ① Place 100' of cnt inside & outside of Csg.
- ② Perf Csg @ 1000' - Place 100' of cnt inside & outside of Csg. 900-1000' TAG
- ③

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE June 5, 2003

Type or print name Tina Huerta Telephone No. 505-748-1471
(This space for State use)

APPROVED BY [Signature] TITLE [Signature] DATE JUN 11 2003
Conditions of approval, if any:

WELL NAME: Ric #7 **Field:** Pecos Slope Abo
LOCATION: Unit A, Sec 31, T6S-25E 660' FNL & 660' FEL **Chaves County**
GL: 3838' **ZERO:** **KB:** 3851'
SPUD DATE: 4/11/82 **COMPLETION DATE:** 5/12/82
COMMENTS: 30-005-61527

13 3/8" 48# H-40	256'
8 5/8" 24# K-55	950'
4 1/2" 10.5# K-55 ST&C	4153'

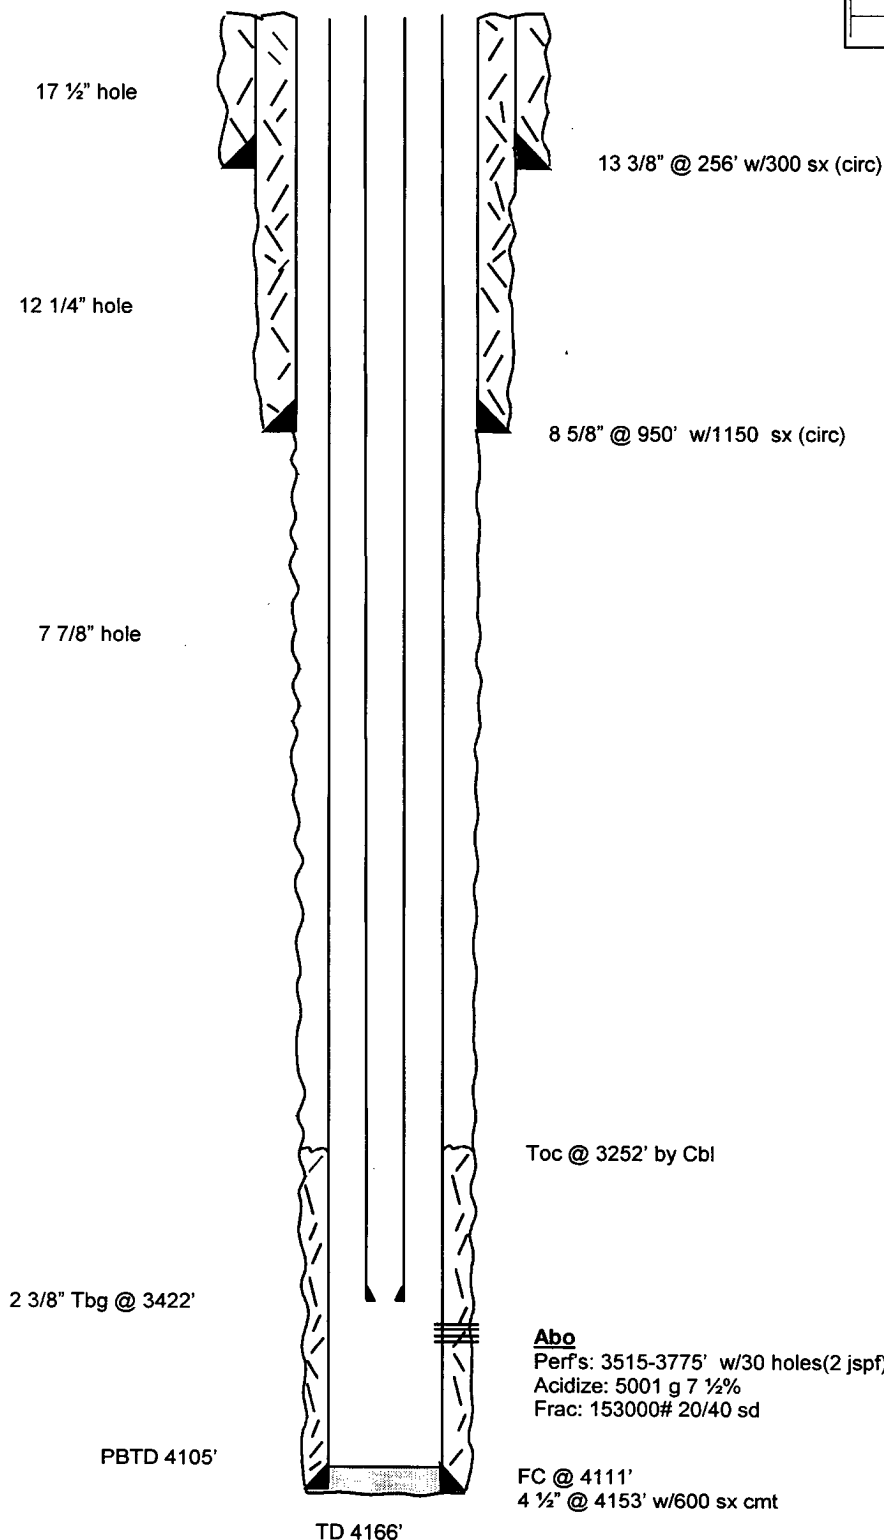


TOPS

San Andres 328'
 Glorieta 1323'
 Tubb 2820'
 Abo 3474'

BEFORE

WELL NAME: Ric #7 **Field:** Pecos Slope Abo
LOCATION: Unit A, Sec 31, T6S-25E 660' FNL & 660' FEL Chaves County
GL: 3838' **ZERO:** **KB:** 3851'
SPUD DATE: 4/11/82 **COMPLETION DATE:** 5/12/82
COMMENTS: 30-005-61527

13 3/8" 48# H-40	256'
8 5/8" 24# K-55	950'
4 1/2" 10.5# K-55 ST&C	4153'

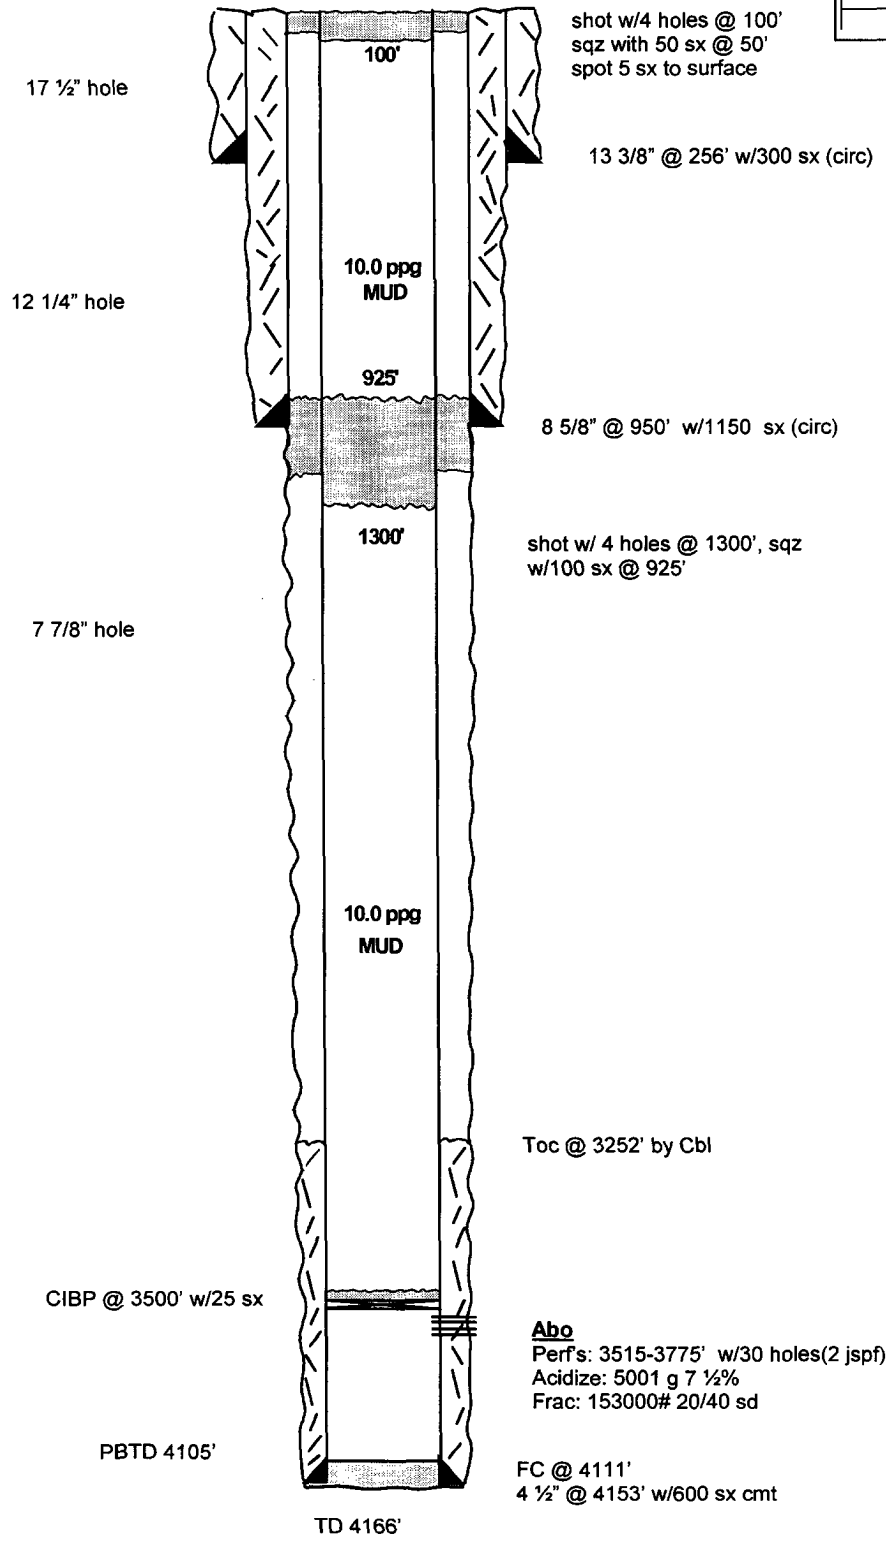

TOPS

San Andres	328'
Glorieta	1323'
Tubb	2820'
Abo	3474'

AFTER

Abo
 Perf's: 3515-3775' w/30 holes(2 jsfp), shot on 5/1/82
 Acidize: 5001 g 7 1/2%
 Frac: 153000# 20/40 sd
 FC @ 4111'
 4 1/2" @ 4153' w/600 sx cmt

OPERATOR: Yates Petroleum Corp.		API#	30-005-61527		
WELL: Ric # 7asco KD Com # 3		LOCATION:	A-31-6-25		
SURFACE CSG-	HOLE SIZE "	CSG. SIZE 13 3/8"	SET @ 256'	SX. CMT.	TOC. Circ
INT.CSG-	HOLE SIZE "	CSG. SIZE 8 5/8"	SET @ 950'	SX. CMT.	TOC. Circ
LONG STRING-	HOLE SIZE 7 7/8"	CSG. SIZE 4.5"	SET @ 4153'	SX. CMT.	TOC. 3252'
OTHER-					

