



**PHOENIX
TECHNOLOGY SERVICES**

December 11, 2018

Oil Conservation Division
State of New Mexico
811 S. First St.
Artesia, New Mexico 88210

RECEIVED

DEC 31 2018

DISTRICT II-ARTESIA O.C.D.

Dear District 2 - Artesia

Re: EOG Resources
Williams No. 009
Eddy Co., New Mexico
API #30-015-25061
Job No. 63934

Enclosed please find the Survey Data Certification, and the original Plat and one copy of the Survey Report performed on the above referenced Well by Phoenix Technology Services, Inc. (P-5 No. 606018). Other information required by your office is as follows:

Name & Title of Surveyor	Drainhole Number	Surveyed Depths		Dates Performed		Type of Survey
		From	To	Start	End	
Oscar Velasquez	009	0	3,225	11/30/18	11/30/18	Gyro

A certified plat on which the bottom hole location is oriented both to the surface location and to the lease lines (or unit lines in case of pooling) is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Best Regards,

Brittany Carley

Brittany Carley
Operations Administrator

SURVEY CERTIFICATION FORM

3610 Elkins Road Midland, TX 79705 t:432-684-0057 f: 432-686-7964



Company: EOG Resources

Job #: 63934

Well Name: Williams No. 009

County/State: Eddy Co., New Mexico

Survey Instrument Type: North Seek Rate Gyro

API # 30-015-25061

TIE-IN DATA

Measure Depth (ft)	Vertical Depth (ft)	Inclination (°)	Azimuth (°)	N-S Coordinates	E-W Coordinates	Data Source
0	0	0	0	0	0	Surface

First Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
2018-11-30	0	0	0

Last Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
2018-11-30	3225	1.38	58.61

Projected TD Survey

Date	Depth (ft)	Inclination (°)	Azimuth (°)
0	0	0	0

Grid Correction
0


Gyro Operator: Phoenix Technology Services USA Ltd.

Gyro Supervisor: Angel Guebara

To the best of my knowledge I certify this survey data to be correct and true

Date: 2018-11-30

Print Name: Oscar Velasquez

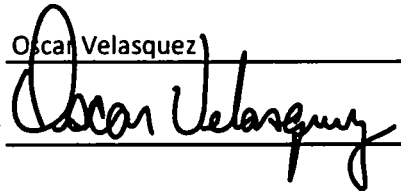Signature: 



Company: EOG Resources
 Well: Williams No. 009
 Location: Eddy Co., New Mexico
 Rig: Pulling Unit

Job Number: 63934
 Grid Corr.: 0.00
 Lat: 32.720460
 Long: -104.332340
 Grid Ref:

Date: 11-30-18
 Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: Ground Level
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
Enter Tie-In Survey on Line 10													
FIELD COPY, NON-DEFINITIVE													
TIE IN	0			0	0	0	0	0					
Gyro	100.00	0.54	336.60	100	100.00	0.43	0.43 N	0.19 W	0.47	336.60	0.54	0.54	336.60
	125.00	0.64	297.73	25	125.00	0.61	0.61 N	0.36 W	0.70	329.44	1.62	0.40	-155.48
	150.00	0.31	196.46	25	150.00	0.61	0.61 N	0.50 W	0.79	320.44	3.05	-1.32	-405.08
	175.00	0.53	314.26	25	175.00	0.62	0.62 N	0.60 W	0.87	315.90	2.91	0.88	471.20
	200.00	0.84	310.89	25	199.99	0.82	0.82 N	0.82 W	1.16	314.95	1.25	1.24	-13.48
	225.00	0.65	301.91	25	224.99	1.02	1.02 N	1.08 W	1.49	313.22	0.89	-0.76	-35.92
	250.00	0.71	349.09	25	249.99	1.24	1.24 N	1.23 W	1.75	315.28	2.19	0.24	188.72
	275.00	1.30	335.94	25	274.99	1.66	1.66 N	1.38 W	2.15	320.24	2.52	2.36	-52.60
	300.00	0.88	318.46	25	299.98	2.06	2.06 N	1.62 W	2.62	321.79	2.12	-1.68	-69.92
	325.00	0.86	346.12	25	324.98	2.38	2.38 N	1.79 W	2.98	323.06	1.67	-0.08	110.64
	350.00	1.33	338.82	25	349.97	2.84	2.84 N	1.94 W	3.44	325.60	1.96	1.88	-29.20
	375.00	0.99	318.31	25	374.97	3.27	3.27 N	2.19 W	3.93	326.17	2.13	-1.36	-82.04
	400.00	0.94	350.02	25	399.97	3.63	3.63 N	2.37 W	4.34	326.87	2.12	-0.20	126.84
	425.00	1.35	336.36	25	424.96	4.10	4.10 N	2.52 W	4.82	328.41	1.96	1.64	-54.64
	450.00	1.11	322.83	25	449.96	4.57	4.57 N	2.79 W	5.35	328.59	1.50	-0.96	-54.12
	475.00	1.20	353.69	25	474.95	5.02	5.02 N	2.96 W	5.83	329.44	2.48	0.36	123.44
	500.00	1.47	346.16	25	499.94	5.59	5.59 N	3.07 W	6.38	331.24	1.29	1.08	-30.12
	525.00	0.94	345.00	25	524.94	6.10	6.10 N	3.20 W	6.89	332.33	2.12	-2.12	-4.64
	550.00	1.48	356.87	25	549.93	6.62	6.62 N	3.27 W	7.38	333.72	2.37	2.16	47.48
	575.00	1.27	340.51	25	574.93	7.20	7.20 N	3.38 W	7.96	334.87	1.77	-0.84	-65.44
	600.00	1.43	6.00	25	599.92	7.78	7.78 N	3.44 W	8.50	336.14	2.46	0.64	-1338.04
	625.00	1.90	350.24	25	624.91	8.49	8.49 N	3.48 W	9.18	337.74	2.61	1.88	1376.96
	650.00	1.58	3.43	25	649.90	9.25	9.25 N	3.53 W	9.90	339.13	2.04	-1.28	-1387.24
	675.00	2.10	2.40	25	674.88	10.05	10.05 N	3.49 W	10.64	340.87	2.08	2.08	-4.12
	700.00	1.80	357.91	25	699.87	10.90	10.90 N	3.48 W	11.44	342.28	1.35	-1.20	1422.04
	725.00	2.54	10.68	25	724.85	11.84	11.84 N	3.39 W	12.31	344.00	3.52	2.96	-1388.92
	750.00	2.73	5.38	25	749.83	12.97	12.97 N	3.23 W	13.37	346.00	1.24	0.76	-21.20
	775.00	2.97	15.20	25	774.79	14.19	14.19 N	3.01 W	14.51	348.03	2.17	0.96	39.28



Company: EOG Resources
 Well: Williams No. 009
 Location: Eddy Co., New Mexico
 Rig: Pulling Unit

Job Number: 63934
 Grid Corr.: 0.00
 Lat: 32.720460
 Long: -104.332340
 Grid Ref:

Calculation Method: Minimum Curvature
 Proposed Azimuth: _____
 RKB - MSL in feet: Ground Level
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	800.00	3.57	11.61	25	799.75	15.58	15.58 N	2.68 W	15.81	350.23	2.53	2.40	-14.36
	825.00	2.99	11.88	25	824.71	16.98	16.98 N	2.39 W	17.15	351.98	2.32	-2.32	1.08
	850.00	3.52	21.39	25	849.67	18.33	18.33 N	1.98 W	18.44	353.84	3.02	2.12	38.04
	875.00	3.64	13.75	25	874.62	19.82	19.82 N	1.51 W	19.87	355.65	1.97	0.48	-30.56
	900.00	3.06	17.34	25	899.58	21.22	21.22 N	1.12 W	21.25	356.98	2.47	-2.32	14.36
	925.00	3.09	21.58	25	924.54	22.49	22.49 N	0.67 W	22.50	358.28	0.92	0.12	16.96
	950.00	3.13	12.99	25	949.51	23.78	23.78 N	0.27 W	23.78	359.34	1.87	0.16	-34.36
	975.00	2.73	18.22	25	974.48	25.01	25.01 N	0.07 E	25.01	0.15	1.92	-1.60	20.92
	1000.00	2.80	20.97	25	999.45	26.15	26.15 N	0.47 E	26.15	1.03	0.60	0.28	11.00
	1025.00	2.94	13.91	25	1024.42	27.34	27.34 N	0.84 E	27.35	1.77	1.52	0.56	-28.24
	1050.00	2.45	14.68	25	1049.39	28.48	28.48 N	1.13 E	28.50	2.28	1.97	-1.96	3.08
	1075.00	2.35	25.34	25	1074.37	29.46	29.46 N	1.49 E	29.49	2.89	1.83	-0.40	42.64
	1100.00	2.64	20.29	25	1099.34	30.46	30.46 N	1.91 E	30.52	3.58	1.45	1.16	-20.20
	1125.00	2.40	12.13	25	1124.32	31.51	31.51 N	2.22 E	31.59	4.02	1.72	-0.96	-32.64
	1150.00	1.89	22.40	25	1149.30	32.41	32.41 N	2.48 E	32.50	4.38	2.55	-2.04	41.08
	1175.00	2.17	28.99	25	1174.28	33.20	33.20 N	2.87 E	33.32	4.94	1.46	1.12	26.36
	1200.00	2.45	24.84	25	1199.26	34.10	34.10 N	3.32 E	34.26	5.57	1.30	1.12	-16.60
	1225.00	2.46	19.83	25	1224.24	35.09	35.09 N	3.73 E	35.29	6.07	0.86	0.04	-20.04
	1250.00	2.49	14.01	25	1249.22	36.12	36.12 N	4.04 E	36.35	6.39	1.01	0.12	-23.28
	1275.00	2.34	15.99	25	1274.20	37.14	37.14 N	4.32 E	37.39	6.63	0.69	-0.60	7.92
	1300.00	2.15	14.11	25	1299.18	38.08	38.08 N	4.57 E	38.36	6.84	0.81	-0.76	-7.52
	1325.00	1.91	18.67	25	1324.16	38.93	38.93 N	4.82 E	39.23	7.06	1.16	-0.96	18.24
	1350.00	2.04	23.55	25	1349.15	39.74	39.74 N	5.13 E	40.07	7.36	0.85	0.52	19.52
	1375.00	2.03	25.55	25	1374.13	40.54	40.54 N	5.50 E	40.91	7.72	0.29	-0.04	8.00
	1400.00	2.02	26.94	25	1399.11	41.34	41.34 N	5.89 E	41.75	8.11	0.20	-0.04	5.56
	1425.00	2.14	24.89	25	1424.10	42.15	42.15 N	6.28 E	42.62	8.48	0.56	0.48	-8.20
	1450.00	2.08	23.75	25	1449.08	42.99	42.99 N	6.66 E	43.50	8.81	0.29	-0.24	-4.56
	1475.00	2.11	23.92	25	1474.06	43.83	43.83 N	7.03 E	44.39	9.12	0.12	0.12	0.68
	1500.00	2.00	24.54	25	1499.05	44.64	44.64 N	7.40 E	45.25	9.41	0.45	-0.44	2.48
	1525.00	2.02	24.61	25	1524.03	45.44	45.44 N	7.77 E	46.10	9.70	0.08	0.08	0.28
	1550.00	2.01	25.68	25	1549.02	46.24	46.24 N	8.14 E	46.95	9.98	0.16	-0.04	4.28



Company: EOG Resources
 Well: Williams No. 009
 Location: Eddy Co., New Mexico
 Rig: Pulling Unit

Job Number: 63934
 Grid Corr.: 0.00
 Lat: 32.720460
 Long: -104.332340
 Grid Ref:

Calculation Method: Minimum Curvature
 Proposed Azimuth:
 RKB - MSL in feet: Ground Level
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	1575.00	2.00	27.99	25	1574.00	47.02	47.02 N	8.53 E	47.79	10.29	0.33	-0.04	9.24
	1600.00	1.91	28.41	25	1598.99	47.77	47.77 N	8.94 E	48.60	10.60	0.36	-0.36	1.68
	1625.00	1.80	26.21	25	1623.97	48.49	48.49 N	9.31 E	49.37	10.87	0.52	-0.44	-8.80
	1650.00	1.92	27.16	25	1648.96	49.21	49.21 N	9.67 E	50.15	11.12	0.50	0.48	3.80
	1675.00	1.89	30.45	25	1673.95	49.94	49.94 N	10.07 E	50.95	11.40	0.45	-0.12	13.16
	1700.00	1.82	35.04	25	1698.93	50.62	50.62 N	10.51 E	51.70	11.73	0.66	-0.28	18.36
	1725.00	1.84	38.42	25	1723.92	51.26	51.26 N	10.99 E	52.42	12.10	0.44	0.08	13.52
	1750.00	1.86	41.12	25	1748.91	51.88	51.88 N	11.50 E	53.14	12.50	0.36	0.08	10.80
	1775.00	1.74	43.80	25	1773.90	52.46	52.46 N	12.03 E	53.82	12.92	0.59	-0.48	10.72
	1800.00	1.62	43.78	25	1798.89	52.99	52.99 N	12.54 E	54.45	13.31	0.48	-0.48	-0.08
	1825.00	1.61	36.72	25	1823.88	53.53	53.53 N	13.00 E	55.08	13.65	0.80	-0.04	-28.24
	1850.00	1.63	28.43	25	1848.87	54.12	54.12 N	13.37 E	55.75	13.88	0.94	0.08	-33.16
	1875.00	1.41	19.64	25	1873.86	54.72	54.72 N	13.65 E	56.40	14.00	1.28	-0.88	-35.16
	1900.00	1.18	19.01	25	1898.85	55.26	55.26 N	13.83 E	56.96	14.06	0.92	-0.92	-2.52
	1925.00	0.99	26.42	25	1923.85	55.69	55.69 N	14.01 E	57.43	14.12	0.94	-0.76	29.64
	1950.00	1.10	36.95	25	1948.84	56.08	56.08 N	14.25 E	57.86	14.26	0.88	0.44	42.12
	1975.00	1.26	39.65	25	1973.84	56.48	56.48 N	14.57 E	58.33	14.47	0.68	0.64	10.80
	2000.00	1.59	37.34	25	1998.83	56.97	56.97 N	14.96 E	58.90	14.71	1.34	1.32	-9.24
	2025.00	1.62	30.04	25	2023.82	57.55	57.55 N	15.35 E	59.56	14.93	0.83	0.12	-29.20
	2050.00	1.50	18.39	25	2048.81	58.17	58.17 N	15.63 E	60.23	15.04	1.35	-0.48	-46.60
	2075.00	1.47	15.57	25	2073.80	58.79	58.79 N	15.82 E	60.88	15.06	0.32	-0.12	-11.28
	2100.00	1.16	19.00	25	2098.79	59.33	59.33 N	15.99 E	61.45	15.08	1.28	-1.24	13.72
	2125.00	1.17	29.82	25	2123.79	59.79	59.79 N	16.19 E	61.95	15.15	0.88	0.04	43.28
	2150.00	1.37	29.28	25	2148.78	60.28	60.28 N	16.47 E	62.49	15.28	0.80	0.80	-2.16
	2175.00	1.45	27.31	25	2173.78	60.82	60.82 N	16.76 E	63.09	15.41	0.37	0.32	-7.88
	2200.00	1.49	21.40	25	2198.77	61.40	61.40 N	17.02 E	63.72	15.50	0.63	0.16	-23.64
	2225.00	1.42	9.49	25	2223.76	62.01	62.01 N	17.19 E	64.35	15.50	1.24	-0.28	-47.64
	2250.00	1.19	8.11	25	2248.75	62.57	62.57 N	17.28 E	64.91	15.44	0.93	-0.92	-5.52
	2275.00	1.07	14.39	25	2273.75	63.06	63.06 N	17.37 E	65.41	15.41	0.69	-0.48	25.12
	2300.00	1.11	23.19	25	2298.74	63.50	63.50 N	17.53 E	65.88	15.43	0.69	0.16	35.20
	2325.00	1.14	28.44	25	2323.74	63.95	63.95 N	17.74 E	66.36	15.51	0.43	0.12	21.00



Company: EOG Resources
 Well: Williams No. 009
 Location: Eddy Co., New Mexico
 Rig: Pulling Unit

Job Number: 63934
 Grid Corr.: 0.00
 Lat: 32.720460
 Long: -104.332340
 Grid Ref:

Calculation Method: Minimum Curvature
 Proposed Azimuth: _____
 RKB - MSL in feet: Ground Level
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclination (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	2350.00	1.37	30.08	25	2348.73	64.42	64.42 N	18.01 E	66.89	15.62	0.93	0.92	6.56
	2375.00	1.62	31.12	25	2373.72	64.98	64.98 N	18.34 E	67.52	15.76	1.01	1.00	4.16
	2400.00	1.61	22.84	25	2398.71	65.61	65.61 N	18.66 E	68.21	15.88	0.93	-0.04	-33.12
	2425.00	1.56	17.54	25	2423.70	66.26	66.26 N	18.90 E	68.90	15.92	0.62	-0.20	-21.20
	2450.00	1.55	18.48	25	2448.70	66.90	66.90 N	19.11 E	69.58	15.94	0.11	-0.04	3.76
	2475.00	1.24	20.96	25	2473.69	67.48	67.48 N	19.31 E	70.19	15.97	1.26	-1.24	9.92
	2500.00	1.31	13.24	25	2498.68	68.01	68.01 N	19.48 E	70.74	15.98	0.74	0.28	-30.88
	2525.00	1.09	19.37	25	2523.68	68.51	68.51 N	19.62 E	71.26	15.98	1.02	-0.88	24.52
	2550.00	1.07	34.30	25	2548.67	68.93	68.93 N	19.83 E	71.72	16.05	1.13	-0.08	59.72
	2575.00	1.06	35.43	25	2573.67	69.31	69.31 N	20.10 E	72.16	16.17	0.09	-0.04	4.52
	2600.00	0.90	28.14	25	2598.66	69.67	69.67 N	20.32 E	72.57	16.26	0.81	-0.64	-29.16
	2625.00	1.04	50.12	25	2623.66	69.99	69.99 N	20.59 E	72.95	16.39	1.58	0.56	87.92
	2650.00	1.15	40.82	25	2648.66	70.32	70.32 N	20.93 E	73.37	16.57	0.83	0.44	-37.20
	2675.00	1.12	31.77	25	2673.65	70.72	70.72 N	21.22 E	73.84	16.70	0.73	-0.12	-36.20
	2700.00	1.15	24.23	25	2698.65	71.16	71.16 N	21.45 E	74.32	16.78	0.61	0.12	-30.16
	2725.00	0.98	25.01	25	2723.64	71.58	71.58 N	21.65 E	74.78	16.82	0.68	-0.68	3.12
	2750.00	0.82	31.57	25	2748.64	71.93	71.93 N	21.83 E	75.17	16.88	0.76	-0.64	26.24
	2775.00	0.88	44.97	25	2773.64	72.22	72.22 N	22.06 E	75.51	16.99	0.83	0.24	53.60
	2800.00	1.14	46.00	25	2798.63	72.52	72.52 N	22.37 E	75.90	17.14	1.04	1.04	4.12
	2825.00	1.38	41.13	25	2823.63	72.92	72.92 N	22.75 E	76.39	17.33	1.05	0.96	-19.48
	2850.00	1.45	30.10	25	2848.62	73.42	73.42 N	23.11 E	76.97	17.47	1.12	0.28	-44.12
	2875.00	1.17	21.98	25	2873.61	73.93	73.93 N	23.36 E	77.54	17.54	1.34	-1.12	-32.48
	2900.00	1.12	13.49	25	2898.61	74.41	74.41 N	23.51 E	78.04	17.54	0.71	-0.20	-33.96
	2925.00	0.87	26.28	25	2923.60	74.82	74.82 N	23.65 E	78.47	17.55	1.33	-1.00	51.16
	2950.00	1.19	50.65	25	2948.60	75.15	75.15 N	23.94 E	78.87	17.67	2.14	1.28	97.48
	2975.00	1.03	55.29	25	2973.59	75.44	75.44 N	24.32 E	79.27	17.87	0.73	-0.64	18.56
	3000.00	1.19	56.04	25	2998.59	75.72	75.72 N	24.72 E	79.65	18.08	0.64	0.64	3.00
	3025.00	1.09	55.92	25	3023.58	75.99	75.99 N	25.14 E	80.04	18.30	0.40	-0.40	-0.48
	3050.00	1.01	51.29	25	3048.58	76.27	76.27 N	25.51 E	80.42	18.49	0.47	-0.32	-18.52
	3075.00	1.06	49.43	25	3073.58	76.55	76.55 N	25.85 E	80.80	18.66	0.24	0.20	-7.44
	3100.00	1.21	56.13	25	3098.57	76.85	76.85 N	26.25 E	81.21	18.86	0.80	0.60	26.80



Company: EOG Resources
 Well: Williams No. 009
 Location: Eddy Co., New Mexico
 Rig: Pulling Unit

Job Number: 63934
 Grid Corr.: 0.00
 Lat: 32.720460
 Long: -104.332340
 Grid Ref: _____

Calculation Method: Minimum Curvature
 Proposed Azimuth: _____
 RKB - MSL in feet: Ground Level
 Tie Into: Surface

Survey Tool Type	Survey Depth (ft)	Inclina- tion (deg)	Azimuth (deg)	Course Length (ft)	True Vertical Depth (ft)	Vertical Section (ft)	Coordinates		Closure		Dogleg Severity (d/100')	Build Rate (d/100')	Walk Rate (d/100')
							N/S (ft)	E/W (ft)	Distance (ft)	Angle (deg)			
	3125.00	1.14	53.20	25	3123.57	77.15	77.15 N	26.67 E	81.63	19.07	0.37	-0.28	-11.72
	3150.00	1.30	51.98	25	3148.56	77.47	77.47 N	27.09 E	82.07	19.27	0.65	0.64	-4.88
	3175.00	1.25	50.17	25	3173.55	77.82	77.82 N	27.52 E	82.54	19.48	0.26	-0.20	-7.24
	3200.00	1.24	51.23	25	3198.55	78.16	78.16 N	27.94 E	83.01	19.67	0.10	-0.04	4.24
	3225.00	1.38	58.61	25	3223.54	78.49	78.49 N	28.41 E	83.47	19.90	0.88	0.56	29.52

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section.


Operator BLANCO ENGINEERING INC.			Lease Williams &		Well No. 9
Unit Letter G	Section 25	Township 18 South	Range 26 East	County Eddy	
Actual Footage Location of Well: 1650 feet from the East line and 1980 feet from the North line					
Ground Level Elev. 3277.	Producing Formation Glorietta Yeso		Pool Atoka Glorietta Yeso		Dedicated Acreage: 40 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

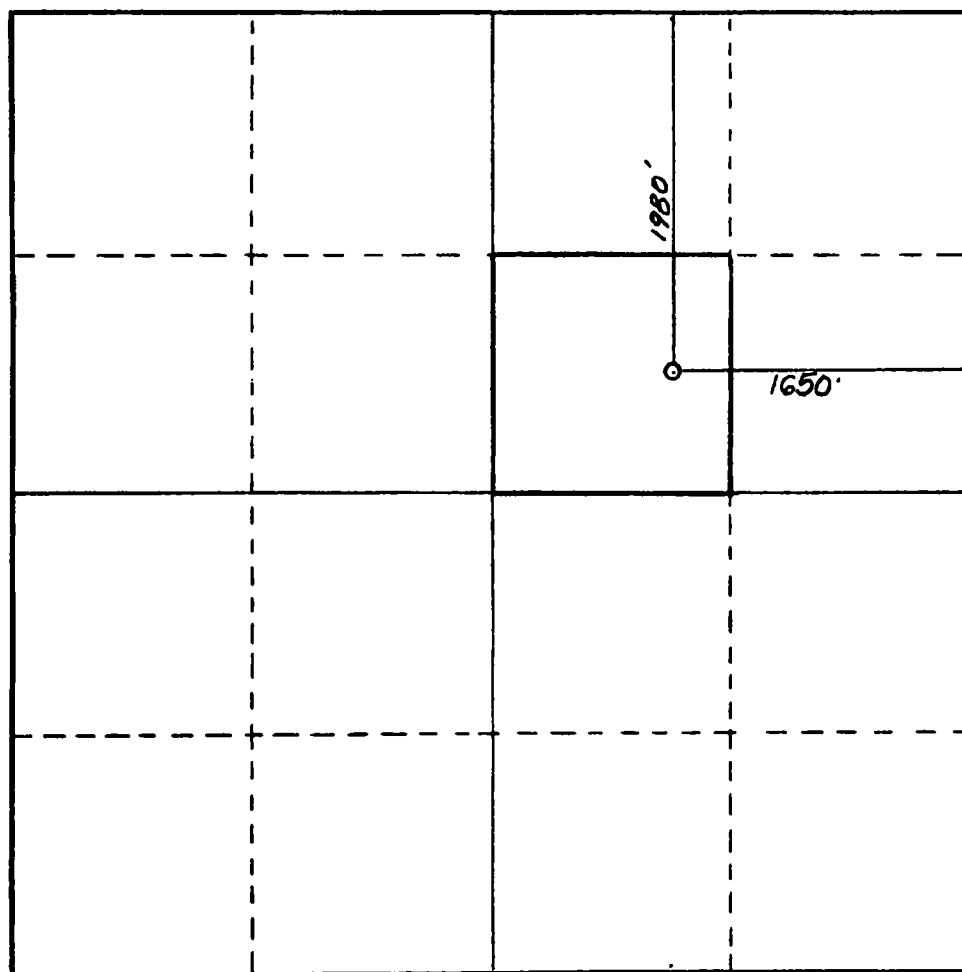

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Paul White
Name

President


Position

Blanco Engineering, Inc.

Company

October 10, 1984

Date

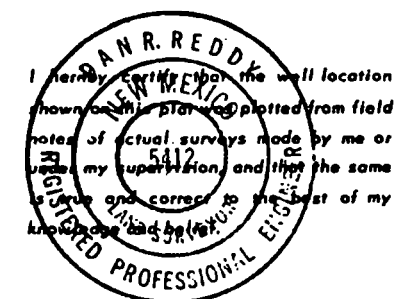

Date Surveyed

October 3, 1984

Registered Professional Engineer
and/or Land Surveyor

Dan R. Reddy

Certificate No.

NM PE&LS No. 5412

