

Submit 1 Copy To Appropriate District Office  
 District I - (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II - (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III - (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV - (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised July 18, 2013

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

WELL API NO. 30-015- 40118
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. X0-0647-0408
7. Lease Name or Unit Agreement Name WASHINGTON 33 STATE [309175]
8. Well Number #63
9. OGRID Number 873
10. Pool name or Wildcat [96830] ARTESIA; GLORIETA-YESO (O)

**SUNDRY NOTICES AND REPORTS ON WELLS**  
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well  Gas Well  Other

2. Name of Operator  
Apache Corporation

3. Address of Operator  
303 Veterans Airpark Lane, Suite 1000 Midland, TX 79705

4. Well Location  
 Unit Letter N : 330 feet from the SOUTH line and 2275 feet from the WEST line  
 Section 33 Township 17S Range 28E NMPM County EDDY

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3673' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<b>NOTICE OF INTENTION TO:</b> PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: DO CIBP & ACIDIZE <input checked="" type="checkbox"/>		<b>SUBSEQUENT REPORT OF:</b> REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	---	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Apache is requesting permission to drill out the CIBP and 35' of cement & acidize the Glorieta/Paddock/Blincy

PROCEDURES AND WELLBORE DIAGRAMS ENCLOSED

RECEIVED

AUG 20 2019

DISTRICT I-ARTESIA O.C.D.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE alicia fulton TITLE Reg Analyst DATE 8/15/2019

Type or print name Alicia E-mail address: alicia.fulton@apachecorp.com PHONE: (432) 818-1088

**For State Use Only**

APPROVED BY: Raymond D. Juday TITLE Geologist DATE 8-21-19  
 Conditions of Approval (if any):



AFE: 11-19-0861

**Well name: Washington 33 State #63**

API Number: 30-015-40118  
County, State: Eddy, NM  
Legals: SEC-33 TWP-17S RGE-28E

Depths: 5100 MD 4485 PBTB  
Producing Interval: 3603'-4214' (Glorietta-Yeso)

CSG	OD	Wt/Ft	Cap (bbl/ft)	Top	Set @
Surface	8.625"	24#	0.0609	0'	505'
Production	5.500"	17#	0.0232	0'	5100'

Engineer: Evan Roback 432-818-1186 (o) [evan.roback@apachecorp.com](mailto:evan.roback@apachecorp.com)  
Assistant Foreman: David Pedroza 575-910-3283 (c) [david.pedroza@apachecorp.com](mailto:david.pedroza@apachecorp.com)  
Production Foreman: Javier Berdoza 575-441-5755 (c) [javier.berdoza@apachecorp.com](mailto:javier.berdoza@apachecorp.com)

**What's New:**

- 1) *Drill out cast iron bridge plug w/ 35' cmt @ 4520'*
- 2) *Acidize Blinebry perforations (4550'-4950') w/ 9,000 gallons of 15% HCl and 6,000 lbs salt.*
- 3) *Acidize Glorietta/Paddock perforations (3603'-4214') w/ 12,000 gallons of 15% HCl and 9,000 lbs salt.*
- 4) *Lower SN to 4980'.*
- 5) *Install 1-1/2" rod pump w/ 2-stage, HVR, brass Ni-carb bbl and brass pull tube, alternate (California) ball and seats.*
- 6) *Inspect and replace rods with customer owned as necessary.*
- 7) *Inspect and replace tubing with customer owned as necessary.*

**WELL HISTORY**

The Washington 33 State #62 is a vertical well completed in the Blinebry with 190 klbs of 16/30 sand and 151,000 gallons of water in 8/2012. Due to offset wells seeing higher productivity from the Glorietta & Paddock, the Blinebry was isolated via CIBP in 1/2013 after approximately 4 months of production. The Glorietta/Paddock were then fracked with 250 klbs sand and 189,000 gallons of water. Production increased from 5 BOPD in the Blinebry to 100 BOPD in the Glorietta/Paddock.

This well was pulled three times between 2013 and 2015 for pump failures and HIT, with the primary source being sand infiltration. It has not been pulled since 2015.

**WORKOVER SUMMARY:**

The objective of this AFE is to POOH w/ rods and pump. TOOH w/ tubing while scanning. TIH w/ tubing and bit to DO CIBP and 35' cmt, continue CO to TD. Acidize Blinebry & Glorietta/Paddock w/ 21,000 gal 15% HCl with 15,000 lbs salt. TIH w/ tubing while hydro-testing, RIH w/ pump and rods. RTP.

8/14/2019



**PROCEDURE:**

1. MIRU workover rig.
2. POOH w/ rods and pump. Report preliminary findings of the pump and rods (paraffin, scale, sand, rod wear, etc.).
3. Pump produced water as necessary to ND pumping tee. NU 5k double BOP (2-7/8" rams on top and blinds on bottom) and function test. Release TAC (if not set, please note in WellView).
4. TOOH w/ tubing and BHA while scanning.
5. MIRU foam air unit. TIH w/ tubing & 4-3/4" bit to PBD. DO 35' of cement and CIBP. Continue CO to TD @ 5100'. TOOH w/ bit and tubing.
6. TIH w/ RBP, packer, and tubing while hydro-testing. Set RBP at +/- 5000'. Pull up hole and set packer at +/- 4450', test backside.
7. MIRU acid crew. Verify acid concentration is 15% +/- 1% (titrate). If possible request additives such as inhibitors, surfactants, and iron sequesterant are mixed on location to verify they are present. Verify iron concentration is less than 100 ppm in acid. Circulate tank for 15 minutes to mix additives into solution.
8. Acidize the Blinebry. Test lines to 4,500 psi (MSTP = 3500 psi), bleed off. Set pressure safety valve at 4,500. Establish rate at 3-5bbl/min with brine water. Acidize with 9,000 gallons of NEFE 15% HCl acid with 6,000 lbs rock salt in six stages as follows. We may adjust salt volumes based on pressure responses.

	STAGE						
PARAMETERS	1	2	3	4	5	6	Total
Rate (bbl/min)	4.5	4.5	4.5	4.5	4.5	4.5	
Max Surface Pressure (psi)	3,500	3,500	3,500	3,500	3,500	3,500	
<b>FLUID/STAGE</b>							
Acid - 15% HCl (gal)	1,500	1,500	1,500	1,500	1,500	1,500	9,000
Salt / Concentration (#, #/bbl)**	500	500	500	1,000	1,500	2,000	6,000
Brine Spacer (bbls)	51	51	51	51	51	51	253
Total Volume (bbls)	86	86	86	86	86	86	431
Total Time (min)	19	19	19	19	19	19	96

9. Release packer, TIH to release RBP. Come up hole and set RPB at +/- 4260'. Pull up hole and set packer at +/- 3500', test backside.
10. Acidize the Glorietta/Paddock. Test lines to 4,500 psi (MSTP = 3500 psi), bleed off. Set pressure safety valve at 4,500. Establish rate at 3-5bbl/min with brine water. Acidize with 12,000 gallons of NEFE 15% HCl acid with 9,000 lbs rock salt in six stages as follows. We may adjust salt volumes based on pressure responses.



AFE: 11-19-0861

PARAMETERS	STAGE						Total
	1	2	3	4	5	6	
Rate (bbl/min)	4.5	4.5	4.5	4.5	4.5	4.5	
Max Surface Pressure (psi)	3,500	3,500	3,500	3,500	3,500	3,500	
<b>FLUID/STAGE</b>							
Acid - 15% HCl (gal)	2,000	2,000	2,000	2,000	2,000	2,000	12,000
Salt / Concentration (#, #/bbl)**	500	1,000	1,500	1,500	2,000	2,500	9,000
Brine Spacer (bbls)	49	49	49	49	49	49	244
Total Volume (bbls)	96	96	96	96	96	96	482
Total Time (min)	21	21	21	21	21	21	107

11. Release packer, TIH to release RPB, TOOH w/ tubing, packer, and RBP.

12. TIH w/ production BHA and tubing while hydro-testing. Lower SN to 4980'.

13. RIH w/ pump and rods.

14. RTP.

**Apache Corporation**


CURRENT

Work Objective \_\_\_\_\_ DO CIBP & Actlize \_\_\_\_\_

Region Office Permian / Midland  
 District /Field Office \_\_\_\_\_  
 AFE Type W District

Start Date	TBD	End Date	TBD
Lease	Washington 33 State	KB/GL	3680/3669'
Well Name	Washington 33 St #63	Well No.	#63
Field	Empire (BP)	TD @	5100'
County	Eddy	PBTD @	4485'
State	New Mexico	ETD @	
AFE #	11-19-0861	API #	30-015-40118
Gross AFE	113,000	Spud Date	6/20/2012
Apache WI	100.000000%	Comp. Date	8/25/2012

Description	O.D.	Grade	Weight	Depth	Cmt Sx	TOC
Surface Csg	8 5/8"	J-55	24#	505'	350 sx	Circ 80 sx to surf
Inter Csg						
Prod Csg	5 1/2"	J-55	17#	5100'	800 sx	Circ 250 sx to surf
Casing Liner						

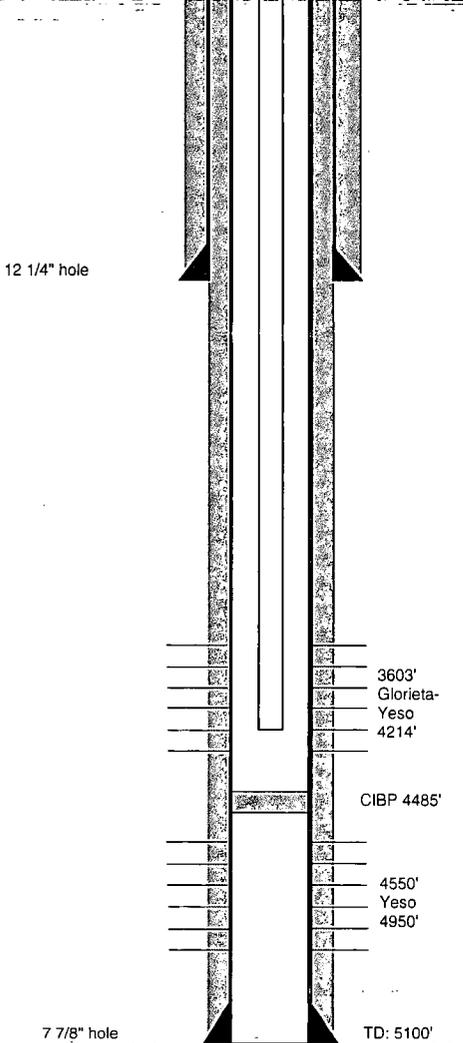

Date	Zone	Actual Perforations	JSPF	Total Perfs
8/25/2012	Yeso	4550, 60, 70, 80, 90, 4600, 10, 20, 30, 40, 50, 60, 70, 80, 4800, 10, 20, 30, 40, 50, 60, 70, 80, 90, 4900, 10, 20, 30, 40, 50	1	29
1/18/2013	Glorieta-Yeso	3603, 25, 54, 86, 3719, 31, 58, 64, 86, 3810, 35, 48, 67, 87, 98, 3922, 40, 55, 70, 4000, 13, 30, 53, 70, 80, 4118, 38, 59, 93, 4214	1	30

Date	Zone	Stimulation / Producing Interval	Amount
8/21/2012	Yeso	Stimulate 4550-4950' w/ 3500 gal 15% HCL: frac w/ 190 klbs 16/30 WHT & 3600 bbls water	
1/18/2013	Glorieta-Yeso	Stimulate 3603-4214' w/ 3685 gal 15% HCL: frac w/ 250 klbs 16/30 WHT & 4500 bbls water	

Well History / Failure	
1/13	Ran CIBP to 4520' w/ 35' of CMT, perf and stim Glorieta/Paddock
11/13	Pump failure - found sand
6/14	Pump failure
9/15	HIT - bad makeup connection, sand issues

Apache Representative \_\_\_\_\_ Contract Rig/Number \_\_\_\_\_  
 Apache Engineer Evan Roback Operator \_\_\_\_\_

