UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGENERIA O.C.D. APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED OMB No. 1004-0137

	Expires:	January	<i>5</i> 1,	20
3SP	Serial No			

6. If Indian, Allotee or Tribe Name

NMNM018038

la. Type of work:	EENTER				7. If Unit or CA Agr	eement,	Name and No.
1b. Type of Well: Oil Well Gas Well O	ther				8. Lease Name and V	Vell No.	
1c. Type of Completion: Hydraulic Fracturing Si	ingle Zon	e 「	Multiple Zone		GOONCH FED CO		
		L.			00011		
		-			^{222H} 3265	17	
Name of Operator NOVO OIL AND GAS NORTHERN DELAWARE LLC					9. API Well No.	15-6	IL EIG
3a. Address	3h Pho	ne N	o. (include area code	2)	10. Field and Pool, o		
1001 West Wilshire Boulevard Suite 206 Oklahoma City O	1		•	.,	BILBREY BASIN B		•
4. Location of Well (Report location clearly and in accordance v	with any S	state .	requirements.*)		11, Sec., T. R. M. or	Blk. and	Survey or Area
At surface SWSW / 1100 FSL / 1180 FWL / LAT 32.33	301612 /	LON	G -104.0971411		SEC 4 / T23S / R28	BE / NM	Р
At proposed prod. zone LOT 4 / 130 FNL / 1122 FWL / L	AT 32.34	4156	668 / LONG -104.09	968497			
14. Distance in miles and direction from nearest town or post off 3 miles	ice*				12. County or Parish EDDY	1	13. State NM
15. Distance from proposed* 1041 feet	16. No	of ac	res in lease	17. Spacii	ng Unit dedicated to th	nis well	
location to nearest property or lease line, ft. (Also to nearest drig, unit line, if any)	280.21			320			
18. Distance from proposed location*	19. Pro	posec	d Depth	20. BLM/	BIA Bond No. in file		
to nearest well, drilling, completed, 20 feet applied for, on this lease, ft.	9729 fe	et /	14727 feet	FED: NM	1B001536		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)			mate date work will	start*	23. Estimated durati	on	
3014 feet	11/01/2				90 days		
	24. A	ttac	hments				
The following, completed in accordance with the requirements o (as applicable)	f Onshore	Oil	and Gas Order No. 1	, and the I	lydraulic Fracturing r	ıle per 4	3 CFR 3162.3-3
Well plat certified by a registered surveyor. A Drilling Plan.			4. Bond to cover th	e operation	s unless covered by ar	existing	bond on file (see
3. A Surface Use Plan (if the location is on National Forest Syste	m Lands.	the	5. Operator certific	ation.			
SUPO must be filed with the appropriate Forest Service Office					mation and/or plans as	may be i	requested by the
25. Signature	1		(Printed/Typed)	00.0400		Date	2040
(Electronic Submission)	Bı	rian \	Wood / Ph: (505)46	56-8120		08/03/2	2019
Title President							
Approved by (Signature)	TN	lame	(Printed/Typed)			Date	
(Electronic Submission)			opher Walls / Ph: (575)234-2	2234	11/20/2	2019
Title	C	ffice	*	-		l	
Petroleum Engineer			SBAD				
Application approval does not warrant or certify that the applican applicant to conduct operations thereon.	nt holds le	egal (or equitable title to the	nose rights	in the subject lease w	hich wou	ıld entitle the
Conditions of approval, if any, are attached.							'
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, r	make it a	crime	for any person know	wingly and	willfully to make to a	ny depa	rtment or agency



of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Ruf 12-23-19

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the wen, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionany drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

1TEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service wen or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record win be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM conects this information to anow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Conection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SWSW / 1100 FSL / 1180 FWL / TWSP: 23S / RANGE: 28E / SECTION: 4 / LAT: 32.3301612 / LONG: -104.0971411 (TVD: 0 feet, MD: 0 feet)
PPP: SWNW / 2640 FSL / 1038 FWL / TWSP: 23S / RANGE: 28E / SECTION: 4 / LAT: 32.33464 / LONG: -104.09713 (TVD: 9279 feet, MD: 12207 feet)
PPP: SWSW / 103 FSL / 1087 FWL / TWSP: 23S / RANGE: 28E / SECTION: 4 / LAT: 32.327652 / LONG: -104.097107 (TVD: 9340 feet, MD: 9437 feet)
BHL: LOT 4 / 130 FNL / 1122 FWL / TWSP: 23S / RANGE: 28E / SECTION: 4 / LAT: 32.3415668 / LONG: -104.0968497 (TVD: 9729 feet, MD: 14727 feet)

BLM Point of Contact

Name:	
Title:	
Phone:	
Email:	

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

(Form 3160-3, page 4)

Approval Date: 11/20/2019

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: NOVO OIL AND GAS LEASE NO.: NMNM018038

LOCATION: Section 4, T.23 S., R.28 E., NMPM

COUNTY: | Eddy County, New Mexico

WELL NAME & NO.: Goonch

Goonch FED COM 04 222H

SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE 1100'/S & 1180'/W 130'/N & 1122'/W



H2S	• Yes	ONo	
Potash	None Non	© Secretary	OR-111-P
Cave/Karst Potential	OLow		O High
Cave/Karst Potential	© Critical		
Variance	ONone	© Flex Hose	C Other
Wellhead	• Conventional	Multibowl	O Both
Other	☐4 String Area	☐Capitan Reef	WIPP
Other	Fluid Filled	☐ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☑ COM	U nit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **North East Loving** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

- 1. The 13-3/8 inch surface casing shall be set at approximately 214 feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8** hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9 5/8 inch intermediate casing shall be set at approximately 6,500 feet. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
- 3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. Excess cement calculates to negative 10%, additional cement might be required.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

Page 2 of 7

e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

JJP10162019

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
 - Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822
 - ✓ Lea CountyCall the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)393-3612
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

- a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive

strength of 500 psi at the shoe, 2) until cement has been in place at least <u>8 hours</u>. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.

- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

Page 6 of 7

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



NAME: Brian Wood

Operator Certification Data Report

Signed on: 08/03/2019

11/21/2019

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

		=
Title: President		
Street Address:		
City:	State:	Zip:
Phone: (505)466-8120		
Email address: afmss@permitsv	vest.com	
Field Representativ	e .	
Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

pplication Data Repor

APD ID: 10400045326

Submission Date: 08/03/2019

Highlighted data reflects the most

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

recent changes

Well Name: GOONCH FED COM 04

Well Number: 222H

Show Final Text

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

APD ID:

10400045326

Tie to previous NOS?

Submission Date: 08/03/2019

BLM Office: CARLSBAD

User: Brian Wood

Title: President

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM018038

Lease Acres: 280.21

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? N

Permitting Agent? YES

APD Operator: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Operator letter of designation:

Operator Info

Operator Organization Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Operator Address: 1001 West Wilshire Boulevard Suite 206

Operator PO Box:

Zip: 73116

Operator City: Oklahoma City

State: OK

Operator Phone: (405)404-0414

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: GOONCH FED COM 04

Well Number: 222H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: BILBREY BASIN BONE SPRING, SOUTH

Pool Name:

ineral recources? LISEARLE WATER OIL

Well Name: GOONCH FED COM 04

Well Number: 222H

Is the proposed well in an area containing other mineral resources? USEABLE WATER, OIL

Is the proposed well in a Helium production area? N

Use Existing Well Pad? N

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 131H (Pad G)

Well Class: HORIZONTAL

Goonch Fed Com 04
Number of Legs: 1

Well Work Type: Drill

Well Type: CONVENTIONAL GAS WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 3 Miles

Distance to nearest well: 20 FT

Distance to lease line: 1041 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat:

Goonch_04_222H_Plat_GasCap_Plan_20190803122734.pdf

Well work start Date: 11/01/2019

Duration: 90 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 12797 Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	αντ	Will this well produce
SHL	110	FSL	118	FWL	23S	28E	4	Aliquot	32.33016	-	EDD	NEW	NEW	F	FEE	301	0	0	Υ
Leg	0		0					sws	12	104.0971	Υ	MEXI	ļ			4			
#1						ļ		W		411		СО	CO						
KOP	70	FSL	109	FWL	238	28E	4	Aliquot	32.32756	-	EDD	NEW	NEW	F	FEE	-	927	916	Υ
Leg	1		8					sws	5	104.0970	Υ	MEXI				615	3	9	
#1								W		98		СО	co			5			
PPP	103	FSL	108	FWL	23S	28E	4	Aliquot	32.32765	_	EDD	NEW	SALT	F	FEE	_	943	934	Υ
Lea			7					SMS	2	104.0971	Υ	MEXI	LAKE			632	7	0	

Well Name: GOONCH FED COM 04

Well Number: 222H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	dVT	Will this well produce
PPP	264	FSL	103	FWL	23S	28E	4	Aliquot	32.33464	-	EDD	NEW	NEW	F	NMNM	-	122	927	Υ
Leg	0		8					SWN		104.0971	Υ	MEXI	MEXI		018038	626	07	9	
#1-2								W		3		CO	CO			5			
EXIT	130	FNL	112	FWL	23S	28E	4	Lot	32.34156	-	EDD	NEW	NEW	F	NMNM	_	147	972	Υ
Leg			2					4	68	104.0968	Υ	MEXI	MEXI		032636	671	27	9	
#1										497		co	CO			5			
BHL	130	FNL	112	FWL	23S	28E	4	Lot	32.34156	-	EDD	NEW	NEW	F	NMNM	_	147	972	Υ
Leg			2					4	68	104.0968	l	MEXI	l		032636	671	27	9	
#1										497		СО	со			5			



U.S. Department of the interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

11/21/2019

APD ID: 10400045326 **Submission Date:** 08/03/2019

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: GOONCH FED COM 04 Well Number: 222H

Well Type: CONVENTIONAL GAS WELL Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Section 1 - Geologic Formations

ormation			True Vertical	[FS] [#604-1239] - 43-3 (A)			Producing
1 ID 1	Formation Name	Elevation 3014	Depth 0	Depth:	Lithologies OTHER: None	Mineral Resources USEABLE WATER	Formation
						nativitalisis jaaluuvi nantuuttuutiis muutit	
2	RUSTLER	2914	100	100	ANHYDRITE	NONE	i N
3	CASTILE	2044	970	970	GYPSUM	NONE	
4	L'AMAR	541	2473	2476	LIMESTONE	NONE	
5	BELL CANYON	475	2539	2542	SANDSTONE	NATURAL GAS, OIL	N. T.
6	CHERRY CANYON	-600	3614	3641	SANDSTONE	NATURAL GAS,OIL	
7	BRUSHY CANYON	-1613	4627	4676	SANDSTONE	NATURAL GAS OIL	2
8	BONE SPRING	-3056	6070	6152 1 4 4 1 4 1 4 1 4 1 4 1 4 1 4 1 4 1 4 1	LIMESTONE	NATURAL GAS, OIL	N
9	AVALON SAND	-3564	6578	6671	OTHER Shale		
10	BONE SPRING 1ST	-4023	7037	7140	SANDSTONE	NATURAL GAS OIL	N N
11	BONE SPRING 2ND	-4236 	7250	7354	OTHER Carbonate	NATURAL GAS, OIL	N
12	BONE SPRING 2ND	-4771	7785	7889	SANDSTONE	NATURAL GAS, OIL	N
13	BONE SPRING 3RD	5068	8082	8186	OTHER :: Carbonate	NATURAL GAS,OIL	N
14	BONE SPRING 3RD	-6002	9016	9120	SANDSTONE	NATURAL GAS, OIL	N
15	WOLFCAMP.	-6326	9340	9437			N.
16	WOLFCAMP	6482	9496	9633	OTHER: A Carbonate	NATURAL GAS OIL	N. a
17	WOLFCAMP	-6690	9704	13300	OTHER B Carbonate	NATURAL GAS OIL	

Well Name: GOONCH FED COM 04 Well Number: 222H

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 12000

Equipment: A 13.625 5,000-psi BOP system will be installed on a multi-bowl (speed head) wellhead with a 13.625 flanged casing spool. Top flange of casing spool will be set in a cellar below ground level. BOP system will consist of a single pipe ram on the bottom, mud cross, double pipe ram with blind rams on bottom and pipe rams on top, and annular preventer. Blowout preventer will be installed on top of the 13.375 surface casing and will remain installed to TD of the well.

Requesting Variance? NO

Variance request:

Testing Procedure: BOP system will be isolated with a test plug and tested by an independent tester to 250-psi low and 5000-psi high for 10 minutes. Variance is requested to use a co-flex hose between the BOP system and choke manifold. A typical co-flex pressure test certificate is attached. An equipment specific co-flex pressure test certificate will be on site when testing the BOP. All casing strings will be tested in accordance with Onshore Order 2 III.B.1.h.

Choke Diagram Attachment:

Goonch_04_222H_Choke_Revised_20190930122028.pdf

BOP Diagram Attachment:

Goonch_04_222H_BOP_20190803125028.pdf

Section 3 - Casing.

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	594	0	594	3014	2420	594	J-55	54.5	BUTT	1.12 5	1.12 5	DRY	1.6	DRY	1.6
2	SURFACE	12.2 5	9.625	NEW	API	N	0	8900	0	8796	3014	-5782	8900	HCL -80	43.5	витт	1.12 5	1.12 5	DRY	1.6	DRY	1.6
1	PRODUCTI ON	8.5	5.5	NEW	API	N	0	14727	0	9729	3014	-6715	14727	P- 110			I	1.12 5	DRY	1.6	DRY	1.6

Casing Attachments

perator Name: NOVO OIL A	AND GAS NORTHER	N DELAWARE LLC		
lell Name: GOONCH FED C	COM 04	Well Number: 2	222H	
asing Attachments				
Casing ID: 1	String Type: SURFA	ACE		•
Inspection Document:				
Spec Document:				
Tapered String Spec:				
Casing Design Assumpt	ions and Worksheet	(s):		
Goonch_04_222H_0	Casing_Design_Assur	mptions_20190803125135.	pdf	
Casing ID: 2	String Type: SURFA	ACE		
Inspection Document:				
Spec Document:				
Tapered String Spec:				
Casing Design Assumpt	ions and Worksheet	(s):		
Goonch_04_222H_0	Casing_Design_Assur	mptions_20190803125232.	.pdf	
Casing ID: 3	String Type:PRODU	JCTION		
Inspection Document:				
Spec Document:	•			
.*				
Tapered String Spec:			•	
Cooing Design Assured	iono and Martraha-4			
Casing Design Assumpt				
Goonch_04_222H_0	Casing_Design_Assu	mptions_20190803125337.	.pdf	
5.5in_TMK_Casing_	Spec_201909301220	048.pdf		

Well Name: GOONCH FED COM 04 Well Number: 222H

String Type	Lead/Tail	Stage Tool Depth	Тор МD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		*0	0	(a) (b) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	0	0	0	- 0	None	None
SURFACE	Tail		0:	594	509	1.62	13.8	824	100	Class C	gel + accelerator + LCM
PRODUCTION	Lead		0	Ö	0	0	0			None	None
PRODUCTION	Tail		8400	1472 7	920	1.89	13	1738		Class H	fluid loss + retarder + LCM
SURFACE	Lead	4000	0	4000	542	2.27	11.9	1235	20	Class C or H	fluid loss + retarder + LCM
SURFACE	Tail		4000	8900	200	1.34	14.8	268	20	Class C or H	fluid loss:+ retarder + LCM
SURFACE	Lead	4000	.0	4000	690	2.27	11.9	1573	20 =	Class C or H	fluid loss + retarder + LCM
SURFACE	Tail		4000	8900	200	1.34	14.8	268	20	Class C or H	fluid loss + retarder + LCM

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: All necessary mud products (barite, bentonite, LCM) to control weight and fluid loss will be on site at all times. Mud program may change due to hole conditions.

Describe the mud monitoring system utilized: An electronic PVT mud system will monitor flow rate, pump pressure, stroke rate, and volume.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	НН	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	594	OTHER : Fresh	8.3	8.3			1				·

Well Name: GOONCH FED COM 04 Well Number: 222H

Top Depth Bottom Depth B900 1472		ed A Wnd THER : Brine Diesel Emulsion	ω Μin Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	Hd	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
8900	1472 7	OIL-BASED MUD	8.8	12.5							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

A 2-person mud logging program will be used from 3000 to TD.

GR log will be acquired by MWD tools from the intermediate casing to TD.

List of open and cased hole logs run in the well:

GAMMA RAY LOG,

Coring operation description for the well:

No core or drill stem test is planned.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5177

Anticipated Surface Pressure: 3036

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Goonch_04_222H_H2S_Plan_20190803130201.pdf

Well Name: GOONCH FED COM 04 Well Number: 222H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Goonch_04_222H_Horizontal Drill Plan 20190803130220.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:

Goonch_04_222H_Speedhead_Specs_20190803130332.pdf Goonch_04_222H_Anti_Collision_Report_20190803130347.pdf Goonch_04_222H_Drill_Plan_Revised_20190930122111.pdf Goonch_04_222H_CoFlex_Certs_Revised_20190930122126.pdf

Other Variance attachment:

Goonch_04_222H_Casing_Variance_Request_20190803130236.pdf Goonch_04_222H_Alternative_Casing_Spec_Request_20190930122138.pdf



NOVO OIL & GAS, LLC

Date

7/15/2019


1001 West Wilshire Boulevard, Suite 206 Oklahoma City, Oklahoma 73116

Page No.

1 of 1

5M CHOKE MANIFOLD SCHEMATIC

	The Control of the Co									
ITEM	SIZE	PRESSURE	DESCRIPTION							
erain aus		diring a second of								
North Control of the Control of		5								
			and A							
			1 - Constitution							
-24.1	male was a fi	; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ;								
	man p. mp	L' maria de la composition della composition del								

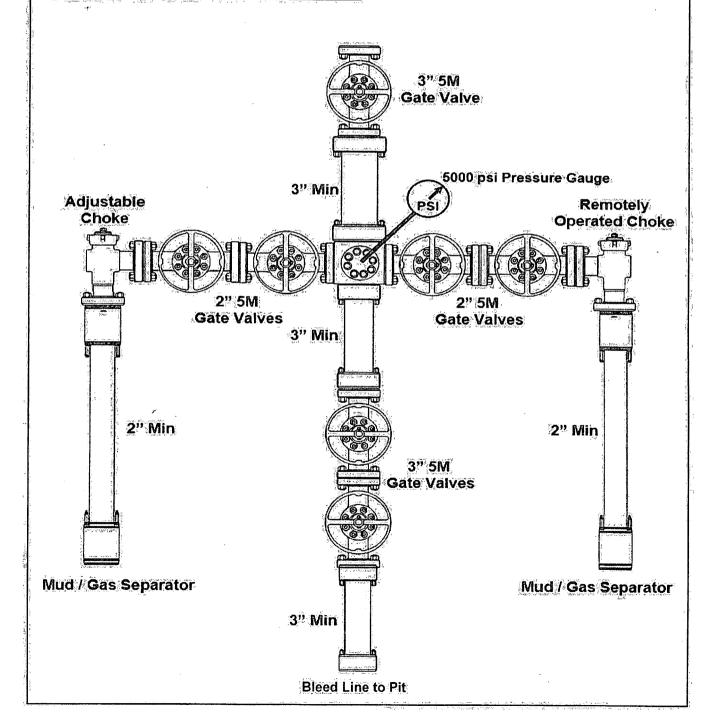



NOVO OIL & GAS, LLC


1001 West Wilshire Boulevard, Suite 206 Oklahoma City, Oklahoma 73116 Date

2/21/2019

Page No. 1 of 1

5M BLOWOUT PREVENTER SCHEMATIC

ITEM	SIZE	PRESSURE	DESCRIPTION
A.	13-5/8"	1,500 psi 👔	Rotating Head + Valve
В.	13-5/8"	5,000 psi	Annular Preventer
C	.13-5/8"	5,000 psi	Pipe Rams
D	13-5/8"	5,000 psi	Blind Rams
É	13-5/8"	5,000 psi	Mud Cross
F	13-5/8"	5,000 psi	Pipe Rams

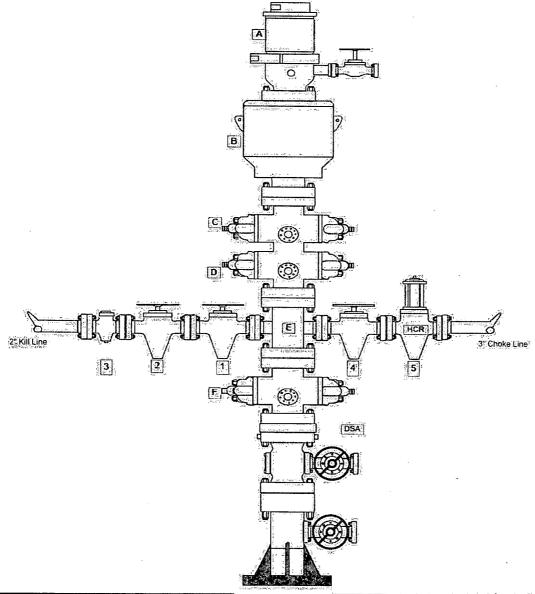

ITEM	SIZE	PRESSURE	DESCRIPTION
1	;2 ^{;1}	5,000 psi	Gate Valve
₈ 2	2°	5,000 psi	Gate Valve
3	:2"	5,000 psi	Check Valve
	- appearen	Service of the servic	ľ

L			CHOKE LINE	
	ITEM	SIZE	PRESSURE	DESCRIPTION:
	4	13"	(5,000 psi	Gaté Valve
Г	5	37	5,000 psi	HCR Valve
				S. Charges
		,		
	The second second	rest even a series q		And the second of

Goonch Fed Com 04 222H 3-string Casing Design Assumptions

Surface Casing

Collapse:

 $DF_c = 1.125$

a. Full internal Evacuation: Collapse force is equal to mud gradient (0.433 psi/ft) in which the casing will be run and internal evacuation of casing.

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.718 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_B = 1.125$

a: Casing Pressure Test: According to BLM Onshore Order No. 2 with 0.22 psi/ft or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

Tensile: $DF_T = 1.60$

a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8727 in water (8.33 ppg).

Intermediate Casing

Collapse:

 $DF_C = 1.125$

a. Full Internal Evacuation: Collapse force is equal to mud gradient (0.531 psi/ft) in which the casing will be run and internal evacuation of casing:

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.626 psi/ft) in which the casing will be run and internal force equivalent to the displacement of fluid gradient.

Burst: DF₈ = 1.125

a. Casing Pressure Test: According to BLM Onshore Order No. 2 with 0:22 psi/ft or 1500 psi, whichever is greater but to exceed 70% of the minimum internal yield.

b: Gas Kick: Internal burst load of a 50 bbl gas kick at the casing with drill pipe in the hole. External force will be 10.2 ppg brine water gradient (0:531 psi/ft) and internal force will be with 10.0 ppg brine water gradient (0:521 psi/ft) with gas kick.

Tensile: $DF_T = 1.60$

 Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8441 in brine water (10.2 ppg).

Production Casing

Collapse:

 $DF_c = 1.125$

Full Internal Evacuation: Collapse force is equal to mud gradient (0.531, psi/ft) in which the casing will be run and internal evacuation of casing.

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.688 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_B = 1.125$

a. Pressure Test: Pressure test will be to 80% of Internal Yield Pressure of casing intended for fracture stimulation.

Tensile: $DF_T = 1.60$

a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8472 in oil-based mud (10.0 ppg).

Goonch Fed Com 04 222H 3-string Casing Design Assumptions

Surface Casing

Collapse: DF_C = 1.125

a. Full internal Evacuation: Collapse force is equal to mud gradient (0.433 psi/ft) in which the casing will be run and internal evacuation of casing.

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.718 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_B = 1.125$

a. Casing Pressure Test: According to BLM Onshore Order No. 2 with 0.22 psi/ft or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

Tensile: $DF_T = 1.60$

a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8727 in water (8.33 ppg).

Intermediate Casing

Collapse:

 $DF_{C} = 1.125$

a. Full Internal Evacuation: Collapse force is equal to mud gradient (0.531 psi/ft) in which the casing will be run and internal evacuation of casing.

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0:626 psi/ft) in which the casing will be run and internal force equivalent to the displacement of fluid gradient.

Burst: $DF_B = 1.125$

a. Casing Pressure Test: According to BLM Onshore Order No. 2 with 0.22 psi/ft or 1500 psi, whichever is greater but to exceed 70% of the minimum internal yield.

b. Gas Kick Internal burst load of a 50 bbl gas kick at the casing with drill pipe in the hole. External force will be 10:2 ppg brine water gradient (0.531 psi/ft) and internal force will be with 10.0 ppg brine water gradient (0.521 psi/ft) with gas kick.

Tensile: $DF_T = 1.60$

a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8441 in brine water (10.2 ppg).

Production Casing

Collapse:

 $DF_c = 1.125$

Full Internal Evacuation: Collapse force is equal-to mud gradient (0.531 psi/ft) in Which the casing will be run and internal evacuation of casing.

b. Cementing:/Collapse/force is equal net force of the planned cement slurry gradient (0.688 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_B = 1.125$

a. Pressure Test: Pressure test will be to 80% of Internal Yield Pressure of casing intended for fracture stimulation.

Tensile: $DF_T = 1.60$

a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8472 in oil-based mud (10.0 ppg).

Goonch Fed Com 04 222H 3-string Casing Design Assumptions

Surface Casing

Collapse: DF_c = 1.125

Full internal Evacuation: Collapse force is equal to mud gradient (0.433 psi/ft) in which the casing will be run and internal evacuation of casing.

b. Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.718 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_{R} = 1.125$

> Casing Pressure Test: According to BLM Onshore Order No. 2 with 0.22 psi/ft or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

Tensile: $DF_T = 1.60$

> Overpull: A tensile-force of 100,000 lbs over string weight with a buoyancy factor of a. 0.8727 in water (8.33 ppg).

Intermediate Casing

Collapse:

 $DF_C = 1.125$

Full Internal Evacuation: Collapse force is equal to mud gradient (0.531 psi/ft) in а. which the casing will be run and internal evacuation of casing.

Cementing: Collapse force is equal net force of the planned cement slurry gradient (0:626 psi/ft) in which the casing will be run and internal force equivalent to the displacement of fluid gradient.

Burst: $DF_B = 1.125$

a. Casing Pressure Test: According to BLM Onshore Order No. 2 with 0.22 psi/ft or 1500 psi, whichever is greater but to exceed 70% of the minimum internal yield.

b. Gas Kick Internal burst load of a 50 bbl gas kick at the casing with drill pipe in the, hole. External force will be 10.2 ppg brine water gradient (0:531 psi/ft) and internal force will be with 10.0 ppg brine water gradient (0.521 psi/ft) with gas kick.

Tensile: $DF_T = 1.60$

> a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8441 in brine water (10.2 ppg).

Production Casing

Collapse: $DF_c = 1.125$

a. Full Internal Evacuation: Collapse force is equal to mud gradient (0.531, psi/ft) in which the casing will be run and internal evacuation of casing.

Cementing: Collapse force is equal net force of the planned cement slurry gradient (0.688 psi/ft) in which the casing will be run and internal force equivalent to fresh water displacement gradient (0.433 psi/ft).

Burst: $DF_B = 1.125$

> Pressure Test: Pressure test will be to 80% of Internal Yield Pressure of casing a. intended for fracture stimulation.


Tensile: $DF_T = 1.60$


a. Overpull: A tensile force of 100,000 lbs over string weight with a buoyancy factor of 0.8472 in oil-based mud (10.0 ppg).

TECHNICAL DATA SHEET TMK UP TMK UP™ DQX 5.5 X 20 P110

Norninal OD. (inch)	5.500
Wall Thickness (inch)	0.361
Pipe Gradé	P110
Coupling	Regular
Coupling Grade	P110
Drift	Standard
CONNECTION PARAMETERS	
Connection OD (Inch)	6.050
Connection ID, (inch)	4.778
Make-Up Loss (Inch)	4.122
Connection Critical Area, (sq.inch)	8.722
Yield Strength in Tension, (klbs)	541
Yeld Strength in Compression/(klbs)	641
Tension Efficiency	100%
Compression Efficiency	100%
Min, Internal Yield Pressure (psi)	12 640
Collapse Pressure. (p.si)	11,110,
Uniaxial Bending (deg/100ft)	92.0
MAKE-UP TORQUES	
Minimum Make Up Torque, (ft-lb)	140600
Optimum Make-Up, Torque, (ft-lb)	12.900
Maximum Make-Up Torque ([ft-lb)	14 100
Operating Torque (ft-lb)	17 500
(ield Torque, (ft:lb)	20 600


PIPE BODY PROPERTIES	
PE Weight (lbs/ft)	19.81
Nominal Weight, (lbs/ft)	20.00
Nominal ID, (inch)	4,778
Drift Diameter (inch)	4.653
Nominal Pipe Body Area, (sq inch)	5.828
Yield Strength in Tension (klbs)	641
Min: Internal Yield Pressure, (psi)	12 640
Collapse Pressure, (psi)	11 110
Minimum Yield Strength (psi)	110 000
Minimum Tensile Strength; (psi)	125,000

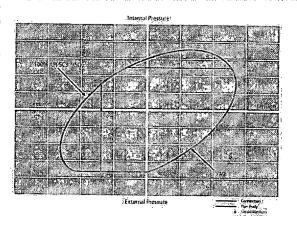

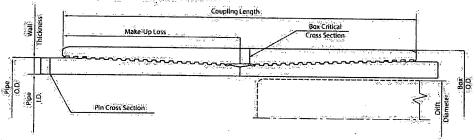

NOTE. The content of this Pethodak Data Sheet is for general information only and uses not quantities peruvinance or many financial installation and a competent design professional can determine to provide the installation and a person parameter. This information appeared at gone (an around for the information that is provided that is provided to the around the information and the information and the information around the information and information and the information around the information around the information around the information and information around the information

Print date: 05/29/2019 00:48;

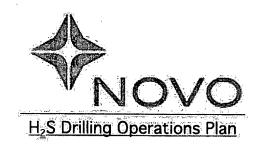

- a. All personnel will be trained in H₂S working conditions as required by Onshore Order 6 before drilling out of the surface casing.
- b. Two briefing areas will be established. Each will be at least 150' from the wellhead, perpendicular from one another, and easily entered and exited. See H₂S page 5 for more details.
- c. H₂S Safety Equipment/Systems:
 - i. Well Control Equipment
 - Flare line will be ≥150' from the wellhead and ignited by a pilot light.
 - Beware of SO₂ created by flaring.
 - Choke manifold will include a remotely operated choke.
 - Mud gas separator
 - ii. Protective Equipment for Essential Personnel
 - Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest.
 - One self-contained breathing apparatus (SCBA) 30-minute rescue pack will be at each briefing area. Two 30-minute SCBA packs will be stored in the safety trailer.
 - Four work/escape packs will be on the rig floor. Each pack will have a long enough hose to allow unimpaired work activity.
 - Four emergency escape packs will be in the doghouse for emergency evacuation.
 - Hand signals will be used when wearing protective breathing apparatus.
 - Stokes litter or stretcher
 - Two full OSHA compliant body harnesses
 - A 100-foot long x 5/8" OSHA compliant rope
 - One 20-pound ABC fire extinguisher

iii. H₂S Detection & Monitoring Equipment

- Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest.
- A stationary detector with three sensors will be in the doghouse.
- Sensors will be installed on the rig floor, bell nipple, and at the end of the flow line or where drilling fluids are discharged.
- Visual alarm will be triggered at 10 ppm.
- Audible alarm will be triggered at 10 ppm.
- Calibration will occur at least every 30 days. Gas sample tubes will be kept in the safety trailer.

iv. Visual Warning System

- Color-coded H₂S condition sign will be set at the entrance to the pad.
- Color-coded condition flag will be installed to indicate current H₂S conditions.
- Two wind socks will be installed that will be visible from all sides.

v. Mud Program

- A water based mud with a pH of ≥ 10 will be maintained to control corrosion, H₂S gas returns to the surface, and minimize sulfide stress cracking and embrittlement.
- Drilling mud containing H_2S gas will be degassed at an optimum location for the rig configuration.
- This gas will be piped into the flare system.
- Enough mud additives will be on location to scavenge and/or neutralize H₂S where formation pressures are unknown.

vi. Metallurgy

- All equipment that has the potential to be exposed to H_2S will be suitable for H_2S service.
- Equipment that will meet these metallurgical standards include the drill string, casing, wellhead, BOP assembly, casing head and spool, rotating head, kill lines, choke, choke manifold and lines, valves, mud-gas separators, DST tools, test units, tubing, flanges, and other related equipment (elastomer packings and seals).

vii. Communication from well site

 Cell phones and/or two-way radios will be used to communicate from the well site.

d. A remote-controlled choke, mud-gas separator, and a rotating head will be installed before drilling or testing any formation expected to contain H₂S.

Company Personnel to be Notified

Kurt Shipley, Vic	e-President - Operations	Office: (40	05) 609-1596


911 or (575) 745-3600
911 (575) 887-7551
(575) 887-9511
(575) 887-4100
(575) 885-4835
(575) 885-3138
(575) 748-1283
(505) 476-3440
(575) 637-7201
(575) 234-5972
(800) 424-8802
(800) 887-6063
(214) 665-6444


Residents within 3/4 mile

none

Air Evacuation


	9
Med Flight Air Ambulance (Albuquerque)	(800) 842-4431
Lifeguard (Albuquergue)	(888) 866-7256
<u>Veterinarians</u>	•
v-ecennamans	
Desert Willow Veterinary Services (Carlsbad)	(575) 885-3399
Animal Care Center (Carlsbad)	(575) 885-5352

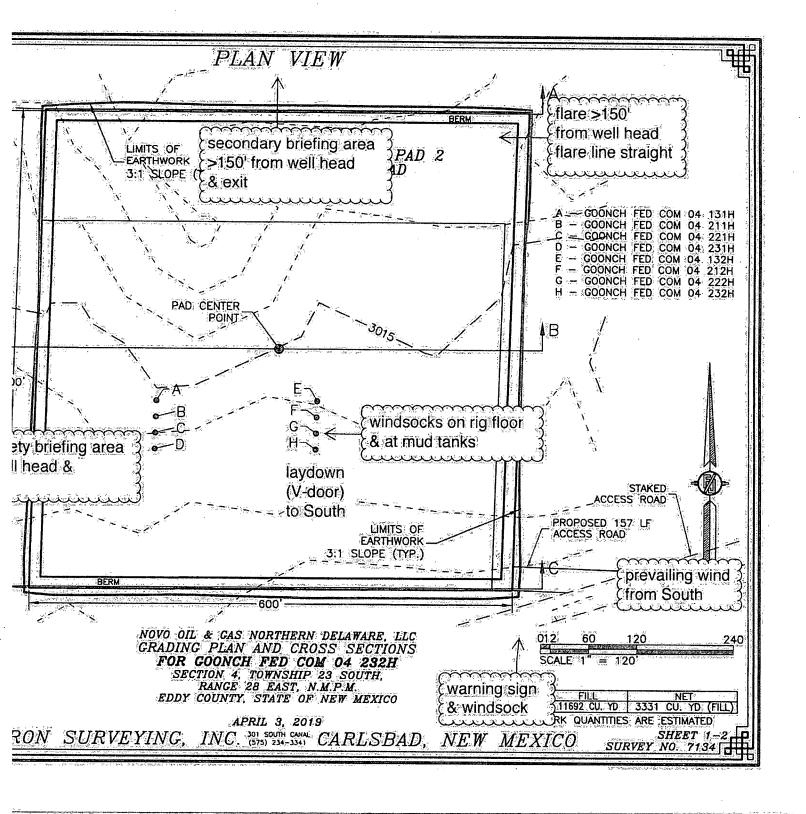

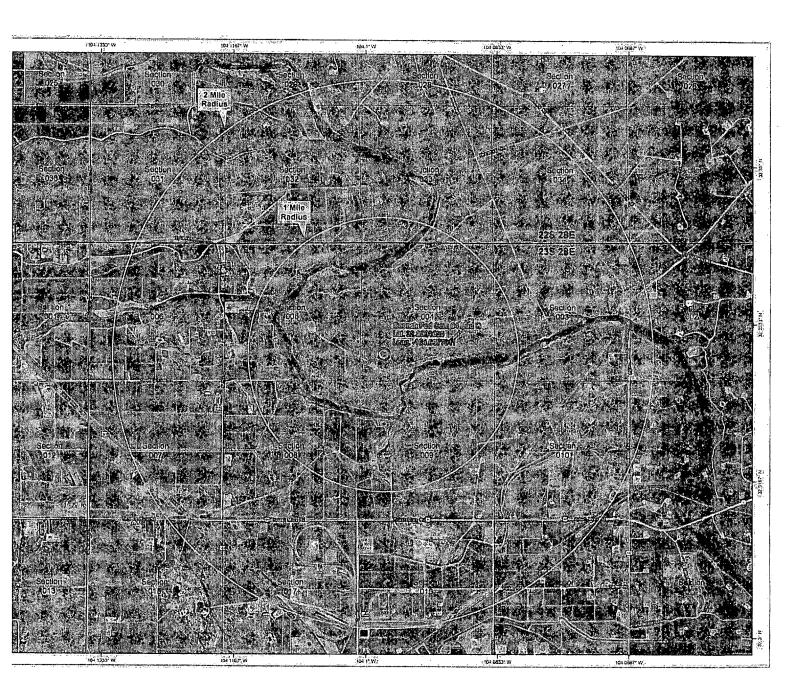

Novo Oil & Gas, LLC



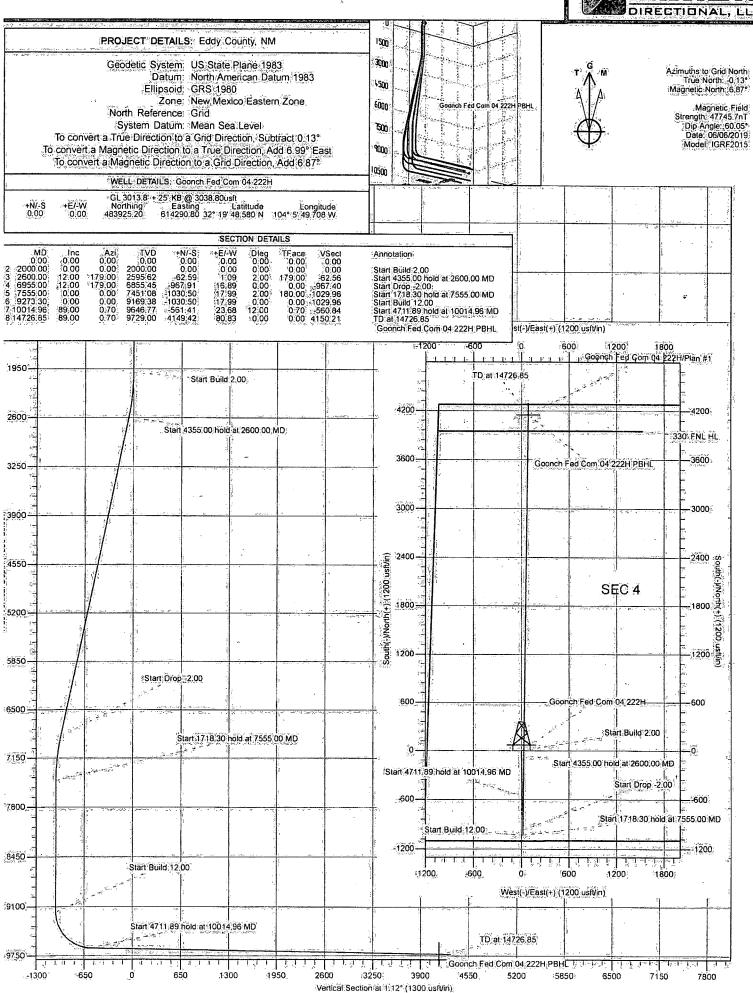

Hawkeye Directional

Planning Report



Database: Company: 2 - - - Project: Site: Well:

HED_Compass_DSN Novo Oil & Gas, LLC Eddy County, NM SEC 4 - T23S - R28E Goonch Fed Com 04 222H

Wellbore: ОН Design: Plan #1 Local Co-ordinate Reference:

TVD Reference: MD Reference:

North Reference: 👡 🚜 Survey Calculation Method: Well Goonch Fed Com 04 222H GL 3013 8' + 25' KB @ 3038 80usft GL 3013 8 + 25 KB @ 3038 80usft

Minimum Curvature

Project

Map System: Geo Datum:

US State Plane 1983 North American Datum 1983:

Eddy County, NM

New Mexico Eastern Zone

System Datum:

Mean Sea Level

Map Zone:

SEC 4 - T23S - R28E Site, 🗁

Site Position:

From:

Well:

Northing:

Easting:

483,964.87 usft 614,092.09 usft

Latitude: Longitude:

32° 19' 48.977 N 104° 5' 52.023 W

Position Uncertainty:

Мар

0.00 usft

Slot Radius:

13:200 in

Grid Convergence:

0.13 °

Well Position

+N/-S +E/-W

Plan #1

-39.67 usft 198 71 usft Northing: Easting:

483,925.20 usft 614,290.80 usft

Latitude: Longitude: 32° 19' 48 580 N 104° 5' 49.708 W

Position Uncertainty

0.00 usft

Goonch Fed Com 04 222H

Wellhead Elevation:

Ground Level:

3,013.80 usft

Wellbore

ОН

Model Name Magnetics Sample Date

IGRF2015 06/06/19 Declination 6.99 Dip Angle

60.05

Field Strength (nT);

47,745.72591512

Design

Audit Notes:

Version:

Phase:

PLAN.

Tie On Depth:

0.00

Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) #(\$) { * \$ 0.00 0.00 0.00 1.12

Plan Survey Tool Program . Depth From

Depth To

(usft) ... Survey (Wellbore)

Date 06/09/19

Tool Name

Remarks

0.00

14,726.85 Plan #1 (OH)

MWD

OWSG MWD - Standard

Plan Sections	i jij		i prodesta jeni			MADONIS ISCUMBATA				
⊟ Measured:	4.		Vertical			Dogleg	Bulld*	Turn		
电影,这是一种电影	nclination	Azimuth 🖖	Depth	+N/-S	+E/-W	Rate	Rate -	n Rate	тғолда 📜	Balling Sal
(usft)	(i)		e (usft)	ے (usft) ا	(usft) <	. (°/100ft), =	(°/100ft) = (°	E(°/100ft)}	友 (P) 表表示	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0:00	0.00	
2,000.00	0.00	0:00	2,000.00	0.00	0.00	0.00	0.00	0.00	"Õ.OO	
2,600,00	12:00	41,79(00	2,595.62	÷62:59	1.09	2.00	2:00	0.00	179.00	
6,955.00	12.00	179:00	6,855,45	-967.91	16:89	0,00	0.00	0.00	0.00	
7.555.00	0.00	0.00	7,451.08	-1,030.50	17,99	2.00	-2:00	0.00	180.00	
9,273.30	0.00	0.00	9,169.38	-1,030:50	17.99	0.00	0.00	0.00	0.00	
10,014,96	89.00	0.70	9,646.77	-561.41	23 68	12.00	12.00	0.00	0.70	
14,726.85	89.00	0.70	9:729.00	4 149 42	80.83	0.00	0.00	0.00	0.00 Goonc	h Fed Com 04

Hawkeye Directional

Planning Report



Database: Company: Project: Site: Well:

Wellbore: Design:

HED_Compass_DSN Novo Oil & Gas, LLC Eddy County, NM SEC 4 - T23S - R28E Goonch Fed Com 04:222H

Local Co ordinate Reference: IVD Reference: MD Reference: North Reference: Survey.Calculation Method:

Well Goonch Fed Com 04 222H GL 3013 8' + 25' KB @ 3038 80usft GL 3013 8' + 25' KB @ 3038 80usft Grid

Minimum Curvature

Lactoretical	- Constant of the Constant of Street	-	CONTROL CONTRO			4.48E_14.64E84.53E1	2011	-	Property of the Control of the Contr	Name and the same of the same
Plan	ned Survey		DI MANAGERANG TENGHAM	COSTS STOLENS AND ADDRESS OF THE PARTY OF TH		sidadi: mazikani sa sa ua	ALICE CONTRACTOR OF THE PARTY O	Eba electric community		TO THE PERSON NAMED IN
1						The second second				CONTRACTOR SCHOOL LAW SHOWN - CALLERY
				1000		in the state of		87 7 10 14		
	- Measured -	AND LINE	2 77	- Vertical 💮 🦮			Vertical	Dogleg	Build .	Turn 🚟 👯
	Depth Inc	lination	Azimuth	Depth	*+N/-S	+E/-W	Section	Rate	Rate	Rate
6.54	(usft)	(°)	(*) ***********************************	(usft)	AND THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS	(usft)	(usft)	/(°/100ft)	The second secon	(°/100ft)
74.1		17,745 - 21,000				· (usit)	La John Mill	A vinging	A Section 1	All Property and the second
Į ^s	0.00	0.00	0.00	:0:00	0.00	0.002	0.00	0.00	0.00	0.00
1	100.00	0:00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
1	200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	776, 549
	300.00	0.00	0.00	300.00	0.00	0.00	22. 12. 20.			0.00
ļ.	400.00		354418444	5 45 A 12 46 19 B		0.00	0.00	0.00	0:00	0.00
l,	730.00	0.00	0.00	400.00	0.00	(0,00	0.00	-0:00	0.00	0.00
1	500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
	600.00	0.00	*0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
ŀ	700.00	0.00	0.00	700.00	0.00	0.00	0:00			
	800.00	0.00	0.00	800.00		W 7. V		.0.00	0.00	0.00
<u> </u>	900.00	0.00	10000000	7. S. C. M. M. C. A.	.0.00	0.00	0.00	0.00:	0.00	0.00
1	900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1	1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0:00	0:00
	1,100,00	0.00	0.00	1,100.00	0:00	0.00	0.00	0.00		
1	1,200.00	0.00	0.00	1,200.00	0:00		•		0:00	0:00
1	1,300.00	0.00	0.00			,0:00	0,00	0.00	0.00	0.00
	pm 1 m 1 1			1,300:00	0.00	0.00	0.00	0.00	0.00	0:00
1	1,400.00	0.00	0.00	1,400.00	(0:00)	0.00	0.00	0.00	0.00	0.00
	1,500.00	0.00	0.00	1,500.00	0.00	0.00	·0:00j	[0.00]	0.00	0:00
1	1,600.00	0.00	0.00	1,600.00	0.00	0:00	0.00		0.00	affect country
	1,700.00	0.00	0.00	1,700.00	:0,00;			0.00		0.00
1				H-1		0.00	0.00	0.00	0.00	0.00
-]	1,800.00	÷0.00	0:00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
A	1,900.00	0.00	0.00	1,900,00	0.00	0.00	0.00	0.00	0.00	0.00
	2,000.00	(O.00)	0.00	2,000:00	0.00	0.00	÷0:00	0.00	0.00	0.00
1	Start Build 2.00	,,,,,,,,,	,0.9.5,	2,000,00	.0.00	0.00	0.00	:0,00	0.00	0.00
1	The Proposition of the Control of th	2. 292	distribution.	1.1111		7				
	2,100.00	2.00	179.00	2,099.98	-1.74	0.03	-1.74	2.00	2.00	0.00
1	2,200.00	4:00	179.00	2,199.84	-6.98	0.12	-6.97	2.00	2.00	0.00
	2,300.00	6.00	1.79.00	2,299.45	-15.69	0.27	-15.68	2.00	2.00	0.00
	2,400.00	8.00	179.00	2,398.70	-27.88	0.49	-27.86	2.00	₹ 2.00	0.00
		****	470.00	0440747	40000	- 45-4-54-429				
1	2,500.00	10.00;	179.00	2,497.47	-43.52	0.76	-43,49	2.00	2:00	0.00
1	2,600.00	12.00	179:00	2,595.62	-62.59	1.09	-62.56	2.00	2.00	0.00
Ì	Start 4355.00 hold	d at 2600.00 M	ID:							
1	2,700,00	12:00	179:00	2,693.44	-83 38	1.46	-83.34	0.00	0.00	0.00
1	2,800.00	12.00	179:00	2,791.25	-104.17	1.82	-104.11	0.00	0.00	0.00
1	2,900,00	12.00	179:00	2,889.07	-124.96	2.18	-124.89	0.00	0.00	0.00
1		6/0/(R000/AB)	0.00 \$4150.40	A CONTRACTOR OF THE PARTY			,		0.00	
4	3,000:00	12:00	179:00	2,986.88	£145\75	2.54	-145.67	0.00	0.00	0.00
1	3,100:00	12:00	179.00	3,084.70	-166.53	2.91	-166 44	0.00	0.00	0.00
1	3,200.00	12:00	179.00	3,182.51	-187 32	3.27	-187.22	0.00	0.00	0.00
	3,300.00	12.00	179.00	3,280,33	-208:11	3.63	-208.00	0.00	0.00	0.00
1	3,400.00	12.00	179.00	3,378:14	-228.90	4.00	-228.78	0:00	0.00	0.00
1	312-14-92-4-91-30-4		77100-0100							
]	3,500.00	12.00	179.00	3,475.96	-249.69	4.36	-249.55	0.00	0.00	0.007
di di	3,600,00	12.00	179.00	:3,573.77	-270.47	4.72	-270.33	0.00	0.00	⊘0.00
i	3,700.00	12.00	179:00	3,671.59	-291.26	5.08	-291.11	.0:00	0.00	/0:00
	3,800.00	12.00	179 00	3,769.40	-312.05	5.45	-311.88	0:00	0.00	(0:00)
F	3,900,00	12.00	179.00	3,867.22	-332.84	5.81	-332.66	0.00	0.00	0.00
					14.50.000	1.6.220			5/3/40).3	
Ĺ	4,000.00	12.00	179.00	3,965.03	-353.63	6.17	-353:44	0.00	0.00	10(00)
Į.	4,100.00	12.00	179.00	4,062.84	-374.41	6:54	-374:21	0.00	0.00	10:00 :
	4,200.00	12.00	179.00	4,160.66	-395.20	6:90	-394.99	0:00	0:00	0.00
1	4,300.00	12.00	179.00	4,258.47	-415.99	7:26	415.77	0.00	0.00	0.00
1	4,400,00	12.00	179.00	4,356.29	-436.78	7.62	-436.55	0.00	0.00	0.00
1		Mr. St. 1.1		V.			44.00.00			
1	4:500.00	12.00	179.00	4:454:10	-457.57	7.99	-457:32	0:00	0.00	0.00
ľ	4,600.00	12:00	179.00	4,551.92	-478:35	8:35	-478.10	0.00	0.00	(0.00
	4,700.00	12:00	179.00	4,649.73	-499.14	8:7.1	-498.88	0.00	0.00	0.00
The control of	4,800.00	12.00	179.00	4,747.55	-519.93	9.08	-519.65	0.00	0.00	0.00
7	4,900.00	12:00	179.00	4,845.36	-540.72	9.44	-540.43	0.00	0.00	0:00
	4;900.00									
	5,000.00	12.00	179:00	4,943.18	-561-51	9.80	-561.21	0.00	0.00	0.00

Hawkeye Directional

Planning Report



Database: Company: Project: Site: Well: Wellbore:

Design

HED_Compass_DSN Novo Oil & Gas. LLC Eddy County, NM SEC 4 - T23S - R28E

Goonch Fed Com 04 222H

Plan #1

Local Co-ordinate Reference:

TVD Reference: L MD Reference: North Reference: Survey Calculation Method:

Well Goonch Fed Com 04 222H GL 3013 8" + 25" KB @ 3038 80usft GL 3013 8" + 25" KB @ 3038.80usft

Minimum Curvature

Design: Pl	an #1,				formes to		and the same of the same and the	n Andrew On Andrews Make Several Control of Several Control	
Planned Survey							Keria parahan menerakan	a substitute of the substi	
Carried Process	(14 m/4 to				MARINE E				
Measured			Vertical			Vertical	Dogleg	Build &	Tum .
Depth in	clination 🛴	Azimuth 1	Depth Acc	+N/-S	+EJ-W.	Section	Rate	Rate	Rate
AND THE WALLE STATE OF THE LAND THE LAND TO SECURE AND A LAND	的单位工程的工程的工程	_ (°) = = = :	(usft)	(usft)	(üŝft)	(usft)	AND THE PARTY OF T	ALL THE PROPERTY OF A STREET OF THE PARTY OF	(°/100ft)
	كالشياف والمجال والماكاة			. ala estánta i estánta (f.					And the second second second
5,100.00 5,200.00	12.00 12.00	179.00 179.00	5,040.99 5,138.81	-582.29 -603.08	10.16	-581 98	(0:00)	0.00	0.00
5,300.00	12.00	179.00	5,236.62	-623.87	10.53 10.89	-602:76 -623:54	0.00	0.00	0.00 0.00
5,400.00	12.00	179.00	5,334,44	-644.66	11.25	-644.32	0.00	0.00	0.00
1 - 100 to 100 t	* * * * * * * * * * * * * * * * * * * *	•	p / 4/4			7.00.00.00.00.00			i i
5,500.00 5,600.00	12.00 12.00	179.00	5,432.25 5,530.07	-665:45 -686:23	11.62 11.98	-665:09	0.00	0.00	0.00
5,700.00	12.00	179.00	5,627.88	-707 02	12.34	-685.87 -706.65	0.00	0.00 0.00	0:00 0:00
5,800.00	12.00	179.00	5,725.70	-727.81	12.70	-727.42	0.00	0.00	0.00
5 900.00	12.00	179.00	5,823.51	-748.60	13.07	-748.20	0.00	0.00	0.00
6,000.00	12.00	179.00	5,921:33	-769.39	13.43	-768.98	0.00	0.00	0.00
6,100.00	12.00	1.79.00	6,019.14	-790 17	13.79	-789.75	0.00	0.00	0.00
6,200.00	12.00	179.00	6,116.95	-810.96	14.16	-810.53	0.00	0.00	0:00
6,300.00	12.00	179.00	6,214.77	-831.75	14.52	-831.31	0.00	0.00	0.00
6,400.00	12.00	179.00	6,312.58	-852 54	14.88	-852:09	0.00	0.00	0.00
6,500.00	12.00	179.00	6,410.40	-873,33	15.24	-872.86	0.00	0.00	0.00
6,600.00	12 00	179.00	6,508.21	-894.11	15.61	-893.64	0.00	0.00	(0:00)
6,700.00	12.00	179.00	6,606.03	-914.90	15.97	-914.42	0:00	0.00	10.00
6,800.00	12.00.	179.00	6,703.84	-935.69	16.33	<u>-</u> 935.19,	0:00	0.00	10.00
6 900 00	12.00	179.00	6,801.66	-956:48	16.70	955.97	0:00	0.00	(0.00
6 955 00	12.00	179.00	6,855.45	-967.91	16.89	-967.40	0.00	0.00	0.00
Start Drop -2.00									
7,000.00	11,10	179.00	6,899.54	-976.92	17.05	-976.40	2.00	-2.00	0.00
7:100:00	9.10	179.00	6,997.99	-994.45	17.36	-993.93	2:00	-2.00	€0.00;
7,200.00	7.10 6.10	179:00	7,096.99	-1,008:54	17.60	-1,008.01	2:00	-2.00	0.00
7,300:00	5.10	179:00	7,196.42	-1,019.16	17.79	-1,018.62	2:00	-2.00	0.00
7;400.00	3.10	179.00	7,296.15	-1,026.31	17,91,	-1,025.77	2:00	∉ £2:00 }	0.00
7,500:00	1:10	179.00 0.00	7:396:08	1,029,98	17.98	-1,029.43	2.00	-2.00	0:00
7,555:00 Start 1718:30 hol	0.00;		7,451.08	-1,030.50	17.99	-1,029.96	2)00	<u>-2</u> .00	0.00
7,600.00	0.00	ָטָיָט. 0:00	7,496.08	-1,030,50	17.99	-1,029.96	0:00	0.00	0.00
7,700.00	0.00	0.00	°7;596:08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
1.	0.00	0.00	7,696.08	2.0			•	700.17	
7,800.00 7,900.00	0.00	0.00	7,596.08	-1,030.50 -1,030.50	17.99 17.99	-1,029,96 -1,029,96	0:00 0:00	0.00	0.00
8,000.00	(0:00)	0.00	7,896.08	-1,030.50	17.99	-1,029.96	0100	0.00	0.00
8,100.00	0.00	0.00	7,996.08	-1,030.50	17.99	-1,029.96	0:00	0.00	0.00
8,200:00	0.00	0.00	8,096,08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
8;300.00	0.00	0.00	8,196,08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
8;400:00	0.00	0.00	8 296.08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
8,500.00	:0:00	0.00	8,396.08	-1,030,50	17.99	-1,029.96	0.00	0.00	0.00
8,600,00	0.00	0.00	8,496 08	-1,030,50	17:99	-1,029.96	0.00	0.00	0.00
8,700.00	0.00	0.00	8,596.08	-1,030.50	17.99	-1,029.96	0.00	0.00	,0:00:
8 800.00	0.00	0.00	8,696.08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
8,900.00	0.00	0.00	8,796.08	-1,030.50	17.99	-1,029.96	0.00	0.00	0.00
9,000.00	0.00	0.00	8,896.08	-1,030,50	17.99	-1,029.96	0.00	0.00	(0.00)
9,100.00 9,200.00	0.00 0.00	0.00 0.00	8,996.08 9,096.08	-1,030.50 -1,030.50	17.99 17.99	-1,029.96: -1,029.96	0.00	0.00	(0.00° (0.00°
	~					-1,029,96	0.00	0.00	1
9,273.30	0.00	0.00	9,169.38	-1,030.50	17,99	-1,029.96	0.00	0.00	0.00
Start Build 12.00		55 70 400	e compare a service	a green and a	يرجر وودها المرازي	daga magamadah. S	Store with a	W. 15 5 1 2	
9,275.00	0.20	0.70	9,171.08	-1,030.50	17.99	-1,029.95	12.00	12.00	.0.00
9,300.00	3.20	0.70	9,196,07	-1,029.76 -1,027.71	18.00	-1,029:21	12.00	12:00	(0.00)
9;325:00 9;350:00	6.20 9.20	0.70 0.70	9,220.98 9,245.75	-1,027.71 -1,024:36	18:02 18:06	-1;027:16 -1;023.81	12,00 -12,00	12:00/ 12:00	0.00
			• "						0.00
9,375.00	12.20	0.70	9,270.31	-1,019,71	18:12	-1,019 <u>:</u> 17	12.00	12:00	0.00

Hawkeye Directional

Planning Report



Database: Company Project: Site: Well: Wellbore: 2444 Design:

HED_Compass_DSN Novo Oil & Gas, LLC Eddy County, NM SEC 4 - T23S - R28E

Goonch Fed Com 04 222H Plan #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:

MD Reference:

North Reference:
Survey Calculation Method Grid

Well Goonch Fed Com 04 222H GL 3013.81 + 25' KB @ 3038.80usft GL 3013:8'+ 25' KB @ 3038 80usft

Minimum Curvature

Design:	Plan #1				discount in the			manufacture of the second seco	
Planned Survey		is some administrative	Transport School Service	S. CALLWAYS				*#####################################	
Bullion of the Control						7. 7. 7. 7. P. S. T.			
Measured			Vertical	4.12		Vertical		Build	
Depth	Inclination	Azimuth	Depth	ANC	S. edd and	Section	Dogleg Rate	Rate	Turn
(usft)	The (°)	. (C)	(usft)	+N/-S	+EI-W	(usft)			Rate
والمستان والمتاكات		V/		(usft)	J. (usft)		(*/100ft)	(°/100ft)	(°/100ft)
9,400.00	15.20	:0:70	9,294.60	-1,013.79	18:19	-1,013.24	12:00	12.00	0.00
9,425.00	18.20	0.70	9,318.54	-1,006.61	18.28	-1,006.06	12.00	12.00	0.00
9,450.00	21,20	0.70	9,342.07	-998.18	18.38	-997.63	12.00	12.00	0.00
9,475,00	24.20	0.70	9,365.13	-988.53	18.50	-987.98	12,00	12.00	0.00
9,500.00	27.20	0.70	9,387.66	-977:69	18.63	-977.14	12.00	12.00	0.00
9,525.00	30 20	0.70	9,409,58	-965.69	18.77	-965.14	12.00	12.00	0.00
9,550.00	33.20	0.70	9,430.85	-952.55	18.93	-952.00	12.00	12.00	0:00
9,575.00	36.20	0.70	9,451,40	-938,32	19:11	-937.77	12:00	12:00	0:00
9,600.00	39.20	0.70	9:471.18	-923.03	19.29	-922.48	12.00	12:00	0.00
9,625:00	42.20	0.70	9,490.13	-906.73	19.49	-906:18	12.00	12.00	0)00
9,650.00	45.20	0.70	9,508:20	-889.46	19.70	-888.91	12.00	12:00	0.00
9,675:00	48.20	0.70	9,525.34	-871,27	19.92	-870.71	12,00	12.00	0.00
9,700:00	51.20	0.70	9,541.50	÷852:20	20:15	-851:65	12.00	12.00	0.00
9,725.00	54.20	0.70	9,556.65	-832/32	20:39	-831.76	12.00	12.00	0.00
9,750.00	57.20	0.70	9,570.74	-811:67	20.64	-811-11	12.00	12.00	0:00
9 775.00	60.20	0.70	9,583.72	-790:31	20:90	-789.75	12:00	12.00	0.00
9,800.00	63.20	0.70	9,595.57	£768:30	₹ 21.17	-767.74	12.00	12.00	0.00
9,825.00	66.20	0.70	9,606.25	-745.70	21.44	-745.14	12.00	12.00	0.00
9,850.00	69:20	0.70	9,615.73	-722.58	21.72	-722.02	12.00	12.00	0.00
9,875.00	72.20	0.70	9,623.99	-698:99	22.01	-698.42	12.00	12.00	0.00
9,900,00	75.20	0.70	9,631.01	-674.99	22.30	-674.43	12.00	12.00	0.00
9,925.00	78.20	0.70	9,636.76	-650.67	22.60	-650 11	12.00	12.00	0.00
9,950.00	81 20	0.70	9,641:22	-626.08	22.89	-625.51	12.00	12.00	0.00
9,975.00	84.20	0.70	9,644.40	-601.28	23,19	-600.72	12.00	12.00	0:00
10,000.00	87.20	0.70	9,646.27	-576 36	23.50	-575.79	12:00	12.00	0.00
10,014,96	89.00	0.70	9,646.77	-561.41	23.68	-560.84	12.00	12.00	0.00
3	9 hold at 10014.96 h					*			•
10,100.00	89:00	0.70	9,648.25	-476.39	24.71	-475.82	0.00	0.00	0.00
10,200,00	89:00	0.70	9,650.00	-376.41	25.92	-375.83	0.00	0.00	0.00
10,300.00	89.00	0.70	9,651,74	-276.43	27.14	-275.85	0.00	0.00	(0,00
10,400.00	89.00	0.70	9,653.49	-176.45	28.35	-175.87	0.00	0.00	0.00
10,500,00	89.00	0.70	9,655.23	-76:48	29.56	-75.89	0.00	0.00	0.00
10,600,00 10,700,00	89.00° 89.00	0:70 0.70	9,656.98	23.50	30.77	24.09	0.00	0.00	.0.00
10,800.00	89.00	0.70	9,658.72 9,660.47	123.48 223.45	31.99 33.20	124.08 224.06	.0:00 .0:00	0.00	0:00
500000000000000000000000000000000000000									0.00
10,900.00	89.00	0.70	9,662.21	323.43	34.41	324.04	0.00	0.00	(0.00)
11,000.00 11,100.00	89.00 89.00	0.70 0.70	9,663.96	423.41 523.30	35.63	424.02	0.00	0.00	.0.00
11,200.00	89.00	0.70	9,665.70 9,667.45	523.39 623.36	36.84 38.05	524.01 623.99	0:00	0.00	(0.00) (0.00)
11,300.00	89.00	0.70	9,669.19	723.34	39.27	723.97	0.00	0.00	0.00
11,400.00	89.00	0.70	9,670.94				•	We are &	
11,500.00	89.00	0.70	9,670.94	823.32 923.30	40.48 41.69	823.95 923.93	0:00	0.00	0.00
11,600.00	89,00	0.70	9.674.43	1,023:27	42.90	1,023,92	0.00	0.00 0.00	0.00
11.700.00	89.00	0.70	9,676.17	1,123.25	44.12	1,123,90	0.00	0.00	0.00
11,800.00	89:00	0.70	9,677,92	1,223,23	45.33	1,223.88	0.00	0.00	0.00
11,900.00	89.00	0.70	9,679.66						
12,000.00	ູ89.00 ⊮89:00	0.70 0.70	9,679.66 9,681.41	1,323,21, 1,423,18	46:54 47:76	1,323.86 1,423.84	0.00	0.00	0.00
12:100:00	,89100 ,89100	0.70	9,683.16	1,523.16	48.97	1,423.84 1,523.83	0.00 0.00	0.00	0.00
12,200.00	89.00	0.70	9,684,90	1,623.14	50.18	1,623.81	0.00	0.00	0.00 0.00
12,300.00	89.00	0.70	9,686.65	1,723.12	51:39	1,723.79	0.00	0.00	(0)00°
200000.000									
12,400.00 12,500.00	89.00 89.00	0.70 0.70	9,688.39 9,690.14	1,823.09 1,923.07	52.61 53.82	1,823.77 1,923.75	0.00 0.00	0.00	0.00
12,600.00	89:00	0.70	9,690,14	2,023.05	55.03	1,923.75 2,023.74	0.00	0.00 0:00	0:00; 0:00;
12,700.00	89.00	0.70	9,693.63	2,123.03	56:25	2,123.72	0.00	0.00	0.00

Hawkeye Directional

Planning Report



Database: Company: Project: Site: Well: Wellbore:

HED_Compass_DSN Novo Oil & Gas; LLC Eddy County, NM SEC 4 - T23S - R28E Goonch Fed Com 04 222H

ОН Design: Plan #1

Local Co-ordinate Reference: TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

Well Goonch Fed Com 04 222H GL 3013 8' + 25' KB @ 3038 80usft GL 3013.8" + 25" KB @ 3038 80ush


Grid

Minimum Curvature

anned Survey	46								
Measured		24.					7.4		
Depth	Inclination	的工程(接通)	Vertical 4.4.4.4.4.4.4.4.4.4.4.4.4.4.4.4.4.4.4.			Vertical	Dogleg	Build **	Turn
(usft)	MCIIII dubii	Azimuth	(usft)	+N/-S	+E/-W	Section	Rate	Rate	Rate
			(usit)	(usft)	(usft)	(usft)	(°/100ft)	(°/100ft)	(°/100ft)
12,800,00	89.00	0.70	9,695.37	2,223.00	57.46	2,223.70	0.00	(0.00)	0:00
12,900.00	89.00	0.70	9,697,12	2,322.98	58.67	2,323.68	0.00	.0.00	Ŏŧ00.
13,000.00	89.00	0.70	9,698.86	2,422.96	58.67 59.88	2,423.66	0.00	0:00	0:00
13,100,00	89.00	0.70	9,700.61	2,522.94	61,10	2,523.65	0.00	0.00	0:00
13,200 00	89.00	0.70	9,702.35	2,622.91	62.31	2,623,63	0.00	0.00	0.00
13,300.00	89.00	0.70	9,704.10	2,722.89	63.52	2,723.61	0.00	0.00	0.00
13,400.00	89.00	0.70	9,705.84	2:822:87	64.74	2,823.59	0.00	0.00	.0.00
13,500.00	89.00	0.70	9,707.59	2,922.84	65.95	2,923.58	0.00	0.00	0.00
13,600.00	89.00	0.70	9.709.33	3,022.82	67(16)	3,023.56	.0.00	0.00	0.00
13,700.00	89.00	0.70	9,711.08	3,122,80	68:38	3,123.54	0.00	0.00	0.00
13,800.00	89.00	0.70	9,712.82	3,222.78	69.59	3,223.52	0.00	0.00	0.00
13,900.00	89.00	0.70	9,714.57	3,322.75	70.80	:3,323:50	0.00	0:00	0.00
14,000.00	89.00	0.70	9,716.31	3,422:73	72.01	3.423.49	0.00	0.00	0.00
14,100:00	89.00	0.70	9,718.06	3,522.71	73.23	3,523.47	0.00	0.00	0.00
14,200.00	89.00	0.70	9,719.81	3,622.69	74.44	3,623.45	0.00	0.00	0.00
14,300.00	89.00	0.70	9,721-55	3,722.66	75.65	3,723.43	0.00	0.00	(0:00)
14,400.00	89.00	0:70	9 723 30	3,822.64	76.87	3.823.41	0.00	0.00	0.00
14,500.00	89.00	0270	9,725.04	3,922.62	78.08	3,923.40	0.00	0.00	0.00
14,600.00	89.00	0.70	9,726.79	4,022.60	79.29	4,023.38	0.00	0.00	0.00
14,700.00	89.00	0.70	9,728.53	4,122.57	80:50	4,123,36	0.00	0.00	0.00
14,726.85	89.00	0.70	9,729.00	4,149.42	80.83	4,150.21	0.00	0.00	0.00
TD at 14726.8		1000	5 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	Committee of the second	4 HATOLOG TOUTS	2 - 4 - 2 - 4 - 2 - 4 - 4 - 4 - 4 - 4 -		. 2, 4, 6	3.00,

DesigniTargets Target Name - hit/miss target Dip - Shape	CARROLL CONTROLLER	Dip Dir	TVD (usft)	+N/-S 11(usft);	+E/-W (usft)	Northing (usft)	Easting ((usft))	Latitude	Longitude
Goonch Fed Com 04 22 - plan hits target center - Point	0.00	0.00	9,729.00	4:149:42	80.83	488;074.62	614,371.63	32° 20 29 641 N	104° 5' 48.659 W

Plan Annotations				
Measured	Vertical	Local Coording	iates	
Depth	Depth/	= +N/-S	+E/-W	
(usft)	(üsft)	u (usft)	(usft)	Comment
2,000.00	2,000.00	,0.00	0.00	Start Build 2:00
2,600.00	2,595.62	-62.59	1.09	Start 4355:00 hold at 2600.00 MD
6,955.00	6,855.45	-967:91	16.89	Start Drop 2.00
7,555.00	7,451.08	-1,030.50	17.99	Start 1718 30 hold at 7555.00 MD
9,273,30	9,169.38	-1,030.50	17.99	Start Build 12:00
10,014:96	9,646.77	561.41	23.68	Start 4711.89 hold at 10014.96 MD
14,726.85	9,729.00	4,149,42	80.83	TD at 14726 85

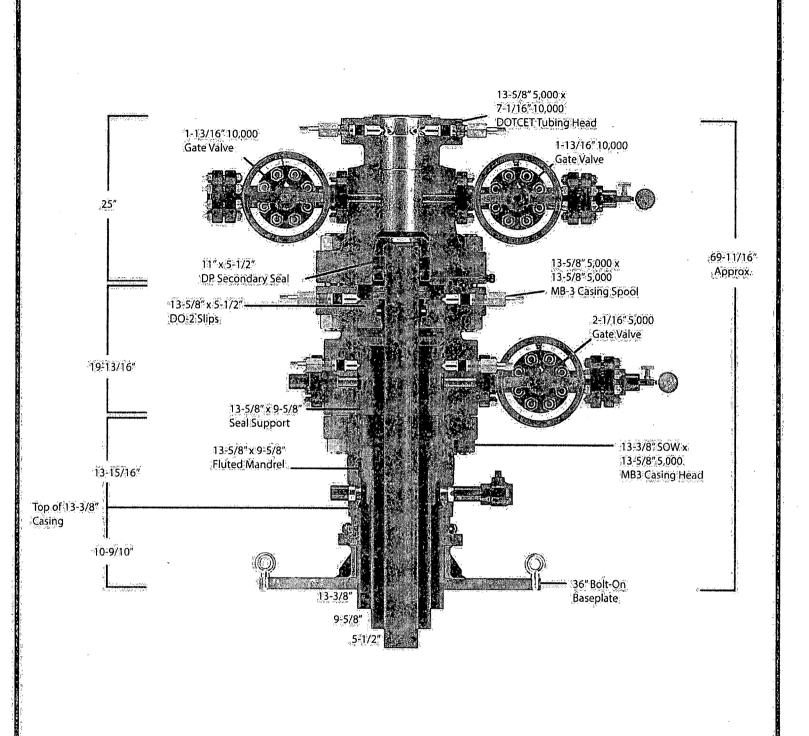

Quotation **Downing Wellhead Equipment** Oklahoma City, Oklahoma - USA Reference Data: **Proprietary and Confidential** TITLE: NOVO OIL & GAS, MB-3 SYSTEM, NOVO The information contained in this drawing is the sole property of Downing Wellhead Equipment, any reproduction in part or in whole without the written permission of Downing Wellhead Equipment is 13-3/8" x 9-5/8" x 5-1/2" SIZE DWG: NO: REV. DRAWN CHECKED A prohibited. APPROVED Weight: Sheet:

, LLC

sk Report



Hawkeye Directional Anticollision Risk Report



Reference Design: Plan #1	Project: Reference Size: Site Error: Reference Well: Well Error: Reference Wellbore	Novo Oil & Gas, LLC Eddy, County, NM SEC 4 - T235 : R28E, 0.00 Geometh Fed Com 04 222H 0.00	Local Co-ordinate Reference: TVP Reference: MD Reference: North Reference: Survey Calculation Method: Output errors are at Database:	Well Goonch Fed Com 04 222H GL 3013 8 + 25 R @ 3038.80ush GL 3013 8 * 25 R @ 3038.80ush Grid Minimum Curvature 2.00 Sigma HED Compass DSN
CONTROL OF THE CONTRO	Reference Design:	Plan #1	Officet TVD Reference:	Offset Datum

	and the second s		
	Risk Settings		KACABANAN PANG PANG
			entral manufacture de la constitución de la constit
ŧ	Vertical Depth for Analysis: Level of Acceptable Risk (1 in):	usit (Below TVD Reference Datum)	
i	Level of Acceptable Risk (1 in):		
1	Minimum Separation:	ūšt	

2.00 Sigma

Scan Method: Error Surface: ISCWSA Closest Approach 3D Pedal Curve

Not applied

1 1 2 4	Survey lool Program 1 Date OSIGE19	Tool Name	Description	
	0.00 /14,726.85 Plan #1 (OH)	WWD	OWSG MWO - Standard	

	Date of	Offset	and white o	of the second second	《新闻》 《金融·西南西西南南
Committee and the second secon	Measured	THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TRANSPORT NAMED IN CO	Distan		The decision of the best of
			Between	Between	7/14/2
e Name	A Part of the second	Depth (ush)	Centres	Ellipses	eparation 4
Officet Well - Wellbore - Design			(UBR)	(nzu)	Factor Warning
C 4 - T235 - R28E	7 (and an		100		And the second s
Goonch Fed Com 04 131H - OH - Plan #1	1,916.60	1,916,80	202,63	189.34	15.243 CC
Goonch Fed Com 04'131H - OH - Plan #1	2,000,00	2,000,00	202.63	188.74	14.587.ES
Goonch Fed Com 04 131H - OH - Plan #1	14,726,85	14,439,36	202,63 877,98	724.04	5 703 SF
Goonch Fed Com 04 132H - OH - Plan #1	2,599,57	2,508.57	38.99		2.215 CC
Goonch Fed Com 04 132H - OH - Plen #1	8,909,45	8,910,11	53.22	,21,39 12.59	0.809 Level 1 , ES, SF
Goonch Fed Com 04 211H - OH - Plan #1	1,916,50	1,917,00	200,34	187,05	15.070 CC
Goonch Fed Com 04 211H - OH - Plan #1	2,100,00	2 099 37	200.82	186.26	13 785 ES
Goonch Fed Com 04'211H - OH - Plan #1	14,726,85	14,543.51	468.71	321,19	3 177 SF
Goonch Fed Com 04 212H - OH - Plan #1	-2,011,33	2,012,21	20.00	6.03	1 432 Level 3 CC
Goonch Fed Com 04 212H - OH - Plan #1	2,200.00	2,202,08	20.54	5.33	1,351 Level 3 ES, SF
Goonch Fed Com 04 221H - OH - Plan #1	2,000,00	1,999,70	200.05	186 17	14.404 CC ES
Goonch Fed Com 04 221H - OH - Plan #1	14,726,65	14,781,86	793 80 201 78	629.32	4 826 SF
Goonch Fed Com 04 231H - OH - Plan #1	2,000.00	1,999.60	201.7B	187,89	14,527 CC. ES
Goonch Fed Com 04 231H - OH - Plan #1	14,726.85	15,354,95	938,59	792,15	6.409 SF
Goanch Fed Com 04 232H - OH - Plan #1	2,555.52	2,551,49	19.64	2.33	1 134 Level 2 CC
Goonch Fed Com 04 232H - OH - Plan #1	3,300.00	3,295,57	23,31	0.57	1,025 Level 2 ES
Goonch Fed Com 04 232H - OH - Plan #1	3,400.00	3 395.58	24 13	0.59	1,025 Level 2 - SF.

ij	set Desi	917	SEC 4 -	T235 - R2	8E - Goon	ch Fed C	am 04 131H	OH - Pla	n #1					Office San	Error 1 0 00
ň	vey Progra	mrs O-MYM			646.40	JE			TALLER.	30.000	1111	1	COMPANIES NO STATE	Officet Wall	Errer: -0.00
ě	Refeten	ce .			Same Major			Desta	nce		10.41			1.1	
	e bured			Vertical	freference .		Baturen 🔆 🕹			Minimum			ked Probability		Matridou
	epth Titl	Depth -	Depth	Depth	44.0		Centers ()	Descence	Epicses	Se par stien	Factor	6 Bep	ration of Collision	3887.1	
•	heur de	(usfi) 4	(vatt)	(unit)	(MIN)	(men)	Into the	(unft)	madi .	(unt)			ctor	Track to	15 M 1.0
	0.00	0.00	0.20	0.20	0.00	0.00	202.63	202 63	cinilia suite e			C.	1 in 1E-6		Marie Carticle Street Marie
	0 03	100 00	0 20 100 20	0 20 100 20	0 00	0.00	202 63 7 202 63	202 63 202 63	202.36	5.27	751 980	9	:4.1 in 15-5		
	100 00 200 00	100 00		100 20	0 00 0 13 0 45			202 63 202 63	202.36 201.64		751 640 205 401	0	* 1 m 1E+9	w Alle	and the same
	100 00 200 00 100 00	100 00 200 00 300 00	100 20 200 20 300 20	100 20 200 20 300 20	0 13 0 49	0 14 0 49 0 85	202 63	202 63 202 63 202 63	201 64 200 63	0.99		0	* 1 m 16+9 * 1 m 16+9	e est of the	ind.
	100 00 200 00	100 00 200 00 300 00	100 20 200 20	100 20	0.13	0.14 0.49	202 63 202 63	202 63 202 63	201 64	0 99 1 70	209 401	0	* 1 m 1E+9	ar Alb	ind d

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

06/09/19 0:33:27PM

Page



i A	eferen) Supers (USF) (Mirchaem Caparette Reparation Factor	a		Ot or	Total Well I	tror:	0.00 m
63 63 63 63 63 63	erwen Sysee (USR) 1	Municipant Magazatic	100(2.0)	经, 是2014年,中国英国的基本。				
63 63 63 63 63		Separation 1900 Factor						
63 63 63 63 63				Contract of the state of the st	XI I	A SEC	iridno L	ni Sali
13 13 13		e paration Factor (Usit)	Pe	tor 1				
n D	105 76	3 85 52 573 4 57 44 327 5 29 36 318 6 07 13 743	:0	<1 in 1649.		***********		
n,	198 06	4 57 44 327	a.	< 1 m 1E-9				
63	107,34	5 29 36 318	0	ed indE+B				
-	196 63	6 01/ 33 (43)	o o	v 1 m 1E+9 v 1 m 1E+9				
	195.10	8.72 30.144 7.44 27.239	٥	4 1 m 1E-9				
13	194 49	8 16 24 845 8 67 22 837 9 89 21 136 10 31 19 660 11 00 18 381	0	1 in 1E-9				
63	193.78	6 67 22 637	70	4 1 m 1E+9				
ន	193 04	9 59 21 130	-0	e.1 in 15-9				
53 S	192 32 191 G1	10 31 19 660	0	4 1 m (5-9				
SO !	190 89	11 74 17 265						
93	190 17	17 AG 16 966	0	4 1 m 16+0				
3	100 46	12 46 16 256 13 17 (15 361	2 G ·	e 1 to 1E +9				
	100 46 189 34	13 29 15 343 13 89 14 567	.0	4 1 m 15+9	CC.			
la,	18h 74		0	* 1 m 18-9	66			
5	150 05	14.50 13.084 16.00 13.688 15.65 13.367 16.50 13.259	ü	<1 m 16+0				
15	189 09 191 51 195 95	16 20 13 608	_Ω	4 1.bn 1E+⊊				
o :	195 95	12 62 13 367	0	v tan tE+8 v tan tE+8				
22	202 41 210 86	17,16 13 267	0	51 in 1619				
4	221 20	17.840(19140)	Q.	<tin td="" t€+9<=""><td></td><td></td><td></td><td></td></tin>				
t 5%	232 89	10 57 . 13 542	0	< 1 in 1€+#				
B	244 47 256 04	19 32 13 657	0	€ 1 in 1E+9				
2	256 04	19 32 13 657 20 68 13 756 20 66 13 826	0	* 1 m 16:0				
	267 59			€ 1 m 12+9				
4	279 14 260 67	21.68 .13.887 22.47 12.835	0	< 1 in 16:0				
9	302 19	25 29 (13 974	o	41 e 18+9				
3.	302 19 313 71 325 21		0	4,1 m 1E+9				
		24 13 14 003 24 97, 14 026	D	€1 m 1E-9				
2	330 71 345 20	25 62 14 042	ė,	* 1 m 18-9				
7	345 20	25 62 14 642 24 67 14 653	, ο :	< 1 m 1 E+D				
2	359 68 371 16		D).	4 1 in 1E-9				
22	367 64	728 41 14 084 29 29 14 065	0	< 1 in 15+9				
	394.11			2000				
	406 57	30 17 14 063 31 00 14 069	0	4 I m.IE-D				
15	A17 (13 ·	231.80 14.053	0	< 1 in 16+9				
3	417 00 426 49	32 84 14 035	ō	1 m 1E-D				
9	430 95	33 74 14 038	i i	4.1 tr 1E-9				
4 -	451 40	34 65 14 026 33 56 14 019	i o	c 1 m 18+9				
0	462 85	35 55 14 019	o	c 1 m 18+0				
5	474 79	36 49 14 005 37 37 13 997	0	COL IN 1E-9				
ii ii	465 74 .	37,37 13 997 35 29 13 986	0	* 1 m 1E+9 * 1 m 1E+9				
2	508 67	39 30 13 974		< 1 to 1E+9				
B .	520 GS	40.12 73.983	0	1 0 15.0				
3.	531 49	41 04 13 980 41.97 13 938	.ŭ	- 1 n 1E-9				
9	542 92 554 30	41.97-13.938	.0	< 1 m (E-9 < 1 m (E-9				
		42 89 13 925	ò	<1 in 15-9				
Ó ·	565 79	43 62 - 13 913 44 74 13 901 45 67 - 13 688	0	4 1 in 16-9				
5	577 22	44 74 13 901 45 67 13 664	0	< 1 in 1E-9				
é	588 65 600 07	48 60 13 816 47.54 13 664	Ď	- 1 in 1E+9				
4	611.60		0	* 1 in 1E-5				
9	622 53	48 47 (13 852 49 40 (13 640 50 34 (13 829 51 27 513 617	Ô	-1 in 18+9				
5	634 35	49 40 13 640	p	1 m 1E+9				
7	645,77	50 34 13 829	0	* 1 m 1E-9				
	068 62	52 21 13 B06	0	4-1 m 15-9				
	(680 04		ö	(1 in 18:9				
5	691 46	53 15 13 794 54 00 13 783	Ď	# 1 m 1E-9				

Hawkeye Directional, Anticollision Risk Report

Local Co-ordinate Reference:
TVD Retrumone:
MD Reference:
North Reference:
North Reference:
Survey Calculation Method:
Output Ferror are all
Office: TVD Reference: Well Goonch Fed Com 04 222H GL 3013.8* + 25' KB @ 3038.80ush. GL 3013.8* + 25' KB @ 3038.80ush. Grid Minimum Curvature 2.00 sigma HED_Compass_DSN Offset Datum

Offset De	dan 2	SEC 4	. T235 . B	2BE - Goon	ch Fad C	om 04 131	u ou o		-	-		Offset Sta Error: 1 18 0 to care
Survey Progr	MIN THE	43	Y 4051	100				Section 15			MYS Wallington	Offset Well Error: 0.00 ush
DESCRIPTION TOWNS OF THE	11.11.07.00	and the second	7. 从高潮100	Contact territor	MA .	~ 1.3						Conserved Error 1000 ESC
Marstred	Verikal Depth	Measured Depth	Vertical Dectio	flaterence	Official	A PATHORN SO	APII ASTII	Gataroan	Minmany, Septem	Hon Rai	act Probability	Warning
tural ex	(uelt)	(VSII)	(OM)	(mh)	(mA)	Centres (units)	Distance (Usft)	Chartes	Bergaration Facts	of General	ntion of Collision for	
6,800.00	6 703 84	6 7-9 E3	6 654 58	(unit) 27 05	27 60	757 GT	757 91	702 85	(LAN) 102-2013 1072 (CD 52	0		
6,600.00	6 801 GG	5,5-8 87	8,751.54	28 43	28 28	770 27	770 21		35 97 13 762	0	<1 m 1E+9	
5,955 DC 7,900 DO	6 855 45 6 899 54	6,503 44	6,60500	26.69	20 54	777 96	777 06		55 49 -13 756	0.0	< 1 an 15-9	
7,100 00	E 937 E9	6.945 11	6 846 72 6 845 84	29 30 29 36	28 76	762 53 794 00	762 53 764 00	725 82		0	< 1 m 1E+9	
7,700,00	7 095 90	7,148.65	7,042 51	29.7e	29 72	60 1 55	804 56		56 71 13 704	ů.	. • 1 an 15-6 . • 1 an 15-9	
7,300 00	7,196.42	7,245,72	7,139.83	30.18	30 20 -	514 26	7814 285	754.70	50 56 33 671	ď.	CT INTERS	
7,400 00	7,296 15	7,344 50	7,738 45	30 54	30 67	823 22	823 22	752,64	50 38 13 635	0	<.1 m 1€-9	
7,500 00	7,398.05	7,412.67	7,332.67	30 67 31 94	31 15	831 54	831 56	770 41	61,15 13 559	0	1 in 1E-2	
7,500.00	7,490 08	7,540 77	7, 128 43	31116	31 41	83\$ 9\$ 83\$ 54	835 95 639 54	774 40 777 68	61,55,13,582 61.87,13,570	, p.;	4 1 m 1E+9	
7,700 00	7,595 (18)	7 638 59	7.524.11	31/44	32.10	847.84	647.84	* 50. 10411				
7,800 00	7.696 08	7,736 40	7 619 79	31.75	32 87	636 57	050 37	783 28	62 57 13 551 53 28 13 541	0	64 1 m 16-0 41 m 16-9	
7,800 00	7,793 08	7,834 22	7.715 48	32 61	33 04	865.70	865 70	601.70	62 94 13 539	:0		
8 100 00	7,898 08 7,995 08	7 932 03	7,811,14	32 29 32 56	33 52 34 04	875 23	675 23	610.61	54 62 12 545	fo:	4 1 m 18.9	•
Via your	A	2.2000	40.00,45	Table 1	7500	834 51	884.51	819 12	65 40 13 526	0	1 1619	
8,200,00	8,096 08 8,196 08	6,190.49 0,276.36	8 036 02 8 153 10	32 97 30 16	34 55	892,17 657.08	897 96	826.00	66 17 13 482	0	1 m 1E-9	
8,400,00	8.290 OB	8,397,16	8 271 56	13 45	35 46	601.75	901,75	634.13	66 91 13 420 67 62 13 534	.á.	<1 m (E+9	
8,500.00	8 395 08	8 515 43	8 300 52	33 74	33 65	503 42	903 42	835 13	68 27 13 223	b	e tin tile	
	8,400 08	B 521.54	8,496.28	.:34 03	36 14	903 51	503 51	n- 0	68 55 13 121	8	*1 in 1E+9	
8,700 00	6 550 00	8 721 94	8 506 25	34.33	36 42	603.51	903 51	634 07	65 44 13 011	ò	4.1 in 1E+9	
8,000,00	6 095 05 . 6 796 08 .	8,821 94 8,921 94	8 698 26 8 796 28	34 67	36 70	903 51	903 51	833 46,	70 02 - 12 003	O	4.1 m 1E-B	
6 906 22	8 ag/ 30	A 924 17	8 602 50	3494	37 00	903.51	903 51 903 51	832 80	70 41 12 796 70 65 12 769	.0	1 m 16-0	
9,000,00	8 890 08:	8 021 43	9,655,76	35 22	37,25	903 51	903 51	832.37	71,10 12,691	,å	4 1 m 16+9	
	8,096,08	0 116 00	8 669 59	25.52	37 44	-1303 61	903 81	832 00	71.75 12.596	ė.	4 1 m 1E+9	
9,200 00	0.096.08	9 203 60	9.071.55	25 62	37 52	605 36	905 38	833 13	72.75 12.531	ő	4 1 m 1E.D	
9 273 30 9 275 00	9 107 28	9,259,39 9,360,60	9 120 77	36 04	37,53	906 29	908.29 908.38	835 76 835 84	72 53 - 12 573 72 54 12 523	9	e im 16+9	
	0,196 07	9 270 30	9,13671	35 12	37 53	600 70	909.75	837 10	72 60 12 531	9	(1 in 1E is	
9 325 00	U 220 08	9.795 78	9.151.02	56.18	37.52	B12.31	911 31	836.66	72 94 12 545	ď	1 m 16-9	
9,350 00	97-579	0,313 08	9 154 89	36 24	37.51	912 92	912 92	840 26	17 66 12 164	Ď	N IEIS	
9,400 00	9 254 60	9,330 15	9,178 19	35 29	37 49	91460	914 50	841 84	72 66 12 588	ď	- 1 m 1E-9	
9 425 00	9.318.54	9,350 00 9,363 65	9 193 14 9 103 24	36 33 56 36	37,47	915 35 916 13	916 35 918,13	843 70	72 65 12 614 72 59 12 649	8	4 1 m 18:9	
	934207.	9,380 47,	9,215.00	36 39	37.44		1.1.					
	9 365 13	9,400,00	9 225 28	36.36 36.42	37,44	919 95 1 921 78	915 65 921 78	847 43 849 33	72 52 12 685 72 45 12 773	o o	4 1 at 16+9 4 1 at 16+9	
9,500 00	B 367 80	9 413 35	9,237 02	26 43	37, 39	923 60	923 60	851.27	72 33: 12 769	ő	4 1 m 16-9	
	0 409 58	9,429.61	5,747.28	26.44	37,36	025 41	925.41	653 20	72 22 12 815	0	4 1 m 1E+0	
	-9 430 85	9 445 7B	9,257.04	36 44	37,33	927,19	927:19	856 11	72 08 12 663	Ø	*1 m 18+9	
9 575 00	9.451.40	9,451 65	9,266 32	38 44	37,30	928 93	¥28 93	920 53	71 94:12 913	8	* 1 m 1E-D	
9 625 00	9,490 13	G.453 76	9,283.36	36 42	37,27	1630 61 932 22	932 22	650 60 53 038	71,77, 12 567. 71 62 13 016	9	* 1 m 1E+9 `	•
9 650 00	9,508 20.	9.5359.60	0.291.15	26 40	37.20	933 75	933 75	802 30	71 45 13 869	à	1 m 16-9	
9 675 00	E 525 34	9 525 00	9.238 31	36 36	37,15	935 10	035 18	863 91	71 27 13 122	Ŏ.	1 m 16-9	
9 700 00	9,541.50	9,541,10	9,305.30	736 38	37,13	906 52	936 57	865 43	71 09 :13 173	o,	4.1 m 18:5	
9 725 00	9,556 65 9,570 74	9,556 17. 9,575 00	9,311 63	36 33 36 33	37 00	637 75	937.75	205 83	70 91 13 224	Ó,	4.1 in 1E+9.	
9 775 00	958372	9 587 94	9,322.50	36.27	37.04 37.01	938 63 639 64	936 86 939 84	860 27	70 75 13 271 70 56 13 319	o o	1 m 1E-9	
9 600 00	9 525 57	9 500 00	9,326.63	34 23	36 98	940 60	940 59	87031	70 36 13 366	ğ	< 1 in 16-0	
9 625 00	9 606 25	9 619 01	9 332 02	36.19	39.93	94739	941 39	871316	70 23 13 405	a	74.1 in 1E-9	
8,850 00	961573	9,634,43	9,335 65	36 15	36 69	941.85	941 95	871.68	70 07 13 443	Ď.	4 1 41 1E-6	
9 900 00	9,623.90" 9,631.01	9,650 00 9,665 37	9 339 27 3 9 342 14	36 07	36 84 36 60	942.30 942.03	942 30 942 02	872 43	CD D3 13 476	o o	in 1Eig	
9,925.00	9,536 76	9,630 79	9 344 53	36.07	36 76	942 71	942 02	672 82 873 05	69 79 13 506 69 67 13 532	9	< 1 m 1E-9 e 1 m 1E-9	
9 250 00	9 641 22	9 700 00	9 345 82	35 99	36 71	942 67	942.67					
9,975,00	9 644 40	9 711 59	9 347 83.	35.95	36 67	942 43	942 67 942 43	873.11 872.98	69 56 13 560 69 46 13 560	0,	4.1 m 1E-9	
10,000,00	9 6 48 27	9,725 00	0.348 64	25 81	30 64	942 00	942 05	672 08	69 37 13 500	o'	e 1 m 1E-9	
10 100 00	9 648 77	0,736.19	9,349 (s	35 89	36 -0	941 75	941 75 970 41	672.42	09 33 13 584	Ø.	< 1 m 18+Ω	
10 200 00	. 100			35 76	1000	100	940 41	871.29	69 12 13 606	₽.	61 m 18+9	
10 300 00	9.650 00	9,914 23	9 349 71	35.79 35.78	36 18	939 92 937 44	938 92	655 92 668 41	69 00 13 609 09 02 13 502		1 in 1E+2	
houside in the									eparation factor.			

06/09/19 9:33:27PM

	n #1	i amangan and ancare.	and the second		Direct Site	Error: 0.00 ush
100	£-1141	CONTRACTOR OF			Officer Well	Error: 0 00 usti
Stetate	ce .	1 T 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Paul dudoù	美国工作协会	**************************************
	Balween 💮	Minimum Begerate	4) P) 1	sed Probability	100 m	Yaurung
		Beparation . Factor	A Bepa	ration of Collision		
100	(uen)	(IMM)。在"西南	4 A	ctore 💮 💢		2.00
96	66677	GJ 19 , 13 527	0	4 1 vi 1E+9	*******	- Continuent Contract
307	864.96	09.51 - 13 445	ă	- 1 m 1E-9		
02	853 00	69 96 13 336	io.	= 1 m 15+9		
56	861 01	170 59 13 203	0	. c 1 m 1£+9		
.11	658 62	71 78 13 044	.0	< 1 to 1E+9		
68	856.52	F72 14 32 873	ď.	4. I in 1E+9		
21	054 10	73 12 12 681	Ö	4 im 16.9		
78	Bat 56	74 22 12 474	Ö	Fin 1E-S		
35	846.92	75 43 12 255	- 6	* 1 in 1£+9		
92	046 10	78 73 12 028	°G	< 1 m 1€+0		
51	643 24	78.17, 11.789	O	4 1 m 1E+0		
DÉ9	540 41	70 68 11 647	Ď	×1 m 1E+9		
69	837.40	81 28 (1 302	ő	* 1 et 1E+8		
29	834 32	62 97 11.058	ō	< 1 m 1E-9		
89	831.15	84 73 10 809	ō	- 1 m 16-9		
51	827 93	E6 57: 10 50-1	0	< 1 in 1E+9		
13	824 65	85 45 10 321	ā	Sin IE-0		
75	821 31	50 44 10 081	ä	4 1 m 1E-9		
36	817.01	92 47 9 545	ŏ	\$ 1 m 1E/P		
02	B14 47	84.56 9 614	5	. 1 m tE∗G		
66	910 99	96 68 B 389	ā	• 1 in 16-9		
31	807 46	58.65 9 158	0			
97	803.90	101 07 8 994	ŭ	^<,7 m 1E+G .≪ 1 is (≦+0		
63	80031	103 32 8 745	ő	in tg-9		
30	796 69	105 62 (8 543	ŏ	at in the		
99	793 04	107 94 6 347	Ū	s,tin 16.0		
66	769.36	1110 30 B 157				
35	785.57	112 65 7 972	e E	< 1 in 1E-9		
ÖS	781 95	115.15 -7 794	ď	* 1 in 1E+0		
78	716 22	117.50 7.021	ă	*1 m 1E+9		
46	774 47	119 00 7,465	õ	- < 1 in 1€+B		
18	t Neste e			0-12-1-1		
18	760 71	122.40 . 7.293	0	* 1 m 1E-9		
83	763 16	124 56 7,136	0	4 1 m 1E • 9		
36	759 37	130 00 6 841	ă	4 1 m 16+9.		
11	755 57	132 54 6701	ğ	4 1 m 15-9		
- 1	3.73	A CONTRACTOR		80 7 8 CH		
86	751.76	135 05 , 8 505	o o	-×1 in 1€+9		
61 38	747.95	137 66 6 433	ø	4 1 th 16+9		
15	7-10 33	142 82 8 164	×	4.1 m 1E+9		
15	730.51	145 11 6 065	0.000	< 1 et 16+9		
71	\$ T. C.	\$1500 R846		 Arabbyjania 		
	732 69	148 01 5 950	0	e t in 16-9		:
50	725 06	150 62 5 639 153 23 5 73 2	0	• 1 m 1E⋅0		
30 98	72404	153 94 5 703	0	43 in 18+9 41 in 18+9	`SF	
	44.50			C. OFFICE	or .	

int, SF. - min separation factor, ES* min ellipse separation

COMPASS 5000 15 Build 91

Hawkeye Directional Anticollision Risk Report

Company:
Project
Reference Stor:
Reference Stor:
Size Error:
Company:
Reference Stor:
Reference Stor:
Size Error:
Company:
Reference Well:
Reference Well:
Reference Wellbore
Reference Wellbore
Reference Design:
Plan #1

Local Co-ordinate Roference: Well Geonch Fed Com 04 222H

TVO Retrience: GL 3013.8° - 25 KB @ 3038 80ush

North Retrience: GL 3013.8° - 25 KB @ 3038 80ush

North Retrience: GGId

Survey Calculation Method: GGId

Output errors are of 200 sigma

HED_Compass_DSN

Other Datum

trey Progr	Am GU	SEC 4	2555	28E - Goon	THE P	西非常现在	OH - Pla	in #1		i de la companya de			Offices Size Error:
ec Ru teru	P-4-79 版的						Oista	PC					Offset Weil Error: 0 O
Jepth usfi)	Depth	Depth (infl)	Depth 3		(12)	Detenan Cardyea (UST)	Distance	Ellipson	Seperation	Pacies	Rist Beper	ed Produbitor illion of Collision	Yaiping si
0.00	innii	C. COLLAND				(matr), 7	(ush)		(una)	為。在	Poc		
. 100 00	0 00 100 00	0.70	10070	0 (13	0.00	40 02 40 02	40 02 40 02	39 75		47 487	õ	- 1 m 1E-8	
200 00	200 00	200 70	200.70	t: 49	0 60	40 07	40.02	19 00	0.99	1 495	័	4 1 in 1E-9	
300 CD 400 DD	300 00	900 70 400 70	300 7G . 400 7G	D 65'	0.55	#107 #302	40 02	36 32	171 3		g. G	c 1 in tE-9	
500 00	500 00	500 70	500 70	1,57.	1.57	40 02	40 02	36 88	3 14 1		o.	4.1 m (E-0	
600 00	600.00	600 70.	600 70	1.93	1.93	40.02	40 02	36.17	3 65		b.	* 1 m (E-#)	
-700 OU	700 00	700.70	700 76	2 20	2.79	10 02	40 02	35, 45	4 97 6	752	ø.	<1 m 1E+8	
900 00	000 00	900 70 900 70	800 70	2 54 3 00	2 6.5 3 00	40 02 40 02	40 02	34 73	a 20 a		o,	4.1 et 1E+9	
1,000 00	1,000,00	1 000 70	1,000 70	3.38	3.36	42.02	40.02	33 30	672		ă,	* 1 m 15 ⋅0	
1,100 00	1 100 00	1,100 70	1,100 70	372	3 72	40.02	940 02-	32 5Z	7.44 5	379	o'	4.1 m 1699	
1,700 00	1,200 00	1,300 70	1,200.70	4 06	4 98	40 02	40 02	31.65	8 16	503	O.	< 1 m 1€+6*	
1,400.00	1,300 00	1,300 70	1,300 70	4 44 4 70	4 44 4 80	40 02 40 02	40 02 40 00	31.15 30.43	8 87 4		oʻ	4.1 m 16+9	
1,500 00	1,500 bo	05.000,1	1,500 /0	5 15	5.16	40 02	40 02	39 71	10 21 3		٥	•1 m 1E-9	
1 600 00	1,600 00	1,600.70	1 600 79	5 51	551	46 02	40.02	29 00	11 05 3	630	0.	61 in 15:9)	
1,700 00	1,700 00	1,700 70	1,700.70	5 87	5 87	40 02	43 02	26 28	11.74		5.	4 1 in 15+0	
1,900,00	1,000 00		1,000 70	6 23 5 59	6 23	40 03 . 40 02	42.02	27 56 26 55	12 46 3 13 14 3		0	<1 in 1E+9	
2,060 00	2,000 00	2,000 71	200071	6 93	.0 95	40 02	-73 02	75,13	13 69 . 2	681	ġ`	4.1 #156.9	
2,100 00	2 009 96	2,102,13	2,102.10	7 20	7 20	39 97	30 97	25 40	145	7.43	0	4.1 in 18+9	
2,300 00 ²	2 199 84	2 203 54	2 203 37	7 61	7.62	39 87	38 67	24 67	15 20 2		D	* 1 in 16+0	
2,400 00	2,394 70	2,438.35	2 404 99	8 27	8 29	39 71 39 51	39 71	73 65 23 66	15.62 .2 16.42 .2		.0	• 1 m 1€ • 0	
2,500 00	2 497 41	2,507.74	12,605 09	6.61	8 64	39.26	39 26	22:34	17.02 - 2		Ð.	+ turitEr#:	
2,500 57	2 595 20		2,604 00	8 97	9 00	35 99	38 59	21 32	17,00		. 6	< 1 m 1E-9	œ
2 500 00 2 700 00	2,565 62	2,708 09	2 604 42	8 97 ±	9 00	35 29	36 69	21,38	17.61-2		ď	< 1 m 18 · 8	
2.000.00	2 791 25	2,808 96	2,500 05	9.72	8 75	39 05	39 05	20 08	18 26 2 18 97 / 2	059	. C	4 1 m 16:0	
2,900,00	2,669 07	2,905 99	2 897 66	10 10	10,14	39 10	39.10	19 44	19 66 1		0	4 1 1 16-8	
3 100 00		3,008.99	2 (2)5 57	10 50	10 54	39.18	39 to	18 80	20 36 1		. 0	* 1 m 16-0	
3,200,00	3.084 70	3,108.96	3 093 46	10.51*	10.94	39 24 .	39 24 39 33	18 17. 17,55	21.07 1 21.78 1		(0)	* 1 m 16.9	
3,300,00	3 280 33	3,209 98 3,308 98 3,488 99	3,789 11	11)74	1.11.78	39 43	39 43	16 93	22.50°1	752		4.1 m 1E-8	
3 400 00	3,3/8 14		3,366.97	12 (6)	12 20	39.56	30 65	· 16 32	23 23 11	703	0'	< 1 in 1640?	
3 500 00 3 500 00	3,475.06		3 484 73	12 59	12 83	39 68	39 09	15.72	23.96		0	≤1 in tE-9	
3,700 00 :	3.573.77	3 503 97	3 582 55	13 93	13 05	39 83 39 97	26 82 39 97	15 12	24.70 1 25.45 1		8	4.1 m 1E-9	•
1,800 00	3769 40	3 505 97	3,778 17	19.90	13.94	43 14	40.14	13.94	25 70	512	0	*1 #15.9	V 12
3 900 110	3 867 22		3 876 98	14 35	14 39	40 37	40 32	13 37	26 56 1	496	(0)	e 1 m 16.9.	Level 3
4 100 00 4 100 00	3 965 03 4 062 84	4,008.90	3,973.70	14 80	14 54	40.51	40 51	12 79	27.72°1		÷0;	• 1 in 15-9	Level 3
4 200 00 4 200 00	4 160 66	4 204 95	4.0/1 61	15.75	15 79	40.72	40 72	12 23	28 49 1 29 77 1		0	* 1 m 1E-9 < 1 m 1E-9	Level 3 Level 3
4 300 00	4 256 47	4 306 03	4 207 23	16-15	15 19	41 16	41.10	11.11	30.06	370	G.	41 m 1E-0	Level 3
1,400 00	4 356 29	4 408 95	4 365 0	16 61	16 65	41,40	41,43	10 55	30 84 1		.g.	€1 m 1E-9	Level 3
4,500 00 4,500 00	4,454 10	4 508 95	4 100 87	17 072 17 53	17.11 17.57	41.65 41.91	41 85	10 01	31.64 1		D	* t in 1E-4	Level 3
1700 00	4 849 73	4 708 94	4 258 18.	17 99	10 04	41,93 42,18	42 18	6 167	33 26 1		ំង។ ខ:	4 1 m 1E-9	Level 3 Lines 3
4 800 00 4 900 00	4 747 55 4 845 38	a 800 B4	4 754 29	18 40	18.50	42 48	42 48	8 39	34 07 .1	246	10	* 1 m 16+9	Level 2
100	- Y - 1 - 1	4 908 64	4 854 10	18.92	18 97	42.76	42.78	7,86	34 90		0	ertin 16-9	Level 2
5,000 00 5 100 00	4,943,18 5,043,99	5,008 03 5,108 63	4.051.02	19 56	19 90	43 66 43 37	43 09	7.33 8.81	*35 73 1		÷0)	< 1 in 16 g	Level 2
5 200 DO	5 138 81	5 208 93	5 147 54	20 33	20 37	43 76	43 70	6 76	36 50 1 37,41 1 38 25	168	0	* 1 m 16+9	Lavel 2 Lavel 2
5 300 BO 5 400 DO	5 334 44	5,308 93	5,249 35	20 60 -	20 54 21 21	44 03	44 03 44 37	5 77	38 25	151	٥	eji in iE-9,	Lavel 2
3.00	4.34		3.0	2.37	1,000	4437	44.	5 26	39 11 1		90	41 m 15-9	Level 2
5,500 00 5 600 00	5 432 25 5 530 07	5 508 97	5,440 92	21 74 22 23	21.7b 22.26	45 00	44 72 ; 45 04	475	29 97 1 40 84 1		9	* 1 in 1E+9 . * 3 in 1E+9	Level 2
5,700.00	5 627 68	6 700 92	5,638 60	22 € 9	22 73	45.45	45 45	3.74	41.71.1	G50	o:	ert er tE+B	Level 2
5 800 00 5 900 00	5,725.70	5 508 91 5 608 91	5 734 41 5 832 23	23 16 23 84	23 21 23 55	45 53 45 32	45.63 45.22	3 24 2 74	42.55 1 43.47 1	078	70	4 tm 16+9	Level 2
000700	5,921 33	6 003 91	5 930 04	24 12	1200	Elitabeth Control	25.00	1965 A	33.77	15.0	0	< 1 m 1E(S	Lincel 2
5.100 00	8 019 14	6 108 90	0.027.65	24 12 24 59	24 63	46.61	46 61	2.25	45 36 1		0	<1 m 1E-8	Level 2

06/09/19, 9:33:27PM



Kal Co-ordinate Reference:

Via Co-ordinate Reference:

O Reference:

Province:

Including Method:

Input arras are et itabase:

has IVO Reference:

Including Method:

Itabase:

Including Method:

Itabase:

Itabase:

Including Method:

Itabase:

Well Goonch Fed Com 64 222H G GL 3013 8" + 25" KB @ 3038 80ust GL 3013 8" - 25" KB @ 3038 80ust Grid Grid Minimum Curvature

2.00 sigma HED_Compass_DSN Offset Datum

#1	Color and management of the last			Office Site Error: 0 00 us
				Office Wall Error: 0.00 Us
181	24.	er v	ADLIC ALLAS MI	
	Intram Separati			Warrung
usfi)	(mill)		ior 1	
A PROPERTY OF	THE RESERVE OF STREET			
			2 4 1 to 10 A	Level 2 Level 2
0.20	47 07 1 00d		4 3 in 16-9	Larvet 2.
0.19	48 68 0 936	Ö	≤ 1 in 15+9	Level 1
D 67		0	< 1 in 18-0	(Lgvel 1.
		.0	4.1 in 15-19	Level,1
1.52	51 65 : 0 969	· D	7 ≤ 1 in 15+9:	Lirent 11
2 09	52.58 0.960	0		Level 1
1223	63 09:0 956			Larger 1.
2 62	53 50 0 955			Lavet 1
1.2				Level 1
	55 17: 0 947		< 1 in 1E+9	Levet 12
	55 00 0 942		* 1 m 1E+B	Luvul 1
3 53 -	57 15 D 930		4 1 10 10 10	Lovel 1
421	37 43 0 927	ő	=1 m 1E+9	Lavel 1
V-1003		Ã		Sattle Cell 5
	01 /1 01922	ų e	v 1 m 1E+9	Lovel 1
5 70	59 92 : 0 803	ŏ	51 m 15-0	Level 1"
45 31	59 53 D 694	· g	4 1 in 1E+9	Livel 1
4 92	6D 14 D 865	o o	#.1 m 1E+5	Langer 1
7.53	80 74 D 974	à	2 m 15 m	Level 1
0.15	61 37 0 667	ě	1.1 et 1E-9	Litror 3"
10.77	61 99: 0 650	o.	* 1 In 1E+9	Level 1
	62 61 - 0 850	٥	- 1 m 15+9	Level 1
10 Q2	63 2410 642	D	4 1 m 1E+8	Livet 1
10 64	63 65 C 433	۵	4 1 m 16+9	Level 1
· ** 44 ***	64 40 D 625	Ö	* 1 in 16-9	Larvel 1
11.90	65 12 0 617	D	1 in 1E-0	Level 1
	65 75 0 609		1 up 1E+9	Level 1 ES SF
		_		Level 1 Es SF
11 83	66 DO , 0 819		4-1 m 16-9	Level 1
331	63 09 1 052		4 TW1 18+9	Level 2
	57 12 2 263		9.1 m 16+9	
73 24			4 1 pr 1E-9	
95 8 4			3777275-74	
09.50			e to the	
111 67	53 68 3 084		4,1 (0.15.45)	
124.22	52.50 . 3.386	0	* 1 m 1E-9	
136 04	51 40 3 642	ū	* 1 m 1E+9	
147 19	50 78 3 899	0	- 1 in 16-9	
156 53	49 49 4 208	0	s tip 1E-9	
160 18	48 44 4 492	0	< 1 in 15-9.	
160 13				
198 76	45 13 5 404		< iin t€+9	
207.26	44 45 5 550			
273 40	43 68 6 234	ů.	4 1 0 16 20	
4.4.4.45			- 1.7	
243 66				
243 70	39 31 7 354	0	4 1 87 16+9	
255 10	38 52 7 622	ű.	< 1 m 12+9	
259 66	37.96 7.836	ġ.	4 I in IE-9	
263.77	37,41, 8 051	0	r in iE-S	
267,16	37.08 - 5.305	9	< 1 m 1E-8	
270 23	36 51 6 400	٥.	< 1 m 16-0	
	38 11 8 551			
対策を基本	22,765,073	ū	4.1 m 1E 9	
275 45	35 81 B 6072	a.	< 1 m 1E+9	
275 97	35 78 9 714	4.0	4 Tet 1E-9	
	1000年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年,1200年 1200年,			

Hawkeye Directional Anticollision Risk Report



Company:
Project
Reference Site:
SEC 4 - 1238 - R28E
Site Error:
Goanch Fed Com 04 222H
Weill Error:
Goanch Fed Com 04 222H
Weill Error:
Reference Wellson 4.
Reference Wellson 4.
Reference Wellson 4.
Reference Wellson 4.

Local Co-ordinate Reference.

Well Goorden Feel Com
(TWO Reference)

SuD Reference:

GL 3013.8 - 25 KB @
(GL 3013.8 - 25 KB @
(Glid

Survey Calculation Method:

Output errors are at ...

Output errors are at ...

Database:

GHED, Compass, DSN

Offset TVD Reference.

Offset Datum

Well Gooneh Fed Com 06: 2221 GL 3013.8' • 25' KB @ 3038 Boust GL 3013.6 • 25' KB @ 3038 Boust Glid

	HISEL DES	sign	SEC 4	T235 - R	28E - Goor	ch Fed	Com 04 132	H - OH - PI	an #1					Office San Error.	1 00 us
5	urvey Progr	em) - 0 W	no w				100	578000					STATE OF STREET	Officet Well Error:	0.00 141
	Helele	in a	Offe		Samu Major	ALD I	Batasan	DH	erice				ed Prototoky	Selection of	i Ind
	Depta 🔐	Cleptin	OvpD:	C)epth			Cartres	Dotanca	Elismas	Milphagn Beperation	Boper	tion Risi	ed Till Protestality	Marning E	
1	Unit	, (vst) (s)	(usfi)	(Us(T))	Reference (staff)	(Indi)	outu 🖰	(frant)	(Ven)	(Ush)	學繼	### P*			
	. 0.975 00 \	9 644 40	0.602.07	9,337.01	36.05	134 SB	5,311 71	311.71.	275 49	35 61	8 703	9	< 1 at 1E-9	Signature and the state of the	
1	10 000 00	9,646 27	9,675.00	9,335 11	355 81 35 89	34 96 34 94	310 59	311 19	275.18		8 642		t in tE-9		
l j	10,040 94	9 647 39	0,705 44	9.33993	35 84	100000	12211	310.58 300.82	274 49 273 27		8 504	0	41 m 1649		
		9 648 25	0,753.35	9,340 00	25 7B	34.65	310.55	310 55	273 64	38 61	0 414	6	1 in 16-3		
1				0,340,00	(3675)	,.54 10.	1,414,411	212 21			6363	ď	Get miles		
	10 300 00	9,659 49		9,340.00	25 75	34.75	313.60	วเรื่อล	276 06		8 300	ű.	# 1 in 16:9;		
	10 500 00	9 655 23			35 85	34 51 34 95	317 22	319 55	277.18		0.225 0.135	8	4:1 m 18:0		
1	10,600 00 :	9,656 98	10,253 24	9,340.00	35 70	35 18	31850	312 00	279 36		9 0 45	b.	(1 in 1E+9)		
1	10,700 00	9 658 72	10,353 24,	0.340.00	36 60	25,47	320 57	320.57	280 22	-10 35	756	Ö	4.1 of 1E ig		
			10,453 23		36 93	35 54	322 23	322 25	281 14		7 830	à	, € 1 m 1E-9		
	10 000 00		10,653 21	9.340.00	37 45 37 98	36 28 36 79	323 63 325 63	373 93	282 Gt		1.725	g;	<3 in 1E-9		
		9,665,70	10,753 17	9.340.00		-36 / N	327.30	325 63 327 30	262 64		7 611 7 494	a.	, 4.1 in 16+2 (4.1 in 16+2		
			10,853.15		39 23	36 01	326 99	320 99	284 38		7 375	å!	- 1 m 1E-9		
	11,300 00 5	0,685 19	10,953 14	0 340 00	339 94	36 70	330 68	330 68	265.10	45.58	7.256	à [:]	* 1 m 1E-5		
	11,400 00	9,670 94	11.053.12	9 340 00	40 70	33 48	312 36	332 38	285 79	48 58	7,135	0	4 ten (E-9		
	11,500.00	9,672 68	11,153.10	9 340 00	41 52,	40.27	334 07 335 77	334 07			7016	o.	14.1 m 16.3		
	11,700 00.		11 353 07		43.29	42 03		335 77. 337 47	287.70 287.70		6 855 6 781	0	4.1 m 1E-0		
1	11.800.00	19.677.99	11:463 05			42.98	239.177	339,17:				•	4 tan 18 2		
	11,900 00	9.679.66	11,553 (0)	9,340.90	45 24	43.57	340 67	340 a7	206 25 256 65		6 565 6 542	a a	- 1 an 12 - 9 :		
		9,681,41	11 653 01	8 340 00	46 27	45 00	342.57	342 57	289 39	53 15	8-441	Q:	* 1 m 1E-9		
	12,100.00	9 083 16	11,752 99	0 340 UO	43,34	48 07	344 28	344 28	209 92		6 333 .,	U.	• 1 m t6 9 ;		
	- A	31 Tel 137	11 852 68		48 43,	47, 17	345 99	3-15 99	290 43	74,	9 227	ĝ,	< 1 m 1€+9		
	12,400.00	9,636,65	12,052,96		49 56 50 72	43 30	347.70 .	347,70	299 92 291 39		6 123	:0'	<1 m 18-9		
1 1	12 500 00	5 650 14	12,152.92		51 91	50 65	351 13	351,13	291.86		5 924	0	< 1 a) 16+0 < 1 a) 16+0		
		9 691 68	12,252 91.		53.12	51 66	352 84	352 64	292 31		5 è 29	Q.	atm t@.ur		
	12 700 00	1.000	12,352 50	443.7	54 3n	53.10	354 56	354 50	292 75	61 61	5730	0	€ 1 an 1E+0		
	12 800 00		12,452,87	9 340 00	55 60	5-25		396 28	293 17		5 646	0	en materia		
1 3	13,000,00	9,607,12 9,508.86	12,552 65	9,340.00	56 88	55 63 56 63	359 72	358 00 359 72	293 69 294 00		5 558 5 473	lo lo	* 1 m 1E+9		
		0.700 61	12,752 82	9,340,00	50 48	56 25		361 44	294.39		5 390	D	* 1 an 1E+9 - * 1 an 1E+9		
1	13 700 00	0,702.35	12,852.50	0,340.00	60 61	59 56	363.17	363 17	254 78		5 210	- O	1 In 15-9		
		9 704 10	12,552,78	9 340 00	52,16	60.93		364.90	295 16		5 232	F Q:	5,1 m 1E+9.1		
		0.7tm 6-1	13,052.76	0.340.00	03 53	62 29	356 63	360 63	285 53	71.05	5 157	ŧo:	01 m 1E+9		
	13,500 00		13 752 75	(9.340 co	64 88 :	63 65		366 36	295 96 256 26		5 0B4	0	*1 m 1E-8		
	13 780 00		13 352 71		67.68	156 45	371.82	371.82	296 51.		4944	0	* 1 m 16+9		
b. 7	13 800 00	9,712,82	12,452 69	0.247.00	69 07	67 67	373 56	373.56	296 95	X539	4 677	- (} • B	× 1 in 1€+5		
. 1	13.500 00	971457	13 552 67	9 340 00	70.49	100 79	375 29	375 79	297 29		4 812	ō	1 in (E) 9		
	14 000 00 14 100 00	971631	12,652,66	9,340 CB 0,340 CD	71.92	20 12	377 03	377 03	297 63	78 40	4748	12	r₁m (£+s.		
	14 100 OD		13 852 67	9 340 00	73 35 74 80 2	72.19		376 77. 360 51			4 557	0	* 1 m 16+0		
١,	14 300 00	0.721.55			76 25	75 97	342.75	0.100	10 d 1 ft 70				- 1. Table		
	14 400 00	9 723 3D	13 952 60 14 053 59	9.340.00	76.77	76 54		382 25 384 00	264 50 264 92		4570	0	• 1 m 1E-9		
	14,500.00	9 725 04	14 152 57	9 340 00	79 18	76 01	325.74	385,74	299 23	66 51,	450	0 0	e 1 m 16+0		
	1 4 500 00	8726.79	14 252 85		60 60	79 49		387 45		87,95	4 400	D	1 m 1E+9		
	14 700 00	9,750,63	14,352 60		62.14	80.58		389 23		189.39		703	* 1 Ri (E-97		
1 4	14,725 65	9,729.00	14,379 38	9,340.00	82.50	51.36	393 70	389 70 ;	290 67	es 7a	4 341	0	4.1 ef t#49		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation Page 8



ocal Co-ordinate Reference;
70 Reference;
70 Reference;
70 Reference;
70 Reference;
71 Reference;
71 Reference;
71 Reference;
71 Reference;
71 Reference;
71 Reference;
72 Reference;
72 Reference; Well Goonch Fed Com 04 222H GL 3013.8 + 25 KB @ 3038 80ush GL 3013.8 + 25 KB @ 3038 80ush Grid

Minimum Curvature
2.00 sigma
HED_Compass_DSN
Offset Oatum

	#1		at the	Offset Site Error (0 0	
ant					1
	Ekipas e B	dinimum (Aeparati eporation (Factor		ked Probability Visining	
1	(usft)	eporation of actor (usit) = 1 = 1	Pa	ration 3 of Callisian (1994) 1 2 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	T.
ğ			D	e, t in. 16:9	agentife to
į.	100 07	0 27 740 724 0 99 202 857 1,70 117 533	0	4 1 m 1E-9	
	196 53	170 117 533	0	≼र्त के उद्दर्भ ≪ १ के उद्दर्भ	
ě.	197,92	2 42 62 734	o.	4 1 m 1€₁0	
100	11 10 1000	3 14 63 834	0.	< 1 in 1€+8	
1 377.44.5	199 45;	3 86 51 964 4 57 43 616	0	et in tie-B	
	195 77	5 29 : 37 677	0.	e. î. n. 15+0 e. î. n. 15+0	
	194 33 183 62	5 29 ; 37 677 0 01 ; 33 365	0	€ 1 in 1E+9	
3	103 62	6/72 29 768	o.	(j.m. 15-0	
ŝ	192 90	7 44 25 027	0.7	<1m16-9	
à.	192.18	8 16 24 500 8 57 22 576	0	e.1 en 1E+9 - e1 en 1E+9	
The second	190 75 1	9 57 20 68a (10 31 19 436	, o	-101E-9	
1	190 03	10.31 19 436	O	· Tim TE-SI	
	3189 31 168 60	11 03 ; 18 172 11 74: 17 062	0	Nation (Esp	
1	187 88	11 74: 17 062 13 46 18 080 13 18 16 208 13 29 15 070	0	41 in 15-9 41 in 16-9	
	167 16	13 18 16 205	10.	<.tm 16-9	
ŀ	187.05	13 29 15 070	o.	• 1 in 12-9 CC	
3	-186 45	13 89 14 423 14 57 13 785	0	/ s.1 in 16+6	
	186 26 187 08	15 21 13 297	0	v i in 15+0 √E8 s i in 15+9	
	188 02	15 66 12 903	o	< 1 in 1E+B	
	101 53	16 53 12 590	0	ุริวัยก์18-8 วิริวัยก์16-9	
÷	195 18 199 75	17 20 17 345	0	<1 m,18÷9	
e e	199 75 204 86	17 91 - 12 156 18 64 - 11 668 19 39 - 11 819	0	<1m1E-9 <1m1E-9	
	\$209 83	19 39 11 619	°o	- 1 in 16+9	
,	214 83	20 17 11 651	b	<1m1E-0	
	219 83	20 56 11 447	ĵu .	15 Tin 1E-9	
	224 80 229 77	21,77 71,327	0	e 1 in 16+9	
	234 72	22 59 11 171 23 42 11 020 24 27 10 575		4 1 m 1E-0 4 1 m 1E-0	
	235 66		ó	* 1 in 1E+9	
	244.58	25 12 10 736 25 08 10 607 26 00 10 474	Ü	- 1 in 1€;b	
	749 51 754 42	25 08 10 607	0	5 kg 1 df 18 kg	
	259 32	27 73 10 350	a	्रोली69 रोजी69	
	26122	27 73 10 350 28 67 10 733	á	*1 m 1E+9	
	260 12		ó	× 1 m 1E+9	
		29 51 10 120 30 41 10 012	O	4 1 m tE-9	
	275 80 283 77	31 31 9 908 32 21 9 809	0	- 1 m 12-9 - 1 m 12-9	
	268 64	33 12 9714	ō	4×1 m.1E-P	
	293.51	34.04 0.673		*1 m 1E+8-	
	296 33	34 95 9 536	B	- 1 m 1€+9	
	308 10	34 05 9 536 35 86 9 452 36 80 9 372	0	4.1 m 1E+9 4.1 m 1E+9	
	312 05	37,73, 9 295	0	1016.8	
	317,81	38 66 0 223	o	(5.1 m 1E/0)	
	322.66	39 59 9 151	0	<1 m 10+9	
	327.51	40 52 9 082 41 46 8 017	Q Q	< 1 m 1E-3 < 1 m 1E-9	
	337.21	42 40 8 954	ő	* 1 on 1E - 9	
	342 05	43.34 8.893	0	A 1 in 1E-B	
	340 90	44 28 6 835	Ö	,4.1 in 1E+9:	
	351.74 350 58	45 22 6 778 46 17 8 724	0	76 1 in 1F+6	
	381 41	47.11 8.724 47.11 8.671	9	* 1 m 1E-0 * 1 m 1E-9	
	360 25	46 06 B 021	0	61 to 1E-9	
	371 09	49 01 6 572	ŭ	C101E-9	

Hawkeye Directional Anticollision Risk Report



GL 3013.8" + 25" KB @ 3038.80usft GL 3013.8" + 25" KB @ 3038.80usft Grid Minimum Curvature

ffset De	sign 🕍	SEC 4	T23S - R2	BE - Goons	h Fed C	om 04 211H	- OH - Pla	n #1	7 7 7 7 7		•	Offices Side Error: 0000 cm
avey Progr	am. D.MV	0		M. M.					Minimum Separa Separation Factor			Offeet Well Error: 000 us
ensured **	Vertical Depth	Beauted .	Vertical	Reference (unit)	Offset	Setween	Yearl Plant	Saturan	Minimum Separa	lon Rs	ted Probability	Waterne
(unit)	Cuatte C	(uell) ((ust)	(mrg)	(unit)	(usft)	(tent)	(uutii	(CLR)	5	ration of Collision for	
0.200.00	11 110 33	0.787.18	5/104 42	25 07	25 02	425 88	425 68	375 02	49 55 8 525	d d	< 1 et 1E-0	
6 400 00	6,214.77 6,312.58	5,287,01 6,386,65	6 202 07	25 55 25 03	25 50	431,55	431 66	380.75	50 91 8 479	Ó	14 1 of 1E+8	
6,500 DO	6 410 40	5,486 58	6.397.37	25 01	25 98 26 45	437 45	437.45	385 56	51 06 8 435 52 82 8 382	e e	* 1 m 16+5 * 1 m 16+6	
6,600,00	5,508 21	9,586 51	6,495 02	26 98	26 93	419 02	440 02	393 25	53 77 6 331	ă	5 1 m 1E-S	
6,700 00	6 500 03	6,686 3 1	8,502.87	27 47	27,41	454 60	454 80	400 08	64 73 , 8 311	o	<1 m 1€+9	
	9 703 64	5.756 18	6 650 12	27.93	27 8S	-60 SD	460 53	404 90	55 66 6 272	ū	< 1 m 16+9	
6 900 00 6 855 00	6 801 64 6 836 43	6,856 01 8,940 02	6 /8/ 97 6 841 85	28 43 28 59	28 37 25 54	409 55	466 37	409.72	Se 64 8 234	ā	41 m 1E+6	
7,000 Du	6,899 54	6,565 64	6,865.62	28 50	26 85	472 11	472 11	414 52	57,16 8 214 57 59 8 187	è	< 1 er 18-9	
7,100 00	B 997 99	7,005 64	6 983 24	7.29.34	29 33	477 43	477.45	410 06	10 52 8 159	ō	4 1 m 10-9	
7,250 00	7,056 89	7 100 89	7 682 39	.29.78	20 62	437.40	492 40	422 98	59 42 8 116	0	. €1.m 18+6	
7,400 00	7,196 42	7,289 60	7, 183 59	30.18	36 26	486 49	456 46	120 21	50 26 8 071	õ	* 1 m 15-0	
7,500 00	7,296 15 7,396 08	7,392.01	7,285 94 7,388 40	30 54 30 67	30 71 31 11	469 60 : -91 97	491 92	423 59	61 07 8 019	Ď	· < 1 m 1E+9	
7,556.00	7,451 (78)	7,552.80	7,445.17	31 04	31 31	492 78	491 92 492 78	430 13 130 82	61 79 7 961 62 15 7 9.20	o o	4 1 m 1E+9	
7,600,00	7 496 08	7,599 45	7 491 75	31.18	31 48	493 29	493 29	200	5 S.A. 7 S.S.	77	1.0.0000000	
7,700 00	7,595 08	7,703.31	7,505.57	31 44	31.61	- 33 Z	493.69	430 85 430 84	62 44 7 900 63 06 7 834	à	< 1 m 16+8	
7,800 00	7,698 08	T,804 32	7,698 56	31.72	32 10	493 91	493.91	1430 30	63 62 7 764	G.	1 m 18 - 9	
7,900 00 8,000 00	7,798 08 7,896 08	1,904 32 8,004 32	7,790 58	32 01	32,38 32,65	493 91	493 91 433 81	429 73 429 16	64 18 7 596	Ċ.	+ 1 m 1€+9	
8 100 00	7,996 08		1.4.55						64.75 7 678	9	1 on 15+0	
8 300 CO	8.006.08	8,104 32 8 204 32	7,996 58 4,006 58	32 58 32 67	32 95 33 23	(43) 91 (83) 91	493 91 493 91	428 59 428 02	65 52 7 561 65 50 7 496	8	<1 m 16-9	
8 300 po	8 195 087	8,304 32	8 156 56	33 16.	33 52	433 51	493 91	427 44	35 47 7 430	0	< 1 m 18+9	
8,400,00	8,209 08	8 404 32	8 299 58	33 45	33 60	453 91	453 91	426 Bu	67.05 7.366	a	4 1 m 1E+9	
8 560 00	80 080,8	8 504 32	9,396.88	33 /4	31,03	-593.91	493 01	426 26	67.63 7,393	Q.	* 1 m 12:9	
8.600 00	8,458 Q8	6,604 32	8,496 55	34 03	34 36	493 01	433 91	425 70	60 22 7 240	ő	4 1 m 1E+B	
6.790 00 # 200 00	8,500 OB :	8,704 32 8,804 32	8,596.56	34 33	34 67	493 91	493 91	425,11	68 61 7.178	8	« 1 m (E-9	
1 900 00	8 795 Of	6.604.32	6,79656	34 82	34 97 33 28	493 91	430 91 493 91	424 52 423 93	69 40 7,117 69 86 17 057	9- 0	* 1 th 16+9	·
a con on -	60 625 C	9 504 32	a 1901.58	25 22	35 56	493 91	493 91	423 33	70 58 6 998	a	<1 in 16.9	
9,100.00	(8,996.08)	9,104.32	8 966 56	35 52	35.85	493 91	493.01	422.74	71.18 6.939	9	4 1 m 1€+0	
9,103 85	8.640 93	0,10a 17.	2 000 43	35 53	25 80	433.91	493.51	472.71	71 20 6 937	Q;	1 m 1E19	
9 273 30	9,096,06	9 202 27 9 269 73	9,093 92	35 62	35.09	495 CQ	494 05	422.34	71.74 6 587	C	(* 1 in:16-9	
9 275 00	9.171 025	9 271 23	9 158 94 9 160 35	36 94	36 19	495 04	495 00 495 94	422 92 422 93	72 Od 6 860 72 Od 6 856	์ อั;	(*1 m 1E+9	
9 300 00	0E:196 07		29.18091	5361120	30.25	495 65	495.65	423 48				
9 325 00	9,720.95	931472	9 700 82	36 18	36 23	436 35	496 13	424.13	72.10 8 858 73.22 8 872	0	(* 1 m 1E+9)	
9,350,00	9.245.75	9,338 05	219 70°	36 24	36.24	497.14	497,14	424 89	72 29 6 830	o.	€ 1 m 1€-9	
0 375 00 1 0 400 00	9.270 31 9.294 60	9,357,33	9,235 50 9,254 14	36 29	36 25	498 DO	498 00	455 73	73.27 6 601	6	<1 m 1E-9	
	1.0	100	14	60.0	38 25	425 92	496 92	425 67	77.26 6 905	ġ.	a in (E-E)	
9,425 00 8 450 00	9 318 54		0.289 63	36 36 36 39	36 25	489 90 500 92	459 90 100 92	427 57	72 23 4 921	D.	CliniEi9	
9,475 00	0.365 13			35 42	36 23	501 07	501 97	429.78 429.50	72 15 - 6 542 72 07 6 965	. 6:	41 m 15-8	
9,500 00	9 387 58	9 456 27	0,320.51	36 43	36 22	503 03	503 00	431 07,	71.90-6.900	ō.	4.1 m 1E16	
0,525 00 4	9,400 58	9,479 15	9 538 27	36 44	36 20	504 11	504 11	432 27	71 84 7 017	0	< 1 m 16+9 (
9,550 00	9,430 65	9,500,00	9 3 19 63	36 44	30 15	505 18	\$05.18	433,46	71,70 7,046	(4 0)	5.f at 16.93	
9.575.00	9,451,40	9.518.40	9.362.15	36 44	36 16	576 23	508 23	434 FO	71 53 7 077	. 0	4 1 m 18 9	
9 600 00 9 625 00	9 490 13	0.537,90 - 0.537,23	9,37450	35 43 36 47	36 13	507.26 568.26	507.26 506.20	435 91	71.35 7.109 71.17 7.142	0	*.1 m 1E-9	
	9,508 20	9 537 23 9 575 00	9 396 48	36 40	36 08	509 72	519 22	435 20	70.65 7 177	ä	< 1 et 36+9;	
9.67500	0 525 34	9.595 55	0.407.61	25 38	36 05	510.11	510 11	439 35	70 76 . 7 205	4	< 3 m (E+9)	
9,700 OU.	9 541 50	9 614 57	9 417 23 2	30.35	30 02	510 95	510 95	440 40	70 56 7 243	0	4 1 in 16-9	
9,715.00	9,556 65	6 633 49	9 420 6	38 33	30 99	211.72	\$11.72	441.37	TO 35 7 274	O.	1 in 16-6	
9,750 00 9,775 00	9,670 74	9 650 CQ		36 30 36 27	35 96	512 42	512 42	442 30	70 12 7 308 69 94 7 335	o.	Cim te	
								a line one	water area		1 in 1E+9	
9 825 00	9,565 57 9,606 25	9 689 64 9 70a 50	9,44871	36 23	35 89 35 86	513 54 513 97	513 54 513 97	443 60	69 74 7 364	U	* 1 in 1E-19	
9 650 D0	B.615 73	9,725 00	9 459 65	36 15	35.62	514 29	513 97 514 39	444 93	69 55 ; 7 389 99 37 7 414	0	4 1 m 16+0 . 4 1 m 16+0 .	
9 675 00	9,623 99	9,725 00 9,735 69	9 46-193	36 11	35 79	514 51	514 51	445 20	69 22 7 433	0	41 m 16+9	
9 950 00	8 631 03	9,764.21	9 404.91	36 07	35.75	514 62	514 62	445 50	69 07 7 451	.0.	1 m 16-0	
9 925 00	9 536 70	9,782 71	9,47219	36 63	35.71	514 62	514 52	445 69	106 94 7 465	o í	4.1 m 1E+9	
6.950 pg	0.641.22	9.600.00	5 47481	39 99	35 6H	51451	514 51	445 60	69 62 7 476	ES - min e	< 1 in 16.9	

CC - Min centre to center distance or covergent point; SF - min separation factor; ES* min etipse separation | Page 10.

06/08/19 9:33:27PM

· COMPASS 5000 15 Build 91



Cal Co-ardinate Reference:

Cal Co-ardinate Reference:

Cal Co-ardinate Reference:

Cal Co ardinate Reference:

Ca

-	-			terralisiikoonaas		er a south to the tip	
Ple	n #1	onersanone en	Maniellia y		position P	itte Error:	0.00 usm
his		《并必题》		4 14 2 2	Offset F	veli Error:	O DO USE
	Salwer .	Minimum Separat	lices (Ua	ked Protectivity	12-2-2	Wattiling	
	SEIDING	Seperation Facts	n gehr	ration of Collection			
15.5	(Mass)	(Usfl)		tor y	as Kh	X	
29	445 56	66 73 7.483	0	e 1 in 1E+9			m-r-er, - uncome:
10	445 29 445 03	68 05 - 7 456	Œ.	< 1 in 16+5			
12	444 22	68 40 7 496	0	4 1 81 1E-9 4 1 m 1E-9			
12	443 17	68 25 / 4lia	в.	4 1 in 16.9			
33	441 68	GB 25 - 7 470	0	* 1 m 1E-0			
34	440 65	68 39 7-49	g.	< 1 m 1E • 9			
37	439 19	68 68 · 7 395	D.	< 1 m 15-15			
95	437,61 435,69	69 10 : 7,333 66 67 7 257	0	<.1 m 16-0			
12	434 05	70 36 7,169	0.	4 1 in 1E 91			
ta:	432 10	71 10 7 870	91	* 1 m 1E 19			
16	432 10	71 18 7 870 72 13 6 982	a a	5 1 m 1E-9:			
15	427.87	73.18 8 646	ü	< 1 or 1E+9			
15	425 60	74 35 6 724	₫.	< 1 m 16+0			
16	423 24	75 63 8 556	÷ 0	1.6 15-9			
g.	420.79	77 DJ R 405	o	< 1 m 1E-9			
2	415 26	78 46 6 331	0	4 1 m tE+B			
15	412.66 412.68	60 00 6 100 81 62 6 060	0 0	< 1 m 18+9 < 1 m 16+0			
18	110 25	83 32 : 5.924	G.	< 1 m 16-8			
	AD7 48	85 UB , 5 789	ě	e i m 15+0			
8	407 46 404 64	66 81 5 656	10	4.1 m 15+0			
	401.76	88 79 . 5 525	. 0	< 1 to 1E+B			
•6	398 B3	90 77 5 96	8	0.1 m 1E+0			
ð	382 87	92,71 6 270	-, 05	• 1 m 16-9			
6	392 86	94 73 - 5 147	Ó	* 1 in 18+9			
6	389 80	96 80 5 028	n	.c1 in 1E+8			
9	383.75	101 03 .4 75a	e D	≤ 1 m 16+9 < 1 m 16+9			
17	380 67	103 19 4 669	0	< 1 m 1⊞•9			
16	377.57	105 38 4 583	úg.	4.1 m 1E-9			
85	374 47	107,60 4 460	.0	< 1 in 1E+9			
B	371.35	109 83 4 381	- 0	4 1 to 16 • 9			
11	368 23	112 05 4 285	0	< 1 m 1E+8			
15		114 35 4 193	D	1 m 1E-9			
0	361.97	116 63 4 104	0	< 1 m 1E+9			
6	358.84	116 93 4 017,	0	<.1 m 1E+0 + 1 m 1E+0			
٥.	352 50	123 54 , 3 854	6 D 1	4 1 in 15.9)			
3	345 47	125 65 3 777	0	* 1 m 16+0			
4:	- 349.36	128.19/3792	300	≤ 1 m 16+9			
1,	343 25	130 62 3 630	, D	4.1 m 12+3			
5	340,16	132 85 3 560 135 19 3 493	.b	* 1 m 18i9			
3	334 01	137 52 3 479		4 1 m 16+8 4 1 m 16+9			
3	330 95	产支充的数据的					
	327.81	139 85 1 356	0	* 1 or 15+9 * 1 or 15+9			
9	324 88	144 52 3 248	. 0	€ 1 en 1€+9			
1	121 87	149 84 3 192	0<	4.1 in 1E+9			
3	321 35	147.26 3.182	0	• 1 m 1E-9			
1	321.18	147.61 3 177	0	4.1 m 1E+9	SF		

nt SF - min separation factor, ES - min ellipse separation

COMPASS 5000 15 Build 91

Hawkeye Directional Anticollision Risk Report

Company:

Novo Oil & Gas, LLC

Protect

Reference Site:

Site Error:

JEC 4- 17235- R28E

Site Error:

JEC 4- 17235- R28E

Site Error:

JEC 4- 17235- R28E

Oo0

Goonch Fed Cam 04 222H

Well Error:

Well Error:

Well Error:

Heference Wellbore

JOH

Reference Wellbore

JOH

Reference Design 1- Plan #1

Local Co-ordinate Reference:
TVO Reference:
MD, Reference:
Autrey Calculation Method:
Output errors are all
Database:
Offset TVD Reference:

Well Goonch Fed Com 04 222H. GL 3013 6 + 25 KB @ 3038 80ush GL 3013 8 + 25 KB @ 3038 80ush GL 9013.8 + 25 KB @
Grid
Minimum Curvature
2.00 sigma
HED_Compass_DSN
Offset Datum

wvey Prog	ramil a G til	OFFE	Personal Property	28E • Goon		F & 14 7.30	以上,	100		 E-1, 18,18		Offset Size Egroc's 0.00
April	ence	Oma	4	Beer Major	Latin .		Onta	nce	100	179-78		Other Ske Error: 00 Other Well Error: 00 Warning
les sured Depth	Veruesi Cepth	Depth #15	Depth	Reference	Officel	Between	Wall-Wall	Elicones B	Aintneam Beparat	ion Rist	ed Probability	eninten.
(asl1) =	[usb] .y	(ueft)	(henft)	Reference (usf)	(traff)	(iven)	(usff)	(wait) ja 💘	(ush) [s s			
0.00	.000				0.00	20 00	20 00	***************************************		0	4.1 m.1E-9	West exercises that the resident
200 00	100 00	100 60	106 50	0 13	G 14	29 00	20 00	19 73	0 27 : 73 613	:0	< 1 m 1E+9	
300 08	200 DG	300 90 300 90	300 ac 300 ac	0.49	D 53	20 00	20 00	18 30	0 99 20 232	o.	431 at 1849	
400 00	400 00	400 80		1.21	121	20 00	30 00	17,56	1.71 .11.727 2.42 6.257	0	4.1 m 1E+9	
500 00	5C0 D0	540 60	200 50	1 57	1,57	2000	20 00	-15 85	3.14 6.371	Ď.	€1 at 1E+9 •1 at 1E+9	
600 00	600.00	600 80	600 80	193	1.99	20 00	20 00					
700 00	700 00	700 60	700 10		7 29	20 00	20 00	16 15	3 80 5 167 4 67: 4 374	0	€ 1 m 16+9 € 1 m 16+9	
800 00	(HOLD DO)	600 80	03 005	2 26 ° 2 64	265	20 00	20 00	14 71	5 29 3 76:	io.	4.1 m 15+9	
1700 00	900 000	900 80	900 50	3 00	201	20 00	20 00	13 93	501: 3 333	0	<1m1€-9	
1,000,00	1,000,00	1,000 HD	1,000 60	3 36	3 38	20 00	20 00	13.26	6 77, 2 875;	0	4.1 m 1€+9	
1,100.00	1:100:00	(1,100 80)	11,100.00	372	3 72	20 00	20 00	12 56	7,44 2,685	e o	4.1 m 16.0	
1,200 00	1,200 00	1,200,80	1,200 60	404.	4 08	20 00	20 00	11.84	8 19 2 452	0	* 1 in 1E+3	
1,300 00	1,300 00	1,300 60	1,300 80	4 44	4 44	20 00	20 00	11.33	8 88 2 254	0.	e 1 m 1E+9	
1,400 00	1,400 00	1,400 80	1.400 to	4 79	4 80	20 00	22 06	10 41	9 59 7 085	0	e 1 m 16 - 0	
1,500 00	1,500 00	1,500 80		5 15	5,16	30.00	20'00	8 65	10 31 1 040	0	<.1 m 1€+0	
1,600.00	1,600,00	1,600 80		5.51	5,513	30 00	20.00	8.08	11:03 7 814	- 0.2	€ 1 m 12+9	
1,700 00	1,700 00	1,700 20	1,700 80	5 67	5 67	20 00	20 00	4 26	11 74 1 703:	:01	€ 3 m 1€+#	
1,800 00	1,600,00	1,800 80	1,000,60	6 23	0 23	20 00	20 00	7.54	12 48 1 505	(0	4.1 m 12-9	
2,000,00	1,000 00	1,500 80 2,000 81	1,900 80 2,000 81	6 5 5 5	0.53	20 00	20 00	6 53	13 18 31 516	0.	* 1 in 1E-9	1.5 (44.5)
But all as	200	A	P. 13.	8.95	630	20 00	20 00	6 11	13.53 (440)	G.	1 in 1549	Level 3
2,011.33	2,011 33	2,012.21	2.012.21	6 98	6.99	20.00	20 00	4.03	313 975 1 432 ;	a.	1 in 1649	illeres s (CC)
2,100 00	2,090 08	2,301.45	2,101,43	7 29 7 81	7.29	20 10	20,10	5 53	14 57, 1 379	g.	≤ 1 m 1€+9	Level 3
2,300,00	2 199 84 2 799 45	2,202 68 2,302 66	2,201,91	781	7 62	20 64	20.54	5 23	15 21 (1 351 /	a.	< 1 m 1€+9	Liver 3 , ES SF
2,400 00	2,398 70	2,403 18	2, X/2 10		7 95	23,57	21 57	5 73	15 64 1 302	0	4 fm 1E+9	Level 3
er eric	200	Settle 1	2,401.85	(8.37	5.29	23 56	23.56	7.07	16 49 1 429	ō	61 m 12-9	Level 3
2,500,00	2 497 47	2,503 62	2,501 03	6.61	6.23	26 81	20 B1	964	17 17 11 562	.0	: 91 m.tE+9	
2,700.00	2,563 62	2 603 93	2,509 47	8.97	9 63	31 49	31 49	13 61	17 86 1 761	0	s tan i Erg	
2,800 00	2,791,25	2,703 09	2,697.05	9 34 9 72	9 36	37,19 43,24	37,19 3 43,24	10 56 23 84	18 60 1 993	0	14.1 th 18+9	
2,500 00	2,089 07	2 903 22	2,692.72	10.10	10.13	40.40	49.49	29 32	20 16 2 453	g.	*1 in 1E+9	
					10.53		1.74.	100	· 分配的基础 (1923)	25	9709000	
3 000 00	2,986 88 3,084 70	3,002.09	2,589 50	10.50		65 89	55 83	34 92	20 97 . 2 685 .	a	• 1 m 1E-9	
3,200,00	3,182 51	3,102 /5	3 087 39	10 51	10.94	62.36 68.95	62 39 E	40 60	21 78 2 864 . 22 61 3 050 -	o o	* 1 in 18+9	
3 300 00	3,250.33	3.307.78	3.282.58	11.74	11.77	75.57	75 57	52 13	23 44 3 224	0	< 1 m 1E+5	
3,400 00	3.370 14	3,402.05	3,380 14	32,16	12 20	82,23	62.23	57 95	2/129 (3.385	0	1 in 1E-9	
3,500,00	3,475 99	3,501 61	3,477,73	12:59	12 63	ba 92	80 92	83 78			Mar Mary Ave	
3 600 00	3,573 77	3,501,57	3 57 5 31	13 03	13 06	65 92 65 63	60 92 93 63	83.78 59.93	25 14 3 537 26 00 3 678	0	1 in 16:5	
3,700.00	3.871.50	3,701.34	3,672 89	13 46	13 50	102 36	102.36	75 40	26 57 3 800	8	1 10 15-9	
3 600 00	3,709 40	3,831,10	3,770 48	13 50	13 94	109 11	109 11	81 36	27.75 1.932	Ö	4 1 m 16-9	
3,000 00	3 867 22	3 900 87	30.835 E	14 35	14 36	119 87	115 87	67 23	29 64 4 046	· C	< 1 m 1E+9	
4,000.00	3.965 D3	4,000 (5)	3 965 65	14 60	14 83	122 64	122 64	93 12	29 52 74 193	6	4 1 m 1E+9	
4 (00 00	1 082 84	4 100 41	4 563 23	15 25	15 25	129.43	129.43	89 00	30 42 4 254	ő	0 1 at 1E-9	
4 200 00	1,150 66	4 200 16	4 160 02	15 70	573	130 21	136 71	184 89	31 33 4348	ő	4 in E-8	
4 300 00	4 258 47	1,799 93	4 258 40	16 15	16.19	143 01	143 01	110 78	32 23 4 437	ō	< 1 m 1E-9	
4 400 00	4 358 29	4 300 60	4,355.99	18 61	16 65	149 81	149 81	116 57	33 14 4 520	,o	• 1 in 1E+9	
4,500.00	4 454 10	4 495 45	4 453 57	17.07	17,11	150 02	156 62	122 56	34 06 4 599	D	4 1 in 1E-9	
4 500 00	4,551,93,	4,599.27	4 551 15	17.53	17.57	163 43	183 43	128 40	34 07 4 073	ő	1 to 16.9	
4 700 00	4 649 73	4,658 98	4 645 74	17,99	18 03	170 24	170 24	134 35	135.69 4743	ä	4.1 th 1E+9	
4 800 00	4 7 47 55	4 798 75	4 746 32	10 48	18 49	177 06	177 08	140 34	36 82 4 809	·ø	+ 1 in 16+9	
4 000 00	4,645 36	4,898.51	4 843 91	18 52	16 06	163 68	163 68	145 14	37.74 4.672	ø	<1 er 12-9	
5,000.00	4,943,18	4 900 28	4.041.43	19,39	19 43	190.710	190 71	152 03	36 67 4 931	Ö	4.1 in 1E+9	
5 100 00	5 040 99	5.098.04	5 009 08	19 80	16 63	197 53	197 53	157.93	39 60 4 988	ığ	4 1 m 1E-9	
5,200 00	5,138 81	5,197 61	5,136 65	20 33	20 36	204 39	204 38	163 82	40 54 5 041	ò	< 1 in 1E+9	
5,300 00	5 236 62	5 207 57	5,234.25	20 80	20 63	211.19	211 19	169 72	41 47 5 092	0	< 1 in 16+5	
5,400 60	5,334 44	5,397,34	5 33 1 83	21 27	21 31	210 02	216 02	175 61	42 41 5 141	ō	< 1 in 16-9	
5 500 00	5,432.25	5 497,10	5.429.41	21.74	21.78	724 85	224 20	181 51	43 35 5 167	.0	4.1 m 12+8	
5,600,00	6 530 07	5,598 88	5,527.00	72 27	22 25	231 69	231,69	167 40	44 29 5 231	ō	- 1 o 16+9	
5,700 DO	5,527.68	5,698 10	5,624.54	22 59	22 72	238 53	238 50	193 30	45 23 : 5 273	đ	5 1 en tE-S	
5,900,00	5 725 70 5 873 51	5,798 39 5,896 18	5,122.17	23,16 23,64	23 20	245.37	245.37	199 19 205 08	46 18 5314	đ	# 1 m 10+9	
		200	Mark States	44.45	73 67	257 21	252.21	.4	47 12 0 352	ė,	* 1 m 1E+5	
6,000 00	5 021 33	5,995 92	5,917,34	24,12	24 15	259 (25)	259 03	210 98	45 07: 5 369	d	14.1 m (E-9)	
u,100 00.	6015 14	6 055 69	601402	24 59	24 63	265 89	265 69	216.87	49 02 5 424	. a .	5 1 m 1E+8	the process of the case of

06/09/19 9:33:27PM

Page 12



cal Co-ordinate Reference.
D Reference.
) Reference:
rith Raference:
revy Countains Method:
figual errors are alfabase:
teel TVD Reference:

'Wall Goonch Fed Com 04 222H GC 3013 8 + 25 KB @ 3038 80ush GC 3013 8 + 25 KB @ 3038 80ush Grid

Grid Minimum Curvature 2.00 sigma HEO Compass DSN Offset Datum

	#1			Giffset Sita Error: 70 00
		5 4 2 37		Officel Well Error: 3 0 000
		SALE PROPERTY.		
	latwetri Wipest	dictionally Beparat operation Pects		And Probability Warning
D	tustu	(ush)		ctor diff
Fee	272.76	40 07, 5,454	O CONTRACTOR	
	229 56	50 92 5 491	ŭ	341 m16+9 351 m16+9
	234 55	51 87 5 622	a	14 In 16-9
	240 44 248 33	50 92 5 491 51 97 5 622 52 62 5 522 53 77 5 561	a	* 1 m 1E-9 * 1 m 1E-9
	250 22	54 73 5 606	0	*** # 15*
	250 11 264 00	55 65 5 635	0	Tin 15-9 - Tin 15-0
	267.74	58 64 5 681 67,17 5 675	0	
	769 87	57,59 5 565	Ó	. 4 i m 18+9 1+ 1 m 18+9
	275 03	58 53 5 602	Ö	. • 1 in 16 •0
	279 02	59 44 5 704	ď	* 1 m 16:0
	283 79	60 32 5 705	Ď	. 4.1 on 1E-9
	287.35	61.15 5.659 61.90 5.685	0	41 m1E+9
	291 40	62 27 5 679	0	s i m 16:9 4 i h 16:9
	282 25 283 66	62 57 5 671 63 20 5 647	o í	ે 1 માં 12-9 જો સા 12-9
	294 20	60 81 K 614	Ö	s 1 an 18-6
	293.83	84 38 . 5 564	o o	(4.1 m 1E+9
	223 25	64 95 5 515	ġ	<1 in 1E-9
	292.60	65 52 5 467 56 09 5 430 86 67 5 373	0	(< 1 m) 18-9
	292.11	56 09 5 430	0	s 1 in 10+9
	293 54 260 96	86 67 5 373 87 24 5 327	0	41 m (E-9)
	250 38	67,83 5.261	0	S. I. n 16:9]
	269 79		9	
	269 21	68 41 5 236 65 50 5 192	ò	(1)n 18(0) (1)n 18•9
	768 67	09:00:0:140	oʻ	5.1 In 1E-9
	284 03	70 17 5 106	0	4 1 in 16:0
	207 44	70 77 5 062	o o	<1 m 15 0
	267,34	70 66 5 050	ò	1 in 1E-D
	266.64	70 66 5 050 71 36 5 030 71 93 4 992	0	1 in 16:0' 1 in 16:0'
	269 36	72.25 5.005	ū.	€ 1 in 1€ 64 € 1 in 1€ 64
	269 45	72 25 . 5 DOB	Ö	<.tm 1€+8
	290 75	72 31 5 021	ò	4.1 m 1E+B;
	202 24 203 88	7230 5040	ă	1 in 15:9
	203 88	77.31 5.084	ť	1 in 16:0 <1 in 16:0
	295 65 297 67	72 27 5 091 72 17 5 123	g.	6 1 in 18:6 6 1 as 18:6
	209 88 301.88	72 04 B 156 71 89 5 167	a e	₹1 m.1E-9
	301,83	71.70 5.738	6	4 in 1648
	300 00	71 52 5 279	0	<1 on 1E 181 * 1 on 1E+9
	308 26	71.24 5.327	0	(€ 1 m 1E+9
	310.50	70 07 5 375	0	grafikat.
	310 SD 312,72	70 69 5 424	4	< to term
	317 04	70 40 5 473 70 09 5 524	o'	< 1 in 18-8
	317 04	50 77 5 574	ė,	€ 1 et 1 € 1 € 1 € 1 € 1 € 1 € 1 € 1 € 1 € 1
	321 11	69 45 5 673 69 15 5 671	o o	elimites
	324 70	85.84 67.8	a	e 1 m 10 9
	326 45	66 54 5 763	o d	* 1 in 1E-9
	337,97	60 20 5 605	ą.	4.1 m (E-9)
	329 37	68 02 - 5 6-12	o:	<1 in 18 មិ <1 in 18 មិ
	330 55	67,75 5 879 67,53 5 911	0	< 1 in 1E+9.
	332 50	67,33 5 838	. 0	4.1 m 16.9 4.1 m 16.9
	333,19	67 19 5 055	0	\$1 m (E+9)
	33373		ŧ g	美国地
	33407	67 03 8 979 65 92 3 902	. 0	1 in 16+9)
		paration factor,	THE PERSON NAMED IN	

Hawkeye Directional Anticollision Risk Report



Company: Novo Off A Gas. LC:
Project Edity County, MM.
Reference Sita: SEC 4: T235 - R28E
Site Error: Goonth Fad Com 04 222H
Well Error: 0.00
Reference Wellbore Off: Plan #1

Local Co-ordinate Reference:

Well Goonch Fed Com D4 222H
TVD Reference:

GL 3013 8" + 25 KB @ 3038 Boust
MO Reference:
GL 3013 8" + 25 KB @ 3038 Boust
North Reference:
GRId
Street Coloniation Nethod:
Grid
Culpul errors are at

2.00 signer
Database:
Desirabase:
Office L DSUM
Office L DSUM

fisct Des	lgn .	SEC 4	T235 - R	28E - Goon	ch Fed C	om 04 212	H-OH-P	an #1		1,12			Officet Site Error: 2 0000 c
Refere	em.	001		7 4 4 4 2		100		iu.			prof.		Offices Well Error: 1000 G
es au out of	Vertical	Messured	(Laries	Reference		24/45/00	WEST-VESSE	ance	like Sub-	0.5	190	10.0	Watering
Dojak .	Ocolin	Depiti	Depth 1	96,0679	70	Centres	Ostabes	Supre	Separation	Cart	Seneral	Protecting	Warring
ubiti -	(Date)	(04/1)	(Hrff)	(usft)	(ust))	(unit)	(Briti)	(watt)	(usn)	X31-72	Fecto		Warring
9,975 00	0.644 40	5 500 OU	9.470 17	35.95	35 93	401.08	401 08	334 23	74.64	of the contract of		⊀ I tri 1E-9	indra di kacamatan da kataban da
10 000 00	B 646 27		9 472 11	35 91	35 92	401 00	401.00	334 19	56 81	6 002	a a	1 vi 16-5	
10 014 96	9 6-45 77	9 430 67	0 472 84	35 69	35 86	400 84	400 58	334 38	66 80	6 001	oʻ:	4.1 m 16-9	
10 029 27	9 6 47 02	9 841 15 9 908 55	. 8 473 EO	35 87	35 86	400 61	400 81		65.60	6 000	a,	< 1 m 1E-9	
ID 200 00		10,008.55	0.079.79	35 78 35 73	35 15 35 62	407 18	491 35	334 65	66 70	6 001 6 001 6 017 6 012	0	4 1 in 15+9	
. a	a alternation	226735.14	10.7	6.740592	3.5	12 24	400.16				9	1 in tE-9	
	9 651 74	10,108.54	9 477 132	35 75	35 \$6	403 00	453 00			6 035	ζ0,	4,1 to 16+9	
	0 055 23	10 200 54	9.478 51	36 65 36 63	35 57 25 66	404 66	403 83 404 66	336 81		6 025	D)	4.1 m 1E15	
10 600 06		10,498.53	9.40131	30 28	35 B4	405 49		337.57		5 970	0	1 m 1E-5	
10 700 00	9,658 72	10,50b.53	9-417 (0)	436 60	36 11	43.32	455.32	337.75	68 57	5 026	-ğ;	- 1 et 1E-8	
00 000 01	9 660 47	10 608 53	50 main.	36 99	35.47	407,14	407.14	(49,42)	1	5871	7	- 17	
	9.003.21	10 708 52	9 25 43	37 45	133 50	407.67	407.57	337 60 337 72		5 808	0	< 1 m 15-9	
11,000 00	9,603 96	10,708 52 10,908 52	9,466 89	37.98	37 41	408 (0)	405.60	337.53		5 738	J0	< 1 m 16-9	
	9,665 70	10,908,52	U 438 29	38 57	37 99	409 63	40 E3	137.23		5 650	å o	* 1 m 1E - 9	
11,200 00	9,667,45	11,035 51	9 419 65	39 23	38 63	410 46	410 46	335 61		.5 573	· 0	4 1 m 1E+G	
11,300 00	9 600 10	111,108 517	9 461 05	35 94	39 34	411 29	411.28	336 20	78 99	5 484	o.	< 1 m (E-0	
11,400 00		11,205.51		40 (0	43.10	412 11	417.11		76 44	1 361	co.	e1 m 15-9	
11,500 UQ		11,300 50	0 493 87	41.62	40 01	412 94	412 94	334 97	77.97	5 298	0	- 1 m 1E-9	
11,600 00	9,674 43	11,408.50 11,508.50	9,435 27	42 33	41 77	413.77	413.77			5 196		< 1 m 1€+9	
11,700 00	9,676 17	.11,008 50	9 -00 66	43,58	42 63	114 60	414 60	333 20.	B1,30	5 090	(D)	5 J m 16-0.	
		11,008 49		44 25	43 63	415 42	415 42	332 34	83.09	5 000	10	≤ 1 m 1€+9	
	9,679 66	11,708 49	0.419.45	45 24	44 62	416 25	416 25	331 31	144 94		0	tin 1€r9.	
12,000.00	9 681 41	11,508 49 11,908 43	9,500 85	45 27	45 65	417 06	417 08	330 22		4 801	e i	1 m 15-9 .	
12,100 00	9,683 16	12,006 46	0.50225	47.34	45 71 47 51	417.91	417.91		65 65 90 60		.6	≤.1 m 1E-9	
O. Windle Comp.	B			The sales in			415.74				, a)	e-3 dt 1€+6	•
2,400 00	9 636 39	12,108 48		49 59	45 94	419 56	419 56	326 57			, a	1 m 16+9 .	
12,500 00		12 208 47 12 308 47	0.507.47	50 72 . 51 91 .	50 10 51 29	420 39	420 39	325.24 323.87	95 15		0	• 1 m 1€-9	
12,600 00		12,408.47		59 12	52 40	422 05	427 05		97.35		0	< 1 at 16+9	
	9,693 60	12,508 46		54 35	53 73	422 65	422 da				o.	4.1 m 18+9	
12 800 00	9.635 37			25.60	/54 95	(423.71							
2 900 00	9,007,12	12 706 46	9,51202	56 86	50 25	424 53	423 71 424 53		104 20		0	4 1 m 15+9	
3,000 00.	9 498 85	12,008.45	9.51 161	56 17	57 54	425 36	425 35		100.57		0	1 m 15-9	
100 00	9 700 61	12,90B 45	9,518.21	50 48	58 25	425 19	2426 18	314 80	111 39		. 0	* 1 m 1E-9	
13 200 00	9 702 35	13,008 45	9 51 7 61	60 41	60 15	427 02	427.02	313 17			ō	1 in 15-9	
3 300 00	9704:10	13 108 44		62.15	us 52	427.25	427.651				. O.	4 1 m 1E49 2	
3 400 00	9 705 84	U3,208 44		63.51	82 88	428 67	429.67	309 82	118 85		· C	e 1 m 1E+9	
3,500 03	9,707.59	13,308.43		54 68	84 25	423 50	120 50	306.11	121 39		.0	• 1 at 1E+9	
13 800 00	9,700 33	13,408 43	0,52319	Q1 27	65 63	400 13	430 33	305 38	123 95	3472	.o:	4 1 m 16+9	
3 703 00	9.711 08	13 108 43	9,524 59	67 66	67 03	431 16	431 15	304 63	126 53		0	4 1 m 1E+9	
13,800 DO	971282	13,008.42	0.525.96	59.07	50 43	431.93	431.60	302.85	329 42		(O)	* 1 pt 1E+0	
3,000 00	9,714 57	13 708 42	9.527.38	70 49	65 65	432 61	432 81	301 05			o.	< 1 at 1E+9	
4 000 00	0.7(63)	13,606 42	9 526 77	71 93 /	71.78	433 84	3 433 64	200 25	134 40	3 227	÷0	e't at t@-9	
14,100,00	9,718 06	13,608 42 13,608 41 14,009 41	B 530 17	73.35	72 71	434 47	434 47	257, 42		3 170	0	«.1 m 1E+3)	
4,200 00	0.719.81	14 005 41	5 531 57	74 60	74 16	435.30	435 30	295 57	139.73	3 115	0	< 1 in 16:0	
14,300,00	9.721 85	14 108 41		76 25	75 61	436 13	436 13	203.71	142 47	3 062	. 0	• 1 m (E+9)	
14,400 00	9,722 30	14 308 40	9,53436	77,72	77 07	436 50	436 95	291 63	145 12	3 011	o.	< 1 at 1E+9	
4 500 00	9,725 04	14 308 43	0,535.76	79 10	78 64	497.78	437,78	269 95		2951	(0)	< 1 m 1⊞-9	
14 600 00	9,726 79		9,538,55	80 56	80 02	438 61	438 61	750 04		2 013	(0)	4.1 m 1E+9	
14,700,00	9,728 53			62,14	61 50	405 44	439 44	269 13	153 21	2 866	Ö	1 in 1E+9	
1 725 85	9.720 00	14 535 25	a man am	82.54	81.90	439 60	439 66	205 62	154.05		, o	-1 o 1E-9	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Page 14:

06/09/19 9:33:27PM



keal Co-ordinate Reference:

All Reference:

On Ref Well Goanch Fed Com 04 222H GL 3013 8 + 25' KB @ 3038.80ush GL 3013.8' + 25' KB @ 3038.80ush

Plan	#1	Carata and a second		a de dema sominais anna 200	Gifset Ghe Erfar: 0	00 6
						00 u
				sed Protestifing		
12 Jan. 7	Store was the Co	Separation Pector	. Sep	aretion of Cobinton	Yameng (
	(statt)	(unit)	F	ctof	C. 1019	M.
6			io:	< 1 in 1E+B	and a sixture of the latest transfer the Principle of the Pariety of	
6	193 79	0 27 745 240	0	5.1 m 1E-9		
NG.	199 08	0.98 (203 164 1 70/117 587	0.	* 1 m 16+0 * 1 m 16+0		
0	1197,643	2 42 82 717	0.	< 1 et 1E+9		
8	195 92	3 14 [63 604	0	< 1 ca tE•∇		
	195 21	3 85 51 930	0.7	- 1 m 1E 4		
8	195 49	4 57 40 782	D	-1 in 16+9 -1 in 16+9 -1 in 16+9		
a)	194 77 194 06	9 29 37 544 6 00 33 325	b .	< 1 in 1E-9		
e .	193 34	9,72, 29,770	0	≠1 in 1£19		
6	102 02		0			
6	161 D1.	7 44 25 930 6 16 24 535 6 67 23 552	ō	4.1 m 164b		
8	191 19 150 47	8 87: 22 552	ō	>< 1 #F.1E+B		
si si	11MJ 76	9 59 20 866 110 30 19 414	0	2.50 B 3656		
8-	\$50 AV		0	*1 e 16-9		
ű.	189 G4 168 32	11.02 10.151 11.74 17.043	0	<1 m 1E+9 ≪1 m 1E+9		
si .	187 (8)	13,40,10 002	o	4.3 of 1E-9		
đ	186 17	13 40 .16 047 13 17 15 167 13 65 (14 40)	0	4.1 m (E-9	American control of the control of t	
G	9186.372	13 69 114 404	O	<1 in 1E+9	CC ES	
2	186 46 186 71	14 56 13 810 15 19 13 424 15 82 13 190	0	tin 16.9		
0	192.68	15 19 .13 424	0	< 1 in 1E+9		
4	192 68 198 95	16.40, 13.067	0	s in te 8		
1	207,00	\hata 7.11 ₹13 088	Û	< 1 in 1€+9 < 1 in 15+9		
2	216 94	17.78 (13.20)	Ü	€1 in 1E+9		
9	225 20	16 50 13 337	D			
8 5	239 51 250 64	19 24 , 13 445 20 01 11 525	0	≠ 1 m 1€+9 ≼ 1 m 1⊕+9		
ě	262 17	20 01 13 505 20 78 13 009	C C	< 1 m 1E 9		
è	273 50	21 60 13 660	ő	+ 1 er 1849		
4	784 85	22 40 13 718	ů.	* 1.01 TE+B		
1	200 19	22 22 13 757	u	<1 m 1E+0 <1 m 1E+0		
9	307 54 318 90	24 05 13 788 24 69 13 812	0	e i en 1ۥ9		
è					,	
ř	330 25 341 61	25.74 13 E30 26 60 13 843	Ü	<1 or 1E+9 • 1 or 1E+9		
4	352 98	27.48 - 13.653	0			
?	364 34	28 23 13 859	0	< 1 m 1E-9		
-	375.77	29 21 13 862	a	< 1 m,1E-9		
1	387 07	30 09 13 663 30 96 13 601	ū	4.1 m 1E+9 - 1 m 1E+9		
ě b	409 81	31 87 13 858	D D	• 1 in 1E+9		
5	421.18	32 77 -13 854	0	本连的3度6 日		
2	432 56	33 37 13 648	O	1 to 1E-19		
9	443 93	34 57 - 13 842	В	• 1 in 16 · 9		
	455 31 468 65	35 45 13 635 36 36 13 627	b	. c.1 at 15÷9		
í	478 00	37 30 13 618	Ď	4 1 m 1ۥ1 4 1 m 1ۥ8		
5	48D 44	38 21 13 809	8	e1 in 1640		
5	500 82	39 12 13 800	ď	74.1 m 16.9		
Ś	512 70	39 13 13 800 40 05 13 700	Ġ	41 m 1E+8 41 m 1E+9		
5	529 5th 534 96	40.97 13.761 41.89 13.771	Ö	4 1 et 1E-9		
ŝ	546 34	42 81 13 761	6	e tan tErb		
7.	557,73	43 74 13 751	ů.	(e) 1 (e) 15 x (c)		
b	560 11	44 67 13 740	Ø.	4 1 in 16-9		
9	580 49	45 60 13 730	ů.	, 4 1 m 15+9 4 1 m 16+9		
1	591 88	46 53 13 720 47 46 13 710	0	€ 7 at 1E+1		
	-3.4	7	à	1 In 18:0		
4	G14 65	48 40 13 700 49 33 13 691	0	∢1 in 1E-9 ∢1 m 1E-0		
		eparation factor, ES	***			

COMPASS 5000,15 Build 91 06/09/19 9:33 27PM

Hawkeye Directional: Anticollision Risk Report



Novo Oil & Gas, LLC Eddy County, NM SEC 4 - T23S - R28E 0.00

Goonch Fed Com 04 222H 0.00, OH Plan #1

Local Co-ordinate Retirence: Well Goonch Fee Com 04 222H

TVD Retirence: GL 3013.8: - 25' KB @ 3038 80ush

MD Retirence: GL 3013.8: - 25' KB @ 3038 80ush

Morth Retirence: GL 3013.8: - 25' KB @ 3038 80ush

Grid

Survey Calculation Nethod: Minimum Curvature

Quiput error are at ZO0 signe

HED_Compass_DSN

Offset TVD Retirence: Offset Datum

VAN PIL	oign Co.	DEC 4	- 1235 - R	28E - Goon	cn Fed C	om 04 221	H - OH - Pla	n #1	Paralle and the Control of the Control	eserveryon	-	Offised Sale Error . 01
Rutere	ince .	One		Sems Major	200	E. M.	Den		15 (15 F)	100		Officed Well Error: 01
erwed 🖟	Vertical	Measured	Vertical	Reference	Offices	Batowe	Wallettell	Swienen	Minimum Banarati	an Ris		** Warning
lapth	Depth /	Depth	Coust	Reference (USA)		Centres 2	Drutance	Etipers .	Minimum Seperati Separation Factor (usf)	No.		Warning
neti)	inem.	- (aru)	i lum	(ULII)	turuti 🔻	(ush)	(mail)	tiam (S.)	(uni)	Pec		
400 00	8 214 77	6,245 00	6,161.85	25 50		- 687 68	.627,68	637,42	50 27 13 681	ę	* 1 at 1E+9,	To the state of th
500 DG	6 410 40	6.345.13 5.444.37	6,256 97 6,355 86	26 03 20 51	25 86 26 33	706 01 712 33	700 01 712 33	5-13 80 660 19	51.20 -13.971. 52.14 13.662	ø	4 1 m 1E+9	
6,000 (30	6 500 21	8.545 60	U 45.3 (15	20.59	25 61	734 96	724 66	97158	53 06 13 652	0	4 7 47 1E+B	
6.700 DO	8 609 03	6.642.83	6,550 11	27 47	27.29	730 95	726 94	682-98	24.02 13.643	ő	4 1 at 1E-9	
0,000,00	6,703 84	6 7-12 07	6 647,17	27.95	27.77	749.31	74031	694 35	54 60 13 034	S	* 1 in 1E 9	
00 000	6 801 46	6.641.30	674424	28 43	28.24	761 64	761 84	700 74	55 90 L3 675	9	61 at 1E49	
9,655 00 7,000 00		8 895 87	6,797.62	25 69	20.51	765 42	768 42	71200	56 42 .13 620	0	4.3 m 1E-9.	
7,100,00	6 699 54 6 697 96	6,940 54 7,039 83	6,841,31	29 90 20 36	25.72 29.30	773 69 785 49	773 88 765 49	717.05 727.74	55 64 13 615 57,76 13 601	.0	€ 1 m 1E+B	
	7,098 99	7,139 06	7,03551	29.78	29 68	796 35	796 33	737 70	58 63 13 562	õ	4 1 m 1E-18	
7,300 00	7,166 42	7,238 15	7,132 42	30 15	30 16	605 -5	606 48	747.60	59 47 13 590	4	22.46.2	
7,400.00	7 290 15	7,335 93	7,729.04	30 54	30 64	816.02	616 02	747 (X) 755 75	50 47 13 500 60 25 13 506	Ď.	4 1 m 16:0	
7,500 CO	7,396 08	7,435 30	7,325 29	30 67	31 11	825 11	825.11	764.07	61.04, 13.616	e	e im iE.G.	
, 535 00 , 500 50	7,451 D8 7 406 DB	7,489.18 7,633.21	7,077 97 7,421 03	31 04	31,37	829 G6	825 96	768 54	81 43 · 13 511	o,	<1 m 16+9	
				31,18	31 59	633 96 l	633 96	772 22	61:74:13:506	8	1 at 12 0	
7,700 00 T	7,596 06 '	7,631 02	7,316.70	31 44	32.06	843 (3	843 13	760 71	87 42 13 507	0	- 1 m 1E+9:	
, 600 00 200 00	7,796 08	7,726 84 7,826 65	7,012 38	31,72	37 53 33 01	652 ft	252.71 862.68	769 61 796 92	63 10 13 515 63 76 13 520	o o	<1 m 18-9	
000 000	7,850 OB	7.024.47	7,803 74	32.29	32 48	673.04	873 94	808.61	64 45 13 559	ē	< 1 st 16.6	
160 00	T,995 OB	0.036.21	7,013 26	33.58	34 01	683,30	58.3 2G	818 00	69 19 13 647	à	*1 m IE-5	
	3,096,087	6,154.35	8,029 94	32.87	34.53	821 67	801 57.	825 50	65 98 13 514	ió.	(1 m 1E - 0	
300 00	\$ 195 OF	8 273 67	8 146 63	33 16	35 61.	BG7 93	897 90	831 19	66 72 - 13 456	0	* 1 m 1E:91	
500 00	8 323 08 8 323 08	8,394,35	4.258 77 8.350 72	33 45	35 45	902 04	907.04	834 61	67 42 13 379	G	< 1 at 1E-0	
600 CKI	8.496 On	8 515 39 6 621 44	8.389 73 5.495 78	30 74 34 00	35 84 35 14	903 97 903 97	903 37 903 57	635 79 635 30	68 (28 13 277 66 67 13 164	0	* 1 m (E+0)	
700 00	6.596 68		11. 11. 11. 11. 11. 11. 11. 11. 11. 11.			11 41 11 12	1,47.4				1 m 1E+9:	
100 QD	6,090 08	8 721 A4	6 595 78 6 595 78	34 62	36.42	933.97	903 97 900 27	834 71 834 13	69 54 12 944	0	* 1 m 16 · 0	
00 200	8,798 00	8 921 44	-6,705 78	34 93	36 98	903.97	903 67	834 54	76 42 12 636	g p	6.1 m 1E+0.	
000 000	8 896 08	9.021 44	8 855 78	35 27	37.26	S03 97	903.97.	632.95	71 01 12,730	0	1 m 16.9	
100.00	2 jago 02.		8 995 76	35 52	37,54	903.97	903 97	632 33	71 80 12 825	Ø,	et in fil-1	
200 00	9 096 08	9,221 44	0.09578	35 62	37.82	901.97	903.97	831 77	72.20 (2.521)	σ:	4 in 16:0	
273 30 275 00	9 171 08	9 294 74	0,160 05 0 170 78	36 04 36 04	28 63	903 97	900 97	631 33	77 63 12 446	a	(5.1 4• 1⊞• Ω)	
300 00	0 196 07		9,195 77	36 12	36 04 36 11	903 97 903 98	903.97	631.32	72.64 12.444 72.78 12.420	9.	* 1 et 1E+9	
325 00	9,220 96		9,222.07	36 18	38 19	DU3 69	903.95	831 08	72 91 12 398	g.	< 1 xr 1E-9	
350.00	9 245 75	II 77.2 4.0	0.248 84	136 24	36.35	903.95	903.98	830 05	73.03 (2.378)			
375 00	9.270 31	8,401 51	0,248 55	38 39	36.31	903 93	903.93	830 81	73 13 12 301	0	1 m 16+9	
400 00	5 294 60	9,420 54	0 303 13	30 33	38 36	603 56	903 es	830 05	73 21 12 346	O.	· 1 的 在 9	
1,425 (ID) 450 (ID	931834	9 482 85	9 374 45 9 354 45	36 36	36 40	903 76	903 76	430 48	73 28 12 333;	0,	4.1 m 16+9 l	
Comme	college.	2000000	5.75	36.39	35 +3	903 63	603.63	830 30	73.34 12.322	0	< 1 m 18-9	
475 00	9 365 13			38.42	38.46	003 (7	923.47	830 09	73 38 17 313	.0	4.1 m 16-9	
525 00	9 387 68	9 564 65	9,405 08	36 44	36 48 36 49	903 26	903 25 903 05	829 87 829 84	73 40 12 306 73 42 12 300	0	4 1 m 1E+9 4 1 m 1E+9	
550 00	8 430 65	9,392,31	9 453 26	36 44	38 49	902.81	902.81	829 39	73 42 12 297	g.		
	8,451,40	9,619,80	0 476 19	26 44	38 43	902 50	902 53	829 17	73 41 12 294	C:	< 1 in 10+9	
500.00	9,471.18	9,647 32	9 498 25	36 43	38 46	502 22	902.22	629 83	73 33 12 204	∌ a ,	≾3 m.18+9.	
625 00	9,490 13	0 674 87	9 519 33	36 42	35 44	901.63	901 88	878 53	73.30 12.296	id.	4 1 m 16+9	
U50 00	9.50H 70 9.525 34	9.702 41 9.730 00	0.630 37	36 40	38 41	901 52	901 52	626 20	73.32 12.256	.0	1.015.9	
700 00	9 541 50	9,730.00	9 576 01	36 38 36 38	36 35	901 13 .	901 13 900 71	827 89 827 50	73 27 12 209 73 21 12 333	8	< 1 m 1E-0	
*		Constant	- C				794	2.000	73 15 .12 306	0	400 500	
725 00 750 00	9 570 74	9,785 11	9 607 65	36 T3 36 30	36.29 38.23	900 27 698 81	900 27 690 61	827,12 825,73	73.15 (12.308) 73.08 (12.313	0	e tan 1E+19 ∢ tan 1E+19	
775 00	9 583 72	0.640.34	9 (33) \$3	36 27	30.16	869 33	890 32	825 32	73.01 12.319	oʻ	* 1 in 1E-9	
,600 DO	9 855 57	9,607.59	9,633 63	36 20	38.12	898 82	898.82	825 89	72 93 112 335	Ü	4 1 m 1E+9 4 1 m 1E+9	
825 00	9 606 25	9,895.00	9 644 77	35.19	36 05	1826 25	898 29	825 44	72 65 12 331	0		
850 00	9 615 73	0 022 35 :	9 66 4 23	36,15	37 66	697.76	697 70	824 59	72 77 12 337	90	e i m i E-s.	
975 00 900 00	9.823 99 9.631 01	9 949 64 9 976 85		36 11	37.92	167.20	897,20	524 51	7269 12343	10		
025 00	9 636 76	10 003 Sa	9 688 63 9 673 55	36 07	37.84	896 64 695 00	696 64 690 06	924 03 823 53	72.61 12.349 72.52 12.356	0	<1 at 1€+0 < 1 at 1€+0	
1250,00	9 641 22	10 031 03	9,876 93	25 99	37.70	695 47	NS 47	823 03	72 44 12 361	0	* 1 m 1E-9	
975 00	9.0-44.40	10.037.98	9.67879	35.93	37.63	83 68	894 68	822 57	72 36 12 366	fai:	< 1 in 15-9	
000 00	9 6 46 27		0,679 16	35.91	37.55	25-4 29	894 26	622 00	72 26 12 372	20	41 to 1E+9	

Page 16



Cal Co-ordinate Reference: Well Goonch Fed Com 04 222H.

D. Reference: GC 3013 8 - 25 KB @ 3038.80such

I. Reference: GC 3013 8 - 25 KB @ 3038.80such

Cal Company Calculation Nethod: Minimum Curvature

Louis errors are at 1. 200 sigms

Labaser: Company Calculation Nethod: Calcu

					47 m / 1 44 400 and and an an
Plan	#1.		leannin armar,		Offised Site Error: # / 0.00 (ssf.)
0.00		CHARLES TO LINE		CARLES TO THE	
htta		正理一个人的工作	100 P	国际 的722	Offset Well Errors 0.00 usts
27	3 M 3	Minimum Separation	Risted		
11121	e liste and	Becaration Pagin	Separation		Warning
	(ast)	County Passes	Pactor	Un Company	
4	-			113 7 1 34	Control of the second
16	821,71	72.23 12.376	ı D	C1 m.1E-9:	4
16	820 04	72 02 12 306	40	4 1 in 1E-9	
15	817.95		0	4 1 in 1E D	
14	815 /1		0	* 3 m 1E+9	
14	813 32	72.12 12.274	.0	< 1 m 1E-9	
13	610 76	72 45 12 191	a.	• j in 16•9	
13	605 10	72.93 12.081	0	< 1 m 1E-9	
Ĥ.	605 26	73.55 11 948	0	<101E-0	
D.	807 32	74 32 11 785	÷0	4 1 m 15 0	
15	787 23	75 22 11 625	ំបំ	< 1 at 1E+9	
17.	766 Ut		0	4 1 m 15+9:	
18	792 66	77,42 11,238	0	4 im 1E-9	
ю	789 19	78 71: 11 027	- 0	4 1 m 1E-9:	
2	785 62	60 11 10 607	Ü	clinite B	
39	741 93	61 62 : 10 581	0	4 3 m 1E+0	
16	77A:15	83 23 10 350	0	* 1 in 1E+9	
2 ()	774 27	8494 / 10 110 (7.0	4.1 in 1E-9	
15.	770 31.		0	- 1 m.15 (9)	
19	768 25	HA ATT GALLA	30	< 1 m (E+G	
.3	763 14		ō	1 in 18-9	
a	757,04	92 64 9 181	16	e 1 in 1E+8	
13.	763 67	94 76 - 8 954	00:	<1 in 16-9	
rb.	749 35	96 84 6 730	0	• 1 in 1E-9	
(4)	744 96	96 16 - 8 511	₹0.	< 1 in 1E+9	
10	740 52		.0	t in tE(0	
y_i	736 03	303 01 0 025	0	< 1 m 18+0	
3:	731,50	100 24:7 886	(B)	el in tEig.	
Į1	728 92		0	* 1 m 1E+0	
ă	722.30		(a)	en mines	
16	717.65	113 72 7,311	, 0	< 1 m IErP	
ē,	712 95	110 20 . 7.131	0	·] er JE:9 ·	
3	708 24	119 99 d 057	:0	< 3 to 18+9	
12.	703 49	121 54 6 788		4 1 to 1E+9	
ů.	698 71			1 at 1E+0	
2	693 91		D O	- 1 en tE-19	
2.	680 00		a .	4 1 et 1E-9	
	of the state	\$100 BH 560.54	- 30	130000	
ia.	884 24	132 38 6 169	0	4 1 m 1E-9	
16	679 38		0	* 1 in 1E+9	
9	674 49		0	1 m 16-9	
q.	860 59		(0)	4.1 m 1E 40	
8	664 68	143.61>5.628	0	Rimite's	
2	659 75	146 47 15 504	0.	e1 n 1E-8	
6	054 81	149 34 .5 385	0	1 m 18-0	
9	649 66		0	1 in 1E-9	
9	844 90		(0)	4 1 at 1E 19	
7:	030 02		oʻ.	* 1 m 15+U	•
	talk at .	1.00.00 1.000	8		
2	634 94			1 in 18 • 9	
2	679 90	163 91, 4 843 164 26 4 632	, 0	e.1 an 12 -9	
2	623 46		0 0	< 1 in 16-9	SF:
u.	- 0.3 32	104 47 4 026	280	4. (ALI)55+20	3F

nt, SF - min separation factor, ES - min ellipse separation 7:

COMPASS 5000 15 Build 91

Hawkeye Directional Anticollision Risk Report



Local Co-ordinate Retrence.

TVO Reference:

MD Reference:

North Reference:

Burvey Cevandion Method:

Couput errors are all

Ostabase:

Other IVD Reference:

Well Goonch Fed Com 04 222H:
GL 3013.8' + 25' KB @ 3038 80ush
GL 3013.8' + 25' KB @ 3038 80ush
Grid
Minimum Curvature

2.00 sigma
HED Compass DSN
Offset Datum

ey Progr	upn k	SEC 4	1235 - R2	BE - Goon	on Fed C	om 04 2311	OH Pla	n #1	TT TO THE PARTY OF	arganic siden	************	D Officet See 1	不是有用的的情况
Rafen						hair le	Dotar		Nicologuro Sequeratio		0.000	Officel Well	****
	Vertical	Meganiesi	Vertigal	Reference	Offset	Between	West Wall	on week	Bigginger Generalis Sepatation (Pactor ((est))	Shakara Ana	ent Publisher	Siddiffer and I	والمرافقة
epth	Deuth :	Depth	Copin	1111			Distance	Elizosas	Separation Pactor	Sepa	River College	N. P. College	uming .
no ,	(usfi) [(uett)	(ueff)	(usft)	traft!	(Unfil)	(weft)	(Mari)	(uen)	in the	ier), grad Jak		3.0
-0.00	0 00	0.00	0.00	0.00	000	201 78	201.73		And the second second	0	4,1 in 1E+9	MARKET STATE	
100 00	100 00	99 80	69 20	0.13	0 13	201.75	201.78	201 51	0 27 . 751 252	0	4 1 to 16+6		
200 00	200 00	199 50 .	109 80	0.49	0.42	201 78	201 78	200 79	0.59, 234 834	0	61 m 1E-9		
Jun bo	300.00	299 80	200 60	0.65 0	0.85	201 78	201 78	200 05:	1.70 : 116 552	0	• in iE · 0		
00 000 00 000	400 00 500 00	389 80 469 60.	389 £0 406 £0	1.21	1.21	251.79	201 78	199 38	2 42 83 415	0	<.1 m 1E-0		
				1.57	1.57	201.75	201.76	198 64	3 14 64 344	ė.	s 1 in 16+9		
500 00	E30 00	599.50	909 60	1 83	1 63	701.76	201.78	197.92		0	4.1 m 15:0		
700 00	700 00	699 90	699 60	2 29	2.24	201 78	201 76	197.21	4 57 - 44 155 -	0	< 1 in 1E+8		
900 BO	900 00	799.60	700 80	2 84	284	201 78	201.78	120 48	5 29 30 167	0	€ 1 m 1£+0		
00 000	1,000 00	699 80°	99 EO	3 00 3 38	3 00	201.78 201.78	201.78	195 96	6 00 23 609	0	4.1 m (E.5		
						A12 100		979.	6.72, 30 024	0	* 1 m 16-9		
100 00	1,100 00	1,099 50		3 72	3 72	201 76	201 78	194 34	7.44 27 130	0	< 1 m 1E - B		
200 00	1,200.00	1,199 80		24 08	4.08	201.78	201.76	193 62	5 15 24 744	.0	4 t as 1E-9		
300 00 400 00	1,300 00	1,259 80	1,199 60	4 44	444	201 76	201.78	192.01	8 87: 22 745	D	4.1 m.16.19		
500 00	1.500.00	1,399 80	1 205 65	5 15	479 515	201.78 201.76	201 78	192.19	9 59 21 044	0	e t et tE-d		
							7201,78	3191 47	410 31 719 580	0	€t n i€-s		
000 000	1,600 00	1 559 60		5 51	551	201 7ii	201.78	190 76	11 02 18 304	D.	4 T in 16.6		
700 00 800 00	1,700 00 1 800 00	1,899 80	1 630 60	5 87	5.57	201.78	201,78	199 04	11,74:17 168	D.	e lan lEis		
\$00.00	1,000,00	1,799 80	1,769 80	6 23 6 50	6 71 : 5 59 :	201 76 201 78	201,78	165 32	12 45 , 16 199	a ,	4.1 m 1E+S		
000 00	250000	1 200 00	1,669 60	8 95	5 94	201.78	201.76	188 60	13,17 15,317 13,89 14,527	0	.tmtE.9	00' 00	
										C	* 1 m 1E+9	CC,ES	
100 00	2,050 08	2,093 52	2 095 50	7 29	7.27	202 69	202 69	138 14	14 55 13 927	o ·	c.1 et 18-9		
200 00 200 00	2,199 84 2,199 45	2 191 17	2,151 03	7.61	7.59	205 44	205 44	190 25	15 18 13 531	8	< 1 m 1E-9		
400.00	2,394.70	2 286 71	2,360 96	7 B 1 8 27	7.50 8.22	210 03 218 43	210 03 . 216 48	194 22 200 64	15 81 13 283	0	< 1 m 1E+9		
500 00	2,497,47	2,477.25	2,475.06	3 61	9 55	224 81	224 81	207 72	10 44 13 164 17 09 13 156	c o	4.1 an 1E+9		
. 18 11 111	77.1	4											
00000	2,595 62	2 572 18	2.568 37	8 97	8 69	235 03	235 n3	217.29	17.75 13 240	(a)	4.1 m 16.49		
700 00 800 00	2,693 44 2,791,25	2 670 07	2,654 17	9 34	5 25 <	245 70	245 70	226 24	18 45 13 384	G.	4 1 at 1E-9		
900 00	2 869 97	2,789 31	2,761 23 2,858 29	10 10	9 63	258 51: 270 35	258 51 270 36 "	229 31	19 21 12 400	0	1 m 1E-9		
00000	2 986 88	2,087,77	2 055 35	10 60	10 41	782 28	262 28	250 41 361 53	19 97: 13 539 20 75: 13 803	0	1 40 16-6		
	the standards.	4 04, 000			4-14					0.6	,4,1 in 15-9		
100 00 200 00	3.684.70	.3 067 cn	3.052.42	10 61	10 51	204 23	294 23	272 68	21 53 13 658	0	< 1 × 1E ⋅ 9		
300 00	3 250 33	3 265 47	3 149 45	11 32	11.22 11.64	306 20	306 201	283.85° 296.03°	22 35 13 698	g.	1 m 1E+0		
-00 DO	3,378.14	3,35470	3,343.62	12,76	12 05	330 24	316 21	306 24	23 17 13 731 24 01 13 757	0.	4.1 m 16.9		
500 00	3 475 95	3 483 94	3 440 60	12 59	12 49 7	342 30	347 30	317 -5	24 85 13 777	0.	5 1 m 1E+D		
600 00	3,573.77					4.04							
700 00	3,573,77	3,563 17	3 634 51	13 63	12 82	354 37, 366 47.	360 47	379 08	25 60 13 702	0	1 m 1616		
200 00	3,769 40	3 761 64	3,731,87	13 90	13.79	376 ±0	376 56	331,17	20 65 .13 602		tin 16-9		
900 00	3 807 22	3,860 #7	3 828 94	14 35	14 23	290.71	350 F.1	262,43	28 29 13 813		v = 1 to 1E+9		
000 00	3 965 03	3,960 10	3,925 00	14 80	1468	402 86	402 66	373.65	25 16 -13 814	Ď	€ 1 m 1E+9		
100 00	4,562 84	4 059 33	4 023 07	222	10.50	2009		2444	transfer at the				
200 00	4.160 65	4,158.57	4,120 13	15 25 15 70	15.12	427.14	415 01	384 97	30 04 13 813	0	1 in 16+9		
300 00	4 258 47	4 257 60	4 217/20	16 15	16 03	439.35	439.36	407.54	30 93 13 611	o .	e ten teis fich ters		
400 00	4 256 29	4,257,00	431426	10 61	16 48	451.55	461.55	418 63	32,72 13 801	a ·	< 1 m 1E+9		
500 00	4 454 10	4,456 27	4 411 33	17 07	16 94	403 75	453 73	430 13	33 62 13 795	-0	4.1 m 1E-9		
E00 00	4,551,92	4,555 50	4 500 32	17 53	17 40	473 55	475 95	441 43	34 52 13 768	-			
700 00	4,649,73	4,654.73	4 505 45	17 50	17.65	488 17	488 17	452.74	35 42 13 766	,o a) - 1 m 18-9		
600 003	4.747.55	4 753 98	4 702 52	18 48	18 32 4	500 39	500 30	464 05	30 34 13 771	ĕ	4.1 m 16+9		
00 000	4 5 45 36	4 653 20	4 769 56	16 62	10.76	612.62	512 62	475 37	37 25 13 753	e	i. a. t mt tillefi	-	
000 000	4 843 18	4,952.43	4 696 65	19 39	19 25	524 65	524 83	480 59	38 15 . 13 753	0	<1 m 15+9		
100 00	5 0 40 00	- 5,001 66	4,903,71	19 86	19 71	537.00	537 09	496 01	39 05 13 744	ā	<1 m 15-9		
200 00	5,138 81	5 150 90	5,000 76	20 33	20.18	549 34	543 34	509 34	40 00 113 734	.0	5 1 m 16 • ff		
300 00	5 236 62	6,250 13	5,167,84	20 00	20 65	501.29	561 59	520 67	40 92 - 13 725	O	• 1 m 1E+9 • 1 m 1E+9		
400 00	5 334 44	5 349 36	5 284 93	21.27	21.11	573.65	573.65	532.00	41.64 . 19 715	0	4 1 m 1E-9		
000 00	5 432 25	5,448,59	5,381,97	21.74	21.58	566 11	\$80 11	343.34	42.77 13 705	b	< 1 m 1£19		
600 00	5,530 07	5,547,83	5,479 03	22.23	22 06	598 37	598 37	55466	43 60 13 565	ò	· 1 in 15+8		
700 00	46 627 68	5,647,06	5 578 10	22 69	22,52	610 64	61064	560 02	44 62 13 685	ő	41 m 12-9		
600 DO	5 725 70	5 746 29	5,573 15	23,16	23 00	072 91	622 91	577,38	49 55 13 675	G	* 1 m 1E+9		
900 00	5 823 51	8 645 53	6,778.23	23.64	23 47	633 19	635 19	588 70	48 43 13 605	0	4 1 m 1E-9		
000 00	Se 621:333	5 941 76	5 657 29	24.12	23 94	647.47	647.47	500 05	47 417.13 655	e	4 1 m 1E-9		
100 00:	6,019 14	6 043 99	5 004 30	34.59	24 42	650 75	656 75	611.40	48 35 13 646	io o	< j er (E-9		
200.00	d 116 85	6 143 23	6 001 42	29 07	24 89	672 03	672 03	622.75	49 28 : 13 639		5.1 m 1E+2		

06/09/19 9:33:27PM

Page 18



Coordinate Reference,
part Coordinate Reference,
Preference;
Heternece;
th Reference;
the Reference;
part section Method;
part section Method;
the ITVO Reference;
het ITVO Reference;

Well Goonch Fed Com 04 222H 'GL 3013.8' + 25 KB @ 3038.80ush GL 3013.8' + 25 KB @ 3038.80ush Grid.

Grid
Minimum Curvature
2.00 sigma
HED_Compass_DSN
Offset Datum

lai	1 #1		-	Citizet Site Griec	at us
쨷		10.4		Offset Well Error: 0	30 Us
ALT.		Bintimum Beperati	on Ris		
	Lebosan Edipsos	a paration Partor		sed of Probability and a warring a	gradit e
	(witt)	(usli)	700	sed on Probability Hamiling Matter of Collision Libr	
ен. 2	634 10	50 22 13 627	Ó	7 lm 16-9	1000
1	645.48	51 16 13 617.	Ö:	4 1 th 18+9	
1	638 61	51 16 13 617. 52 09 13 606	ő	\$ 3 et 1E+9	
Ċ	60t 17 679 52	53 to 13 599 53 97 13 590	g.	et in that	
ö	500 88	94 91 13 581	0	. € ian 1E+9 : • 1 ki 1E+9	
0.	702 24 708 49	55 56 13 577 56 37 13 568	0	x 1 in 16+9 ∢1 in 16+9 ,	
à	713 54	56 60 13 563	ö	Climited.	
9	724 28	67.71 13.551.	Ü,	1 m 1E-9	
6	734 38	58 58 13 536	O,	×1 m 16-9	
2	743-90	59 42 13 519	G:	< 1 m 1E-0:	
G.	752 95	60 22 13 5041	0	5 1 in 1F-A	
i	761 64 186 34	00 97 13 492	0	4.1 m 1E-0	
9	779.23	61 06 13 490 61 06 13 431	-0:	tin 1E-9	
		177-7	ığ.	की कि 1840	
1	775 16 785 50	62 34 13 499 63 81 13 515.	0	< 1 m (世) 9 ·	
Ď.	750 23	63 67 13 537	0	* 1 m 1E - B - * 1 m 1E - B -	
š.	50u 34	# # MA # # # # # # # # # # # # # # # # #	0,	< 1 th 16+9;	
3	918 25	65 08 13 673	D.	€ 7 th 1E-9	
	626 32			*,1 m,1E+9;	
9, 1;	832.30	93 bi 13 546 86 67 13 495	0	- 1 e 16-9	
4	835 03	67 32 13 419	0	* Fin iE-in !	
9	637 41	87.98 13 319		• 3 kr 1€•9	
2	835 95	55 57 10 200	0	*1 m 1E-91	
3	636 37	E9 15 13 084	e Di	() p.(8 ₂ 9)	
2	635.79	69 74 12 985	o o	41m1E+9	
2,	835 20 834 63	70 33 12 876 70 91 12 769	0	<1 m 15+0	
2	834 02	71.51 12.664	0 0	4 101 (E49) 4 191 (E48)	
ž.	632 42	200		309290-2906	
2	932 42 532 99	72 10 12 569 72 54 12 454	0.	*) at 1E+0	
2	832 08	72 56 12 402	201	€ 1 m 16+0 4 1 m 16+0	
3	832 88	72 55 12 492 73 69 13 458	0	≤1 m 1E+9	
3	632 b1	72,62, 12,437	a.	e't million."	
3 -	832 83	77 93 12 420	o-	1016-9	
	632 94	73 03 12 456	£o.	4.1 m 1E-9.	
:	633 15	73 11 12 395 1 73 18 12 389	0	- 1 m 1E+Q	
	833 50°	73 18 12 389 73 24 12 388	0	≈ in iti∙e. ≪ im iti÷e.	
Ď	834 68	73 36 12 351 73 30 12 400	O O	1 m 1E-0 1 m 1E-9	
i.	835 61 836 80	73.30 12 400	0	4.1m1E+9*	
le d	838 30	73.31 12.415 13.30 12.437	0 D	< 1 in 16-9 < 1 in 16-9	
	840 14	73 28 12 456	υ	5.1 to 1E-0	
,	642 38	71.74 47.603	661	* 1 m 1E+B *	
į.	845.05	73 19 12 548	o ·	4 1 in 16+5	
	548 20	73 12 12 608	.0	4 1 m 16 - 0	
Ė	851.87	73 24 12 502 73 19 12 548 73 12 12 600 73 04 12 683 72 95 12 735	n O	< 1 in 1E-8	
١.	856 09	12 95 12 735		<u>∢î în 1649</u> :	
l.	860 69	72 85 - 12 818	0	1 in 18:0	
,	866 31	17273 12911	0	< 1.in.1E+9	
I',	872.36	72 51 13 015	0	*1 in 16 ii *1 in 16 • 0	
i,	886 42	72 47 13 129 72 33 13 255	o.	51 m 1E-9	
	606 46				
	633 15	72 19 13 391 72 03 13 538	0	* 1 6 1 E 9 * 1 6 1 E 9	
	912.50		, o	5.7 in 1E-9	
	922 48 933 08	-71 72 13 663 -71 56 14 040	.03	4.1 in 1E-9	
i	933 08	71 56 14 0 10	0	e 1 in 15 · D	
;	1-844 25	"71 #0 s14.226	0	13 m 16+0	
	556.97	71 23 14 420	Ü	<.Tm (€+0	
i.		paration factor, E			10000000

Hawkeye Directional Anticollision Risk Report



Novo Oil & Gas, LLC Eddy County, NM SEC 4 - 123S - R28E 0.00 Goorich Fed Com 04 222H 0.00 OH

| Well Geonch Fed Com 04 2224|
TVD Reference:	GL 3013 6*+25 KB @ 3038 80ush
TVD Reference:	GL 3013 6*+25 KB @ 3038 80ush
TVD Reference:	GL 3013 8*+25 KB @ 3038 80ush
Servey Calculation Method:	Minumum Curvature
Output cross as et	2,00 sigma
Babblasse:	HED Compass_DSN
Other Datum	Other Datum

Offset Des	ign*	SEC 4	T235 - F	128E - Goon	ch Fed C	om 04 231	H - OH - PI	an #1				Crist	Bits Error: 0.00
survey Prous	an U.M	vo Julia	<i>*</i>		100						in Protection of Confision	Other	Site Error (2:00 Wetl Groor (2:00 Warring)
i Helere	140 (d)	. 001	4 11	Sami Marse		4.00	Onu	HICO THE	. 1 1 E		17 两小百百	0.04	建设计
led tured		Monstered	Vental ?	Reference	Offset #	Datwing	Pall-Wall	Batween	Minimum 👉 Bepara	ition Ru	had Protection	17.0	Warriers - 1
Cepth (inst)	Depth (mark)	Cepth	A Delith			Centres	Contance		Bassiation Fact	Se Belle	ration 🖟 el Collisio		
	(man)	(ush)	(usn)	(unit)	(ustt)	(unfi)	(ush)	(dsff)	(int)	Pa	etor	1.1	10.00
1001455	9,648,77	9 772 35			39 42	1 03-1 36	1,034 36	963 22	71 14 14 540		* 1 m 1E+9	and the same of	CONTRACTOR AND
10 100 00	9.848.25	10,757,37			38 98	1.005 75	065 75	1,001 39	64 39 116 958	, o	4.1 to 16+9		
10,200 00	9,650 00	10 057 33			36.61	1,002 99	1,002,85	966 67	64.32 16 527	" D	* 1 m 16-9		
10,300,00	9 651 74	10,657 20	10,231.23	35 75	35 65	1,000 23	1,060 23	265.83	64 41 ,18 467.		€ 1 8 1E+9		
10,500 00	9 655 23	11,057,25			38 80	1 057 46	1,057.48	992 85	64 82 16 364		* 1 m 18-9		
A 12000					38 60	1,054 72	1 054 72	989 75	64.97, 18.235	0	• 1 in 16-9		
10 600 00	9,556 00	11,257,17	10.231.29	36 26	38 69	1,051.90	1,051.98	986.57	65 44 16 076		4.1 m 1E+9		
30 700 DO	9,658 72	11,357,13			38 86	1 049 20	1,040 30	983 17	65 03 15 889		< 1 in 1E+9		
10 800 00	9 660 47	11,457,10			22,19	1,046 44	1,000 44	979.70	66 /5 16 676		1.1 m 1£15		
10,900 00	9 682 21		10,231 34		39 60	1,043 68	1 043 68.	976 11	67.58 ,15 444	O	* 1 m 1E-5		
11,000 00	5 643 50	11,657,02	10,231.35		40 00	1,040 93	1 040 93	972 40	GS 52 15 191	. D.)	<1 m 1E-9		
11,100 00	9,665,70	11 756 96	10 231 37	38 57	40 64 :	1,008 17	1 036.17	908 59	69 57 14 922	,a:	4.1 at 1E+9		
11 200 CD	9,667,45		10,231.39		41 29	1 (35 41	1,035 41	984 148	20 73 14 009		< 1 in 1E-9		
11,300.00	9 669 19	11,956 90	10,231 41	39 94	41 95	1 032 65	1,032 68	⊕ G6Q 67	71 90 :14 346		<1 m 16+9		
11,400 00	9,570 94	12.056 87			47 72	1,029 83	1,025 89	950 57	73.34 14.044	6.0	4.1 at 1E+9		
11,600 00	5 672 65	12, 156 83	10,231,44	41.52	43.51	1.027.14	1,037,14	952 37	7476 13 739		4.1 m 1E+9		
11,500.00	9,074 43	12,250 79	10 731 46	27.18	44 33	1,024.38	1,024 38	548 10	76 22 13 429	225	- c/17		
11,700 00	9,678 17.	12,356.75		42 38 43 29	40 23	1,021 62	1 021 62		77 56 13 138	0	• 1 o 1E•9		
11 800 00	9 677 62	12,456 71		44 25	48,15	1.018 86	1 018 80	933 31	79 55 12 50à	0	4 1 an 1⊡+0 4 1 an 1⊡+0		
11,900 00	9.679.86	12,556 67		45 24	47,11	1,016,11	1 016 11	934 82	81 29 12 500		* 1 m 1E+9		`
12,000 00	9,661 41	12,050 64		40 27	48.1D	1.013 35	1,013.35		63 (4) 12,195	0	< 1 on 16-9		
12,100.00	a bidd and												
12,200.00	9 683 16 9 684 90	12,756 60 12,658 56		47 34 ; 48 43	49 13	1,010 59	1,010.59	\$25 63	34 96 11 895	0	< 1 m 1E-0		
12,300 00	9 666 55	12,056.52		49.56	50 00	1,007 63	1,007 43	620 95	86 85 11 590	5	+1 m 16+9		
12 400 00	9 668 38	13,056 48		50.72	51 79 52 41	1,002,08	1 002 32	916 21	88 80 11 310	O	€ 1 in 1£ i9		
12,500 00	9,850 14	13 156 44		51.91	50 55	999 5G	999 56	905 59	90 00 11 007 92 97 10 752	.0	e tan te-B		
				,					28% BC 218 125	.0	4)1 my 1E+3		
: 2,000 00	9 691.88	13 256 41		53 12	64.73	996 60	0.6 6.0	931.72	95 09 10 433	0	< 1 m 1E+9		
12,700 00	9 653 83			64.35	55.92	994.05	904 05	893 aq	97,78,10 222	0	* 1 in 1E+9		
12 800 00	9,095-37	13,458 33		65 69	57 14	(4) 1 20	901 29	891.84	99 45 9 966	ü	≤ 1 en 1E • 9		
	9.697 12 9.698 86	13.558 29	10,231 76	56 88	56 38	986 53	988 53	886 85	101 63 9 722	10	4 1 m 1E • 9		
13 000 03		13,536 35	10,231.36	56 17	50 63	945 78	955 76	- 881 B2	103 95 9 463	0	« t er 1E+B		
13 100 00	9 700 61		10,231,72	50.43	.60,91	983 02.	, 983 02 ;	678 77	106 28 28 251	-0.5	4 1 m 1E/9		
13.200.00	9,702.35		10.231.74	60.91	62 20	980 26	950 26	671 68	105 59 9 927	D.	• 1 m.1E•9		
13,300 00	9.704 to	13,956 14		62 35	ii3 51	977.51	977.51	866 55	110 36 -8 811	0	+ 1 m 1E + 9		
13 400 00	9 705 84	14 055 10		£3 ≲ t	64 63	97-175	074 75		113 33 , 5 601 ,	.0	* 1 m 1E+9		
13,500,00	9 707,50	14,156.06	10 231.79	64 88	60 17	972 00	972 00	858 75	115 74 8 398	(O)	4 t m 16-9		
13,600,00	9,709 33	14 256 02	10 231 81	06:27	67.52	969 24	1969 24.	851 08	118:16 8 202.	104	36.1 in 1E.0		
13,700.00	9711 08		10 201 83	67.66	63 83	G58 45	008 48	845 85 ::	120 63 8 012	٥.	1 m 1E+9		
13 500 00	9.712.82	14,455 94	10 231 84	69.07	70 26	953 73	903 73	8 40 62	123 111 7 878	ă	4 1 m 16-9		
13 900 00	9 714 57		10,231 86	70 45	71 65	960 97	6ED 97		125 61 - 7,651	0	4.1 dy 1E+8		
14 000 00	9,716 31	14 655 87	10 231 69	Z1 92	73 05	968 22	658 22	£30 00 .	120 12 7 479	, 3 .	e i et 1E+9		
14 100 00	971808	14,755.43	10 231 90	7 3 35	74.45	955 40	955 46	824 51 3	130 05 7 313	:0			
14,200,00			10 231 91	74 50	75 87	952.70	952.70		133 20 7 152	.0	1 in 16-9		
14 300 00			10 231 83	76.25	77.30	549.95	949.95	914 13	135.77 6 797	ő	ne tan 1E es		
14 400 00			10 731 93	17,72	78.73	047,19	947,19	508 65	136 35 8 647	ă	_ 51 in 1€+9		
14 500 00	9,725.04		10,231.67	79 15	80 18	944 44	941 44	863 50	140 94 6 701	ő	4 1 m 1E-8		
14 800 00	ri Your Re	72.7	40.034.63	80.55	12.2	Adama	201	1000	45 F 10 10 Ave	- 7	e i m i E-B		
14 800 00	9,726 79,	15 256 54			81 63	941 68	841 18	755 14	143 56 6 580	9	< 1 m 1E+9		
14725 22	9,729,53		10 233 00	62.14	63 07	638 83	\$38 93	192 17	146 18 6 424	q	in tere		
14 728 85			10,232 00	67,62 82 54	43 07 43 07	936 59 938 59	938 59	792 10		.0	* 1 m 1E-8	+122.	
7 44 44	7	, at 100 7 90	4,000,00		23407	9.30 24	936 19	792.15	146 44 6 400	.0	. €1 m 1E+9	55	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation Page 20





4 5 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3		_								<u>.</u>												<u></u>					•															<u></u>										- 4
at Well Error	A TOTAL STATE																						8							8 P.																						
j. 8																	1	Tarres .	Level 3			3	Lovel 2	Cavel 2	(F)	2 2		1	7	Lines 2			Level 2	9		Con 2	Evel 3	100		Lave 2	19.49	7 7	i i	Level	1	1	Cerel 2	94	- Tare	2 5	Chinal 2	2 Per 9
Protecting of Course		9	1 11 15 49	, a	0.31	: 4	6.11	5 H		10.00	4 1 m 16 m	6-U.		11			6.3m 16.9	R491 1947	0.31 C	5 5			- 1€	Ξ.	£ ,	10.0	1 0 0	10.0	9 Jul 16-9		7 1		Com 1E-B	0.016.0		. 5	. im 15.9	1 m 16.6		200	S	e in Tere		. in 1E+9				- 71	5	in Est	Ē.	cin 16-0
				-	3'0	7 0	· •	00		:/da	, ta	0.0	2.5	Ţ.			9	· ·	0		· a	ià	á					5 6					g				0	0.4			•	ė e		ä					6			0.0
Patricia	5	7.80	100	1,75	1961		1379	3765	287	2 603	7	2 3		4 10.0	9	909	2	·	£.			1193	7	11.11	9		5	ı	121	98				8 8			180	200		1 1	100	3		2	100	1.30	8	ŭ	5	3 85	100	28.
1						365	192	R E	9	4	2	9	2		17.	2	2 5	2	8 9 7 9	9 6	3.5	16 150	17.35.71	5	1	10 22	4	1.0	3	e a a			3	2 E	100	8	30.53	3 S	91	1 H	9	8 8	3		9 2 7 7		2 4	25.74	2	3 9 3 9	3 3 40	8.8
Editor.		10.74	10 02	2.5	32	16.10	¥.	2.5	8	1287	8		2	100	22	3	3 :	9 1	Ç.	2 6	9	3	3.5	8	3 9	6		9	6	0 0 0 0		2	900	3 4	. 4	9	1.0	2.5		6	338	8 6		9.	0 0	e.	99.5	8	2.3	2	1,58	8 8
	1	÷	g.	4 5	1	14	Ξ.	===	i ii	:h	Ĕ.	ξÝ	/#	:=	: =	iź.	rija	: :	2 12	2		2	ž	ğ.	œ 3	i n	3	1 1	Ž.		: 2	9192	4	5.0	1 3	ě	28	g i	9. 6	p c	e	(g) '9		Ŷ,	g., q	en.		Ö	ñ,	Chi	~	.No

Hawkeye Directional Anticollision Risk Report

Color, CHEEL COLOR SEE MANAGEMENT COLOR SEE CO	Well Goonan Fed Cam 04 222H	GL 3013 8' + 25' KB @ 3038 B0Hsft	GL 3013 8 + 25 KB @ 3038 60ush	Grid	Minimum Curvature	2.00 sigma	HED Company DSN	Offset Datum
	Local Co-ordinate Reference:	TVD Reference:	MO Retronce:		Survey Calculation Method:	連続で	Database:	Offset TVO Reference:
	lovo Oil & Gas, LLC	ddy County, NM	EC 4 : T23S - R28E	88	donch Fed Com 04 222H	8		lan #1

inter manasi kanpa, nekab	ලේක්කුකු "සුසුගුළුය. යන්සරාය	රැවිත විශූලාක, පම්මාවිත	engo, ocaño	nen, nenna	กซเลล์ส	* m & D	.0		e co , co	ı ni ni	, rive	n n n	N . W	ife fei	,	(eile	(A. 6)	(n) ;i											-	The second secon	COMPASS 5000 15 Bulld 91
							E-9 Lond 2			5 E-S	1 **	prof se	200		6-9 6-8 6-8 7-9 7-9 7-9 7-9 7-9 7-9 7-9 7-9 7-9 7-9	** *	6-9 Level 2		E	**	6.0		ę.	* 0	e e	er:	, m	w.w.	on a co	Ged	5
	(5) \$ \$ \$ \$ \$ \$ \$ \$ \$ \$		¥.	5	15 5 E					5.5		S 6 1	6 G		 	6 5 6 5	- 15 m	€ 1 7 7	9.4		6.81		E .	24.1 B. 18.9	5 5.	S	E E		3.00.00	110	ellipse separan
0.00	,	(0.0	် <u>ချ</u> င်း	30	9 0 0	0,0	9.6	6 . 9	00	0 0	.,0,0	5.0 c	9.0	ő,ő	o o o	,6,6	9 0	م نه	, e. e	0.0	0,0	i o o	ÇO.	9,0:	o, a.	PJ 5	g go	0,0	a - c	- Constitution	ES-min
÷	2 2	** ** *	25.5 25.5 25.5 25.5 25.5 25.5 25.5 25.5	58.02 (222)	5 6 8 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	8	 			ST 1 27 28	20 E		S 15 (ST)	70 X 05 20 1 20 0	71 4 100 71 0 1 102 102 102		71 23 1003	7072 1167	3 2 3	200	56.36 1543	67 67 2 258	67 75 2 B-C	67.69.3100	51 62 5 681 51 62 5 385	67.61-4.300	67 61 4 959	0.65 0.65 0.65 0.65	07.61 6.000	57.00 67.2	min eeparation factor.
9 9 9 0 0 0	8 9 0 8 4 8	E 0 3	9 2 2	13.10	2 2 2 2 2 2	2 5	R 2	8 9	- 2	7. 19 20 ~	2	9 to 10	10.	9.0	588	25	6.0 5.0	8	9 8	E S	3.5	100 03	174 80	5 50 50	2 E	8	3 E	8.3	=	1 63	SF - min se
	8 8 8 9 2 2		3 6 5		E A S		2 Q			7 Z					2 4 B 2 7 Z		2 2 2 2		3	12:03	22.72 25.72	35.5 8.65	19264	2 S	2 8 8	3	2 45	38.50	0.00		Page 22
783 783	288 261	853	38	8:8	222	. X.2	22	G	2.2	2.2	, a ;	22	ig :	22	4 4 B	22			A.	i e 6 9 6	E 97	15 E	102.64	2 2 2 0	ı ş	8	, A	4 8. 2 5	9 8	25.5	ance of cove
985	2 % 4 2 % 5	8 5 8 7	8 A A A	2 2	8 2 5	1.5	2 B	A . 8	5 R	9 P	3 3	: 8 5 ; 3 5	8	2 2 0 2	8 8 2 8 8 9	88	# 9	9	8	5 2	88	8 =	37.16	8 A	R A A A	ž .	8	7 W	3) (S	3	fer distar
e e e nar	527 886	2 7 8 5 8 6	8 A	8.8	3 5 8 9 9 5	9.5	2 5	8 . 3 H . H	5 E	83	. 6 7 . 8 3	8 8 8 8 8 8	en UB	8 E	2 2 2 3 2 2 8 2 8	82.5	8 B	8 8 8 8	1.43 3.83	7 3 3 7 8 8	8.8	8, E	8	* # # :	8 R	ន: : ន: :	8	F 5	3 (8 4 (8	0	centre to cen
67000	2 2 3 3	6, 206 95	6 CEO 90		7 8 8 7 8 8		7,005 20	7,005 68	8,193 ce	2 55 52 5 52 52 50 50 50 50 50 50 50 50 50 50 50 50 50	8 455 68	1000	500	89 505 B	2017 2019 2019	9 245 56	6.234.40	2000	3	7 6	2027	9 508 00	7. 2.	33	200	200	200	18 000 81	2 5	P.	5.
1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	6 15 3 8	6 795 20 6 885 19 6 860 18	7.096 1	7,196 92,	3 8 8	7,000,7	7,000,7	1700.71	5 200 M	8,500 34	A 200 24	7 00 4 4	9,000	9 6 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5	9 275 %	9,225 14	0.374.47	0.55.9	8	45 ELS V	6 255 B	9,084,28 9,012,33	8 850	2 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	8 8		91.0	12	9 07 6		iii.
100 M 100 M	6 506 23 6 606 23 6 606 23	2 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6			28 8 8 8 9	المهاد شواء	N. N.	سرالا سنو	· 100 (100 -	0.0	28 55	2 SEC 12	90.00	90 000 B	6 17 08 156 07	9,245,75	9 294 60	9,378.54	200	88	9 471 18	4 508 20	D.	2 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	74 CO	a		a cs	2	0	33.27PM
	6 700 00 00 00 00	5 800 00 6 900 00 6 955 00	00 000	7,200,00	888	7,600 00	7, 900-00	9 90	DE 200 UN	8 500 to	8 800 00	8 800 00	00 000 6	9 00 0	2 5 5 2 5 5 2 6 8 3 6 8	9 350 00	0,400 00	9.459.00	9517-6	8 8	95750	9 625 00	9,675,00	97250	88	8 8	000	000006	2000	297500	06/09/19, 8:33:27PM



ial Co-ordinate Reference:
D. Reference:
Reference:
Ith Reference:
proy Calculation Method:
but crors, are at labbase:
set TVO Reforence:

Well Goonch Fed Com 04 222H GC 3013,8 + 25 KB @ 3038 80ush GL 3013,8 + 25 KB @ 3038 80ush Grid

Minimum Curveture 2.00 sigma HED_Compass_DSN Offset Datum

- C	n #1	and an in a large and			Offset Site Error: 0.00 upt
Pia	Π₩Ι Neerinterascop	makana arkani di ina manana makan	rather and the second	annicht weiter die geschieden der eine der eine der	Green Site Eyror: 1 0.00 us/
100		545 10 51520	100		Officet Well Error: 0 00 ust
ister	200	74. Juni 12 a 15 a 14			The second
	Between ?			sked . Probability	Werning We
82	Elipses ?	Beparation Fact	or Ber	gration of Contion	A STATE OF THE STA
1.	(ineff)	C luming C		actor,	Table 1 to be seen to be
0	411 50	67.60 7.087	\ D	4 1 to 1 F = 0	The Control of the Co
10	426 29		. 0	* 1 m 1E+9 * 1 m 1E+9	
4	510 56		Ó	* t et 16-9	
12	583.17			<.tin 15-9	
15	501,10		0	1 m 1E-9	
0	518 31		0.	• 1 in 1E+9	
	4.5				
<u>ā</u> ;	578.79		107	< 1 m 15+9	
3	574 56		. 0	<1 m 16-9	
8	509 87		.0	< 1 m 1E+9	
				< 1 in 1819	
3	567,60	45 03 13 605	400	* 1 m 1G+9	
9	565 19	45 89 13 315		4 1 m 19 · B	
5	562 /5	45.50 13 025	O.	4.1 m 1E-9	
J.	560 27			= 1 m 1E+9	
8	557,75			< 1 in 1619	
5	555 70	49.75 12.160	.0	<.1 in 1E+9	
2.	552 62	50.60 11.677	for	33160 B+9	
ō.	550 01		8	c1 in 16:0	
g.	547.37	53.01: 11.336	0	1 in 1E-0	•
e e	544 70		0	C1 m 1E-9	
5	542 (21	55 34 10 795	10	• 1 in 1E-9	
	6,11,000	 and controlling of a rest controlling 	140,5		
4.	539 30		D	< 1 in 16+8	
3	536 58	57 77 10 258	20	<1 in 16+0	
3.	531 03		.0	<.1 in 1E+9	
1	528 23	61,01, 9,574	0	1 in 16+8	
			n	1 m 1E-0	
5 7	525 42	62 93 / 9350	0,	4.1 m 16-9	
ō.	522 59	54 27 . 9 131	100	c 1 in 1E+9	:
7	519 74	65 63 6 919	0	c.1 in 15.8	
4	518 87		.0	4 1 81 1E+8	
	513 29	58 WZ 8 513	0	4:1 in 1E+8	
1	511.10	09 84 8 31a	O	5 1 m 16-9	
\$	505 19	71.27 (1.130)	o.	e 1 m 10 - 3	
0	505 27	72 73 7 948	o.	4.1 x 1E+B	
4.	507 34	74 20 1 770	D	, 1 an 1E+9	
0.	41/2 40	75 68 -7 590	0	e.1 m 1€+9	
25	220.00	Sec. 20	64		
25	493 47	77,18, 7,432 78,70 7,970	0	<.1 kg 1ۥ8	
	490 50	d0.23 7,114		- 1 m 16-9 - 1 m 16-9	
8	487.51		.0.	₹1 m 1⊞•9	
1	464 51		ŏ	< 1 an 1E+0	
					1
1	481 50	84 91 0 671	0	• 1 n 1E-9	
87	478 48		63	4 1 m 16-9	
5	475 45	68 10 6 397	0	4.1 to 1E-9	
2	172 42	89 71 6 250	, u	∘ 1 m 1€+9	
í	469.37	91,34-8,1397	10	4.1 m 16+8	
à/	450 31	92 98 6 Q15	ò	4 1 m 18+0	
8.7	463 25		Ö,	e 1 m (E+9	
7	400 18		- 6	* 1 in 1Ev8	
à ·	435 35		įū.	- 1 in 18+9	
79	422,54	The same of the same of		- ಉಂಘರ್ಷ	

Hawkeye Directional Anticollision Risk Report



Company: Novo Oil & Gest LLC
Project: Eddy County, NM
Reference Site: SEC 4 - T23S - R28ESite Firer: 0.00
Reference Well: Goonch Fed Com 04 2:
Well Error: 0.00
Reference Wellbore OH
Reference Design: Plan #1

Goonen Fed Com 04 222H


Local Co-ordinato Reference:
TUP Reference:
MD Reference:
North Reference:
Survey Calculation Method: Output errors are at Database:

Well Goonch Fed Com 04 222H GL 3013 8' + 25' KB @ 3038 80ush GL 3013 8' + 25' KB @ 3038 80ush Grid Minimum Curvature 2.00 sigma HED_Compass_DSN Offset Datum

Reference Depths are relative to GL 3013 8 + 25 KB @ 3038 8Qush Offset Depths are relative to Offset Datum

Central Mendian Is 104" 20" 0,000 W

Coordinates are reletive to: Goonch Fed Com 04 222H Coordinate System is US State Plane 1983; New Mexico Eastern Zone Grid Convergence at Surface is: 0.13

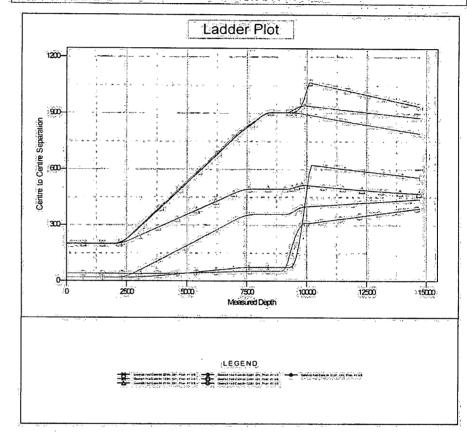

ıt, SF - min separation factor, ES - min ellipse separation

COMPASS 5000 15 Build 91


CC - Min centre to center distance or covergent point; SF - min separation factor, ES - min ellipse separation

Page 24



Well Goorde Fed Com 04 222H
G. 3013.6 + 25 KB @ 3036.60ush
G. 3013.6 + 25 KB @ 3036.60ush
Grid
Minimum Curvature
2.00 sigma
HED Compass DSN
Offset Datum

ordinates are relative to Goonch Fed Com 04 222H ordinate System is US State Flane 1983, New Mexico Eastern Zone of Convergence at Surface is: 0.13*

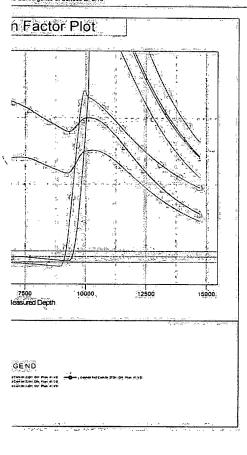

DRILL PLAN PAGE 1

fee/fee/Fed

Drilling Program

1. ESTIMATED TOPS

Formation Name	TVD KB	MD	Bearing
Quaternary:	0′	0,	water
Rustler anhydrite (surface csg @ 594' MD)	100′	100"	N/Ā
Castile gypsum	970'	970'	N/A
Lamar limestone	2473′	2476	N/A
Bell Canyon sandstone	2539"	2542'	hydrocarbons
Cherry Canyon sandstone	3614'	3641'	hydrocarbons
Brushy Canyon sandstone	4627	4676"	hydrocarbons
Bone Spring limestone	6070′	6152″	hydrocarbons
Avalon(shale	6578'	6671'	hydrocarbons
1 st Bone Spring sandstone	7037	7140′	hydrocarbons
2 nd Bone Spring carbonate	7250'	7354'	hydrocarbons
2nd Bone Spring sandstone	7785'	7889′	hydrocarbons
3d Bone Spring carbonate (inter. csg @ 8900' MD)	8082"	8186′	hydrocarbons
3 rd Bone Spring sandstone	9016'	9120'	hydrocarbons
(KOP	9169'	9273	hydrocarbons)
Wolfcamp XY carbonate	9340'	9437'	hydrocarbons
Wolfcamp A carbonate	9496'	9633'	hydrocarbons
Wolfcamp B carbonate (pro. csg @ 14727' MD)	9704′	13300'	hydrocarbons
TD	9729'	14727'	hydrocarbons

2. NOTABLE ZONES

Wolfcamp B carbonate is the goal. All perforations will be ≥ 330 ° from the dedication perimeter. Closest water well (C 00800) is 0.87 mile southeast. Water bearing strata were found from 50' to 1.55' in the 200' deep well.



DRILL PLAN PAGE 2

fee/fee/Fed

3. PRESSURE CONTROL

A 13.625" 5,000-psi BOP system will be installed on a multi-bowl (speed head) wellhead with a 13.625" flanged casing spool. Top flange of casing spool will be set in a cellar below ground level. BOP system will consist of a single pipe ram on the bottom, mud cross, double pipe ram with blind rams on bottom and pipe rams on top, and annular preventer. Blowout preventer will be installed on top of the 13.375" surface casing and will remain installed to TD of the well. Wellhead, blowout preventer, and choke manifold diagram are included.

BOP system will be isolated with a test plug and tested by an independent tester to 250-psi low and 5000-psi high for 10 minutes. Variance is requested to use a co-flex hose between the BOP system and choke manifold. A typical co-flex pressure test certificate is attached. An equipment specific co-flex pressure test certificate will be on site when testing the BOP.

All casing strings will be tested in accordance with Onshore Order 2 III/B.1.h.

4. CASING & CEMENT

Variance is requested for an option to use a surface rig to drill the surface hole, set the surface casing, and cement the surface casing. If the schedule between rigs would preclude presetting the surface casing, then the primary rig will MIRU and drill all of the well.

All casing will be API and new. See attached casing assumption worksheet.



DRILL PLAN PAGE 3

fee/fee/Fed

Hole O, D,	Set MD	Set TVD	Casing OD	Weight (lb/ft)	Grade:	Joint	Collapse	Burst	Tension
17.5"	0' - 594'	0' - 594	13,375" surface	54.5	J-55	BTC	1.125	1.125	1,60
12.25	0′ - 8900'	0' - 8796'	9.625" intermed.	43.5	HCL- 80	BŢC	1.125	1.125	1.60
8.5"	0' - 14727'	0"- 9729'	5.5″ product.	20	P≈1.10	TMK DQX	1.125	1,125	1.60

Alternate Production Casing:

Hole O. D.	Set MD	Set TVD	Casing OD	Weight (lb/ft)	Grade	Joint	Collapse	Burst	Tension
8.5"	0' - 14727'	0′.– 9729′	5.5″ product.	20	P-110	«GBCD	1,125	1.125	1.60
8.5″	0' - 14727'	0''- 9729'	5.5″ product	20	P-110 HC	CDC	1.125	1.125	1.60

Alternate weights and grades could be substituted to meet maximum stimulation pressures.



fee/fee/Fed

Name	Type	Sacks	Yield	Cu. Ft.	Weight	Blend
Surface	Tail	509	1.62	824	13.8	Class C + gel + accelerator + LCM
TOC≔GĹ		1	00% Exce	ŚŚ	Cent	ralizers on every it to GL
Intermediate Stage	Lead	690	2.28	1573	11.9	Class C or H + fluid loss + retarder + LCM
*1	Tail	200	1.34	268	14.8	Class C or H + fluid loss + retarder + LCM
Intermediate Stage	Lead	542	2.28	1235	11.9	Class C or H # fluid loss + retarder + LCM
* 2	Tail	200	1.34	268	14.8	Class C.or H + fluid loss + retarder + LCM
TOC = GL			20% Exces	Š		lizers on bottom 3 jts and entralizer every 4th jt to GL
Production	Tail	920	1.89	1738	13.0	Class H + fluid loss + retarder + LCM
TOC = 8400°	**************************************	.2	0% Exces	S	Mental Constitution of the	None planned

^{*}Stage tool set at ≈4000'.

5. MUD PROGRAM

Eddy County, NM

An electronic PVT mud system will monitor flow rate, pump pressure, stroke rate, and volume. All necessary mud products (barite, bentonite, LCM) to control weight and fluid loss will be on site at all times. Mud program may change due to hole conditions. A closed loop system will be used.

Туре	Interval (MD)	lb/gal	Viscosity	Fluid Loss
fresh water spud	0! - 594!	8,3	30 - 60	NC
brine diesel emulsion	594' - 8900'	8.8 - 9.2	35 - 45	, NG
OBM	8900' - 14727'	8.8 - 12.5	35 = 65	4 - 6



DRILL PLAN PAGE 5

fee/fee/Fed

6. CORES, TESTS, & LOGS

No core or drill stem test is planned.

A 2-person mud logging program will be used from ≈3000' to TD.

GR log will be acquired by MWD tools from the intermediate casing to TD.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is ≈ 5.177 psi. Expected bottom hole temperature is $\approx 1.65^{\circ}$ F.


An H2S plan is attached.

8. OTHER INFORMATION

Anticipated spud date is upon approval. It is expected it will take ≈3 months to drill and complete the well.

Novo owns fee leases in the S2 Section 4. Novo has NMOCD approval to be the operator in the W2 Section 4 via NMOCD Case 20184 and R-20578.



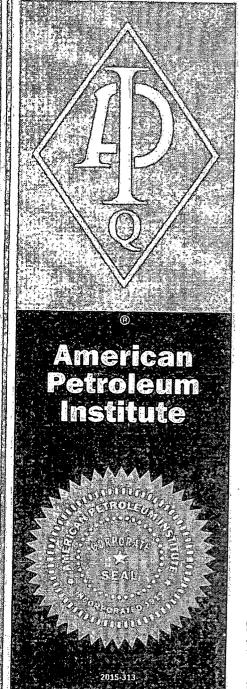

Certificate of Authority to use the Official API Monogram License Number: 16C-0383

original original

The American Petroleum Institute hereby grants to

750 S. 59th Avenue Phoenix, AZ

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and API-16C and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: 16C-0383

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.


The scope of this license includes the following: Flexible Choke and Kill Lines at FSL 0, FSL 1, FSL 2, FSL 3

QMS Exclusions: No Exclusions Identified as Applicable

Effective Date: MARCH 28, 2017 Expiration Date: APRIL 21, 2019

To verify the authenticity of this license, go to www.api.org/compositelist.

Vice President, API Global Industry Service





Phone 713-644-1491 Fax 713-644-9830 www.copperstaterubber.com sales@copperstaterubber.com

February 23, 2018

Independence Contracting Drilling 11601 N. Galayda St. Houston, Texas 77086

Subject:

Purchase Order No.: PO00116446

Date: February 23, 2018

Specialties Company File No.: CSR / SPECO-81069

Equipment:

Copper State Rubber Choke/Kill Hose Assembly, 10KSI MAWP X 15KSI

T/P, API 16C FSL3, Fire Resistant Cover, Complete 4-1/16" 10KSI MAWP Flange With BX155 SS Lined Ring Groove Each End. H2S

Suited.

1EA: 3" ID X 75Ft. S/N-33851

CERTIFICATE OF COMPLIANCE

This is to certify the above referenced equipment meets or exceeds the following requirements and were manufactured from same material specification and manufacturing methods as prototype assemblies for referenced specifications.

COMPLETE HOSE ASSEMBLY I.

API Certificate of Accreditation for Spec: Q1 (Quality Programs) and A. Spec.: 16C

1 Copper State Rubber, Inc. Certificate No.: 16C-0383

CSR Specification No.: 090-1915C B.

PHYSICAL/CHEMICAL PROPERTIES OF METAL COMPONENTS П.

API Spec. 6A, latest edition A. API Spec. 16A, latest edition B.

NACE Standard MR0175, latest edition Ć.

WELDMENTS/NDE REQUIREMENTS III.

Section IX, ASME Boiler & Pressure Code, 1986 Ed., A. 1987 Add.

CSR/Specialties Company WPS/PQR Nos.: 911171-1, B. and 911171-2, Rev. 05 dated June 2005

III. WELDMENTS/NDE REQUIREMENTS (continued) C. API Spec. 6A, latest edition

C. D.

API Spec. 16A, latest edition

Sincerely,


Joe Leeper, Technical Department



Visual Inspection / Hydrostatic Test Report Manufacturer Copper State Rubber Inc. Hose Type Choke and Kill Pressure Rating 10,000 PSI MAWP X 15,000 PSI T/P Spec Number 090-1915C-48 FSL Rating FSL 3 Serial Number 33851 Size ID 3" Length 75 Date December 9, 2017 Shop Order Number 31162 Connections Description: 4 1/16" 10K API FLANGE WITH SS INLAID BX-155 RING GROOVE EACH END Traceability of Terminating Connectors Insert Male Nut Female Flanges Hubs Other Connector 1 14C1 V4760 CSR-H1263 Connector 2 14C1 V4760 CSR-H1265 Comments Calibrated Devices Pressure Recorder 07459 Calibration Date 1/23/2017 Pressure Gauge 111291-2 Calibration Date 1/23/2017 *This report signifies that the product has been visually inspected for defects in the interior tube, recess, gasket, cover and branding and all have been found to be conforming. Comments Hydrostatic Testing Requirements Length after test 60 Min @ 15,000 psi (-0/+500 psi) 75' OAL hil Snider Witness By: Supervisor

> INDEPENDENCE CONTRACT DRILLING P.O. NO.: PO00116446

DATE: FEBRUARY 23, 2018 FILE NO.: CSR / SPECO-81069

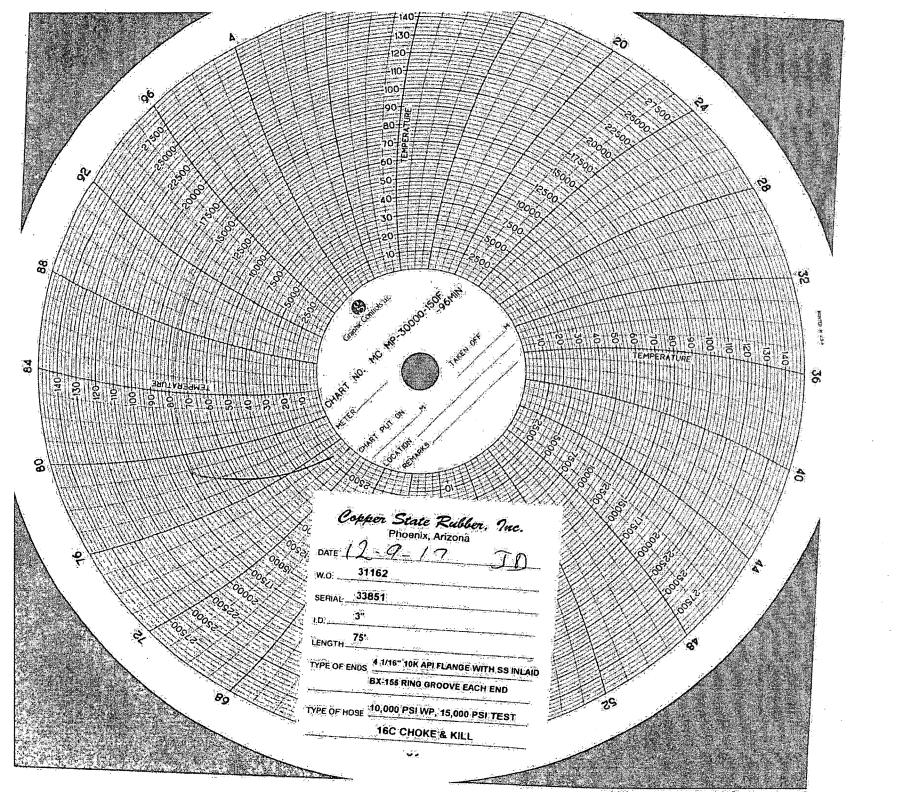

Novo Oil & Gas Northern Delaware Goonch Fed Com 04 Casing Variance Request

A variance is requested for an option to use a surface rig to drill the surface hole, set the surface casing, and cement the surface casing. If the schedule between rigs would preclude presetting the surface casing, then the primary rig will MIRU and drill all of the well.

Gnooch Fed Com 04 222H Alternative Casing Spec Request

Novo Oil & Gas Northern Delaware, LLC respectfully requests flexibility in the production casing spec in the event that drilling conditions and/or equipment availability determines the need for an alternate casing. The alternate casing specs are specified in the attached drill plan. The alternate casing spec sheets are attached.

GB Connection Performance Properties Sheet

ctions

Rev. 1 (08/25/2015)

Casing: Casing Grade: P-110

5.5 OD, 20 ppf

Connection:

GB CD Butt 6.300

Coupling Grade:

API P-110

	PIPE BODY GEOMETRY	
Nominal OD (in.)	5 1/2 Wall Thickness (in.) 0.361 Drift Diameter (in.) 4.65	3
Nominal Weight (ppf)	20.00 Nominal ID (in:) 4.778 API Alternate Drift Dia. (in.) N/	A.
Plain End Weight (ppf)	19.83 Plain End Area (in. ²) 5.828	州 多花

	electric of the second	PIPE BODY PERFOR	MANCE"	A STATE OF STREET
Material Specification	P-110	Min. Yield Str. (psi)	110,000 Min. Ultimate Str. (psi)	125,000
Collapse	galicina principals, etc. Spinor gaginamity of pro-	Tension	Pressi	ire
API (psi)	11,100	Pl. End Yield Str. (kips)	641 Min. Int. Yield Press. (psi)	12,640
High Collapse (psi)	N/A	Torque	Bendi	
•	Į.	Yield Torque (ft-lbs)	74,420 Build Rate to Yield (°/100	ft) 91.7

	GB CD Butt 6.300 CO	UPLING GEOMETRY	· 原子是一种,他们不是一个
Coupling OD (in:)	6,300 Makeup Loss (in.)	4.2500	TORCE
Coupling Length (in.)	8:500 Critical Cross-Sect. (in.2)	8.527	

Material Specification	API P-110	Min. Yield Str. (psi)	110,000	Min. Ultimate Str. (psi) 125,000
Tension	7	Efficiency	**************************************	Bending
Thread Str. (kips)	667	Internal Pressure (%)	100%	Build Rate to Yield (°/100 ft) 80.0
Min. Tension Yield (kips)	891	External Pressure (%)	100%	Yield Torque
Min. Tension Uit. (kips)	1,013	Tension (%)	100%	Yield Torque (ft-lbs) 31,180
Joint Str. (kips)	667	Compression (%)	100%	m om kom e mann sverim om til 1911. I sveri skriv sverim fra fra frek om kom han skrivet skrivet om han fra fr Til skrivet om kom fra
	Age of an analysis of the state of the	Ratio of Areas (Cpig/Pipe)	1.46	

	WAREUPTURQUE		· · · · · · · · · · · · · · · · · · ·
Min: MU Tq. (ft-lbs) 10,000 Max. N		20,000 Running Tq. (ft-lbs)	See GBT RP
The state of the s	Market and the state of the sta	The complete the state of the property of the contract of the	services continue along the surface management
		Max. Operating Tq. (ft-lbs)	* 29,620

Units: US Customary (lbm, ini, *F, lbf)

See attached: Notes for GB Connection Performance Properties.

GBT Running Procedure (GBT RP): www.gbtubulars.com/pdf/RP-GB-DWC-Connections.pdf Blanking Dimensions: www.gbtubulars.com/pdf/GB-DWC-Blanking-Dimensions.pdf

Connection yield torque rating based on physical testing or extrapolation therefrom

 $^{1 \}text{ kip} = 1,000 \text{ lbs}$

^{*} See Running Procedure for description and limitations.



U. S. Steel Tubular Products 5:500" 20:00lbs/ft (0:361" Wall) P110 HC USS-CDC®

MECHANICAL PROPERTIES	Pipe	∦-USS-CDC [®]	
Minimum Yield Strength	110,000	mm.	psi .
Maximum Yield Strength	140,000	429 177	psi
Minimum Tensile Strength	125,000		psi
DIMENSIONS	Pipe	USS-CDC [®]	
Outside Diameter	5.500	6:050	in
Wall Thickness	0.361		űnj.
Inside Diameter	4.778	4.778	in.
Standard Drift	4.653	4.653	in.
Alternate Drift	en e	₹ ₩.	(in).
Coupling Length	$\frac{\log k}{2^{\log k}} d$	9.250	<u>in</u> ,
Nominal Linear Weight, T&C	20.00	202	lbs/ft
Rlain End Weight	19.83		lbs/ft
SECTION AREA	Pipe	USS-CDC®	
Critical Area	5.828	5.828	sq. in.
Joint Efficiency	AND IN	100.0	%
PERFORMANCE	Pipe	USS-CDC [®]	
Minimum Collapse Pressure	12,200	12,200	pši
External Pressure Leak Resistance	-,-	9,760	psi
Minimum Internal Yield Pressure	12,640	12,370	psi
Minimum Pipe Body Yield Strength	641,000	(4)	Ibŝ
Joint Strength	u	688,000	. lbs
Compression Rating	777	413,000	lbs
Reference Length	estates signals	22,933	ft ^o
Maximum Uniaxial Bend Rating	744 34 45 1 3 3	59.1	deg/100 ft
MAKE URIDATA	Pipe	USS-CDC®	
Make-Up/Loss	e	4.63	în.
Minimum Make-Up Torque	200 0	10,500	fClbs
Maximum Make-Up Torque	NATE OF THE PARTY	13,000	ft ² los cocamo
Connection Yield Torque	722)	16:100	ft-lbs

Qiner than proprietary collapse and connection values; performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness and Specified Minimum Yield Strength (SMYS).

Legal Notice

USS: CDC (Casing Drilling Connection) is a trademark of U.S. Steel Corporation. This product is a modified API Buttress threaded and coupled connection designed for drilling with casing applications. All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

^{2.} Uniaxial bending rating shown is structural only, and equal to compression efficiency:

^{3.} Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make up torques may require adjustment based on actual field conditions: (e.g. make-up speed, temperature, thread compound, etc.),

^{4:} Reference length is calculated by joint strength divided by nominal threaded and coupled weight with 1:5 safety factor,

^{5.} Connection external pressure leak resistance has been verified to 80% API pipe body collapse pressure following the guidelines of API 505 Call II.



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

SUPO Data Repor

APD ID: 10400045326

Submission Date: 08/03/2019

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: GOONCH FED COM 04

Well Number: 222H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Section 1 - Existing Roads

Will existing roads be used? NO

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? NO.

Attach Well map:

Existing Wells description: FEE FEE FED - SUPO not required

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: FEE FEE FED - SUPO not required

Well Name: GOONCH FED COM 04 Well Number: 222H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: OTHER

Describe type: FEE FEE FED - SUPO not required

Water source use type:

OTHER

Describe use type: FEE FEE FED - SUPO not required

Source latitude:

Source longitude:

Source datum:

Water source permit type:

OTHER

Water source transport method:

TRUCKING

Source land ownership: OTHER

Describe land ownership: FEE FEE FED - SUPO not

Source transportation land ownership: OTHER

Describe transportation land ownership: FEE FEE F

Water source volume (barrels): 1

Source volume (acre-feet): 0.00012889

water source volume (barrels).

Source volume (gal): 42

Water source and transportation map:

Gnooch_Fed_Com_04_Fee_Fee_Fed_20190803130458.pdf

Water source comments:

New water well? N

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Well Name: GOONCH FED COM 04 Well Number: 222H

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: NO

Construction Materials description:

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: FEE FEE FED - SUPO not required

Amount of waste: 0

barrels

Waste disposal frequency: Daily

Safe containment description: FEE FEE FED - SUPO not required

Safe containment attachment:

Waste disposal type: OTHER

Disposal location ownership: OTHER

Disposal type description: FEE FEE FED - SUPO not required

Disposal location description: FEE FEE FED - SUPO not required

Waste type: DRILLING

Waste content description: FEE FEE FED - SUPO not required

Amount of waste: 0

barrels

Waste disposal frequency: Daily

Safe containment description: FEE FEE FED - SUPO not required

Safe containment attachment:

Waste disposal type: OTHER

Disposal location ownership: OTHER

Disposal type description: FEE FEE FED - SUPO not required

Disposal location description: FEE FEE FED - SUPO not required

Reserve Pit

Well Name: GOONCH FED COM 04 Well Number: 222H

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location?

Description of cuttings location

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Goonch_04_222H_Well_Site_Layout_Revised_20190930122208.pdf

Comments:

Well Name: GOONCH FED COM 04 Well Number: 222H

Section 10 - Plans for Surface Reclamation

Type of disturbance: No New Surface Disturbance Multiple Well Pad Name: Goonch Fed Com 04

Multiple Well Pad Number: 131H (Pad G)

Recontouring attachment:

Drainage/Erosion control construction: FEE FEE FED - SUPO not required

Drainage/Erosion control reclamation: FEE FEE FED - SUPO not required

Well pad proposed disturbance

(acres):

Road proposed disturbance (acres):

Powerline proposed disturbance

(acres):

Pipeline proposed disturbance

(acres):

Other proposed disturbance (acres):

Total proposed disturbance: 0

Well pad interim reclamation (acres): 0 Well pad long term disturbance

(acres): 0 Road interim reclamation (acres): 0

Road long term disturbance (acres): 0

Powerline interim reclamation (acres):

Pipeline interim reclamation (acres): 0

Other interim reclamation (acres): 0

Total interim reclamation: 0

Powerline long term disturbance (acres): 0

Pipeline long term disturbance

(acres): 0

Other long term disturbance (acres): 0

Total long term disturbance: 0

Disturbance Comments:

Reconstruction method: FEE FEE FED - SUPO not required

Topsoil redistribution: FEE FEE FED - SUPO not required

Soil treatment: FEE FEE FED - SUPO not required

Existing Vegetation at the well pad: FEE FEE FED - SUPO not required

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: FEE FED - SUPO not required

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: FEE FED - SUPO not required

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: FEE FEE FED - SUPO not required

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Operator Name: NOVO OIL AND GAS NORTHERN D	ELAWARE LLC
Well Name: GOONCH FED COM 04	Well Number: 222H
eedling transplant description attachment:	
Vill seed be harvested for use in site reclamation?	N
eed harvest description:	
eed harvest description attachment:	
Seed Management	
Seed Table	
Seed type:	Seed source:
Seed name:	
Source name:	Source address:
Source phone:	
Seed cultivar:	
Seed use location:	
PLS pounds per acre:	Proposed seeding season:
Seed Summary	Total pounds/Acre:
Seed Type Pounds/Acre	
-	
Seed reclamation attachment:	
Operator Contact/Responsible Offici	al Contact Info
First Name:	Last Name:
Phone:	Email:
eedbed prep:	
eed BMP:	
eed method:	
Existing invasive species? N	
Existing invasive species treatment description:	

Weed treatment plan attachment:

Monitoring plan description: FEE FEE FED - SUPO not required

Weed treatment plan description: FEE FEE FED - SUPO not required

Existing invasive species treatment attachment:

Well Name: GOONCH FED COM 04 Well Number: 222H

Success standards: FEE FEE FED - SUPO not required

Pit closure description: No pit

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: OTHER

Other surface owner description: FEE FEE FED - SUPO not required

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? N

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? N

Well Name: GOONCH FED COM 04 Well Number: 222H


Other SUPO Attachment

Novo Oil & Gas Northern Delaware LLC Gnooch Fed Com 04

Fee Fee Fed – SUPO not required

Novo's Goonch Fed Com 04 222H rig diagram



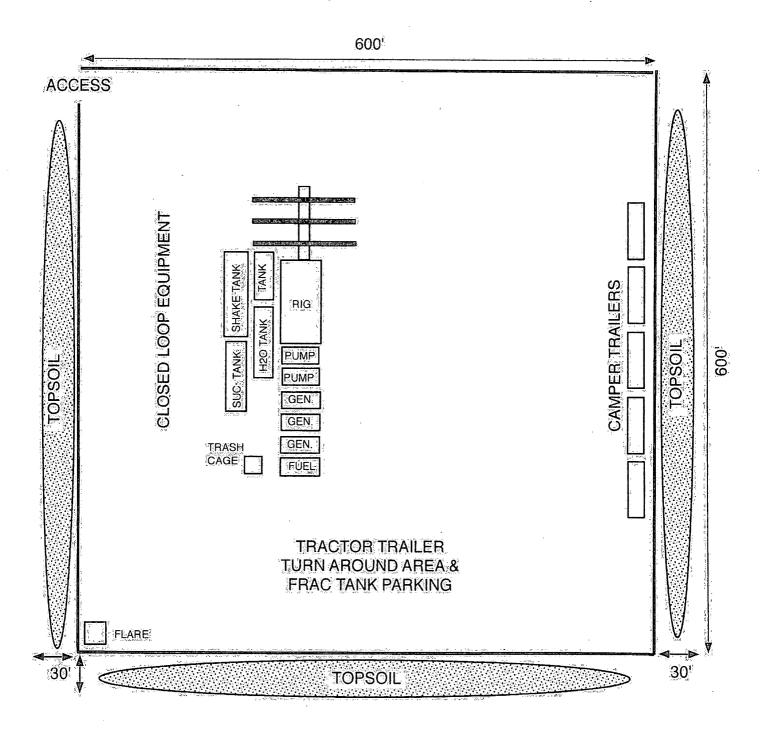





U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

PWD Data Report

APD ID: 10400045326

Submission Date: 08/03/2019

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Name: GOONCH FED COM 04

Well Number: 222H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachments

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC Well Name: GOONCH FED COM 04 Well Number: 222H Lined pit Monitor description: Lined pit Monitor attachment: Lined pit: do you have a reclamation bond for the pit? is the reclamation bond a rider under the BLM bond? Lined pit bond number: Lined pit bond amount: Additional bond information attachment: Section 3 - Unlined Pits Would you like to utilize Unlined Pit PWD options? N Produced Water Disposal (PWD) Location: PWD disturbance (acres): PWD surface owner: Unlined pit PWD on or off channel: Unlined pit PWD discharge volume (bbl/day): Unlined pit specifications: Precipitated solids disposal: Decribe precipitated solids disposal: Precipitated solids disposal permit: Unlined pit precipitated solids disposal schedule: Unlined pit precipitated solids disposal schedule attachment: Unlined pit reclamation description: Unlined pit reclamation attachment: Unlined pit Monitor description: Unlined pit Monitor attachment: Do you propose to put the produced water to beneficial use? Beneficial use user confirmation: Estimated depth of the shallowest aquifer (feet): Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

Geologic and hydrologic evidence:

0 , 0

State authorization:

TDS lab results:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC Well Name: GOONCH FED COM 04 Well Number: 222H Is the reclamation bond a rider under the BLM bond? Unlined pit bond number: Unlined pit bond amount: Additional bond information attachment: Section 4 - Injection Would you like to utilize Injection PWD options? N Produced Water Disposal (PWD) Location: PWD surface owner: PWD disturbance (acres): Injection PWD discharge volume (bbl/day): Injection well mineral owner: Injection well type: Injection well number: Injection well name: Assigned injection well API number? Injection well API number: Injection well new surface disturbance (acres): Minerals protection information: Mineral protection attachment: **Underground Injection Control (UIC) Permit? UIC Permit attachment:** Section 5 - Surface Discharge Would you like to utilize Surface Discharge PWD options? N Produced Water Disposal (PWD) Location: PWD surface owner: PWD disturbance (acres): Surface discharge PWD discharge volume (bbl/day): Surface Discharge NPDES Permit? **Surface Discharge NPDES Permit attachment:** Surface Discharge site facilities information: Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Well Name: GOONCH FED COM 04 We

Well Number: 222H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Info Data Report

11/21/2019

APD ID: 10400045326

Submission Date: 08/03/2019

Operator Name: NOVO OIL AND GAS NORTHERN DELAWARE LLC

Well Number: 222H

Well Type: CONVENTIONAL GAS WELL

Well Name: GOONCH FED COM 04

Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001536

BIA Bond number:

Do you have a reclamation bond? NO

is the reclamation bond a rider under the BLM bond?

is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: