

JAN 16 2020

EMNRD-OCD ARTESIA
 UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
 OMB No. 1004-0137
 Expires: January 31, 2018

5. Lease Serial No.
 NMNM036975

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.
 KANSAS 21/28 W0KN FED COM
 4H
 327005

9. API Well No.
 30-015-46621

10. Field and Pool, or Exploratory
 PURPLE SAGE WOLFCAMP GAS / PUR

11. Sec., T. R. M. of Blk. and Survey or Area
 SEC 21 / T24S / R28E / NMP

1a. Type of work: DRILL REENTER
 1b. Type of Well: Oil Well Gas Well Other
 1c. Type of Completion: Hydraulic Fracturing Single Zone Multiple Zone

2. Name of Operator
 MEWBORNE OIL COMPANY

3a. Address
 PO Box 5270 Hobbs NM 88240

3b. Phone No. (include area code)
 (575)393-5905

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
 At surface NESW / 2430 FSL / 2100 FWL / LAT 32.2026142 / LONG -104.0944154
 At proposed prod. zone SESW / 330 FSL / 2310 FWL / LAT 32.1821305 / LONG -104.0936099

12. County or Parish
 EDDY

13. State
 NM

14. Distance in miles and direction from nearest town or post office*
 10 miles

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)
 210 feet

16. No of acres in lease
 920

17. Spacing Unit dedicated to this well
 640

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.
 330 feet

19. Proposed Depth
 9506 feet / 16759 feet

20. BLM/BIA Bond No. in file
 FED: NM1693

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
 3033 feet

22. Approximate date work will start*
 06/01/2019

23. Estimated duration
 60 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be requested by the BLM.

25. Signature (Electronic Submission)
 Name (Printed/Typed) Bradley Bishop / Ph: (575)393-5905
 Date 04/22/2019

Title
 Regulatory

Approved by (Signature) (Electronic Submission)
 Name (Printed/Typed) Christopher Walls / Ph: (575)234-2234
 Date 01/15/2020

Title
 Petroleum Engineer
 Office
 CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

APPROVED WITH CONDITIONS
 Approval Date: 01/15/2020 RUP 1-22-2020

Additional Operator Remarks

Location of Well

1. SHL: NESW / 2430 FSL / 2100 FWL / TWSP: 24S / RANGE: 28E / SECTION: 21 / LAT: 32.2026142 / LONG: -104.0944154 (TVD: 0 feet, MD: 0 feet)
PPP: NESW / 2340 FSL / 2310 FWL / TWSP: 24S / RANGE: 28E / SECTION: 21 / LAT: 32.1766097 / LONG: -104.0311736 (TVD: 9308 feet, MD: 9329 feet)
BHL: SESW / 330 FSL / 2310 FWL / TWSP: 24S / RANGE: 28E / SECTION: 28 / LAT: 32.1821305 / LONG: -104.0936099 (TVD: 9506 feet, MD: 16759 feet)

BLM Point of Contact

Name: Tenille Ortiz

Title: Legal Instruments Examiner

Phone: 5752342224

Email: tortiz@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Mewbourne Oil Company
LEASE NO.:	NMNM036975
WELL NAME & NO.:	KANSAS 21/28 W0KN FED COM 4H
SURFACE HOLE FOOTAGE:	2430'/S & 2100'/W
BOTTOM HOLE FOOTAGE:	330'/S & 2310'/W
LOCATION:	Section 21, T.24 S., R.28 E., NMP
COUNTY:	Eddy County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately 425 feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch intermediate casing shall be set at approximately **2440** feet. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash. Excess cement calculates to 20%, additional cement might be required.**
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The minimum required fill of cement behind the **7** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
- **Excess cement calculates to 4%, additional cement might be required.**

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- b. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- c. Second stage above DV tool:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

- **Excess cement calculates to 21% on the 2nd stage, additional cement might be required.**
- d. The minimum required fill of cement behind the **4-1/2** inch production liner is:
- Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
 (575) 361-2822

Lea County
 Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
 393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on

which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.

- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA01032020

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

MEWBOURNE OIL COMPANY

**KANSAS 21/28 W1KN FED COM 3H
&
KANSAS 21/28 W0KN FED COM 4H**

Lease Number NMNM036975

Eddy County

KANSAS 21/28 W1KN FED COM 3H

Surface Hole Location: 2430' FSL & 2010' FWL, Section 21, T. 24 S., R. 28 E.

Bottom Hole Location: 330' FSL & 1650' FWL, Section 28, T. 24 S, R 28 E.

KANSAS 21/28 W0KN FED COM 4H

Surface Hole Location: 2430' FSL & 2100' FWL, Section 21, T. 24 S., R. 28 E.

Bottom Hole Location: 330' FSL & 2310' FWL, Section 28, T. 24 S, R 28 E.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Texas Hornshell Zone D
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for

acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Texas Hornshell Zone D

Oil and Gas and Associated Infrastructure Mitigation Measures for Zone D – CCA Boundary Requirements:

- Provide CEHMM with the permit, lease grant, or other authorization form BLM, if applicable.
- Provide CEHMM with plats or other electronic media describing the new surface disturbance for the project.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the

event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out-sloping and in-sloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

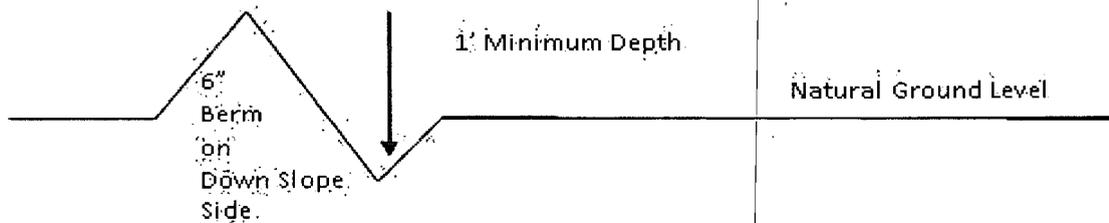

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

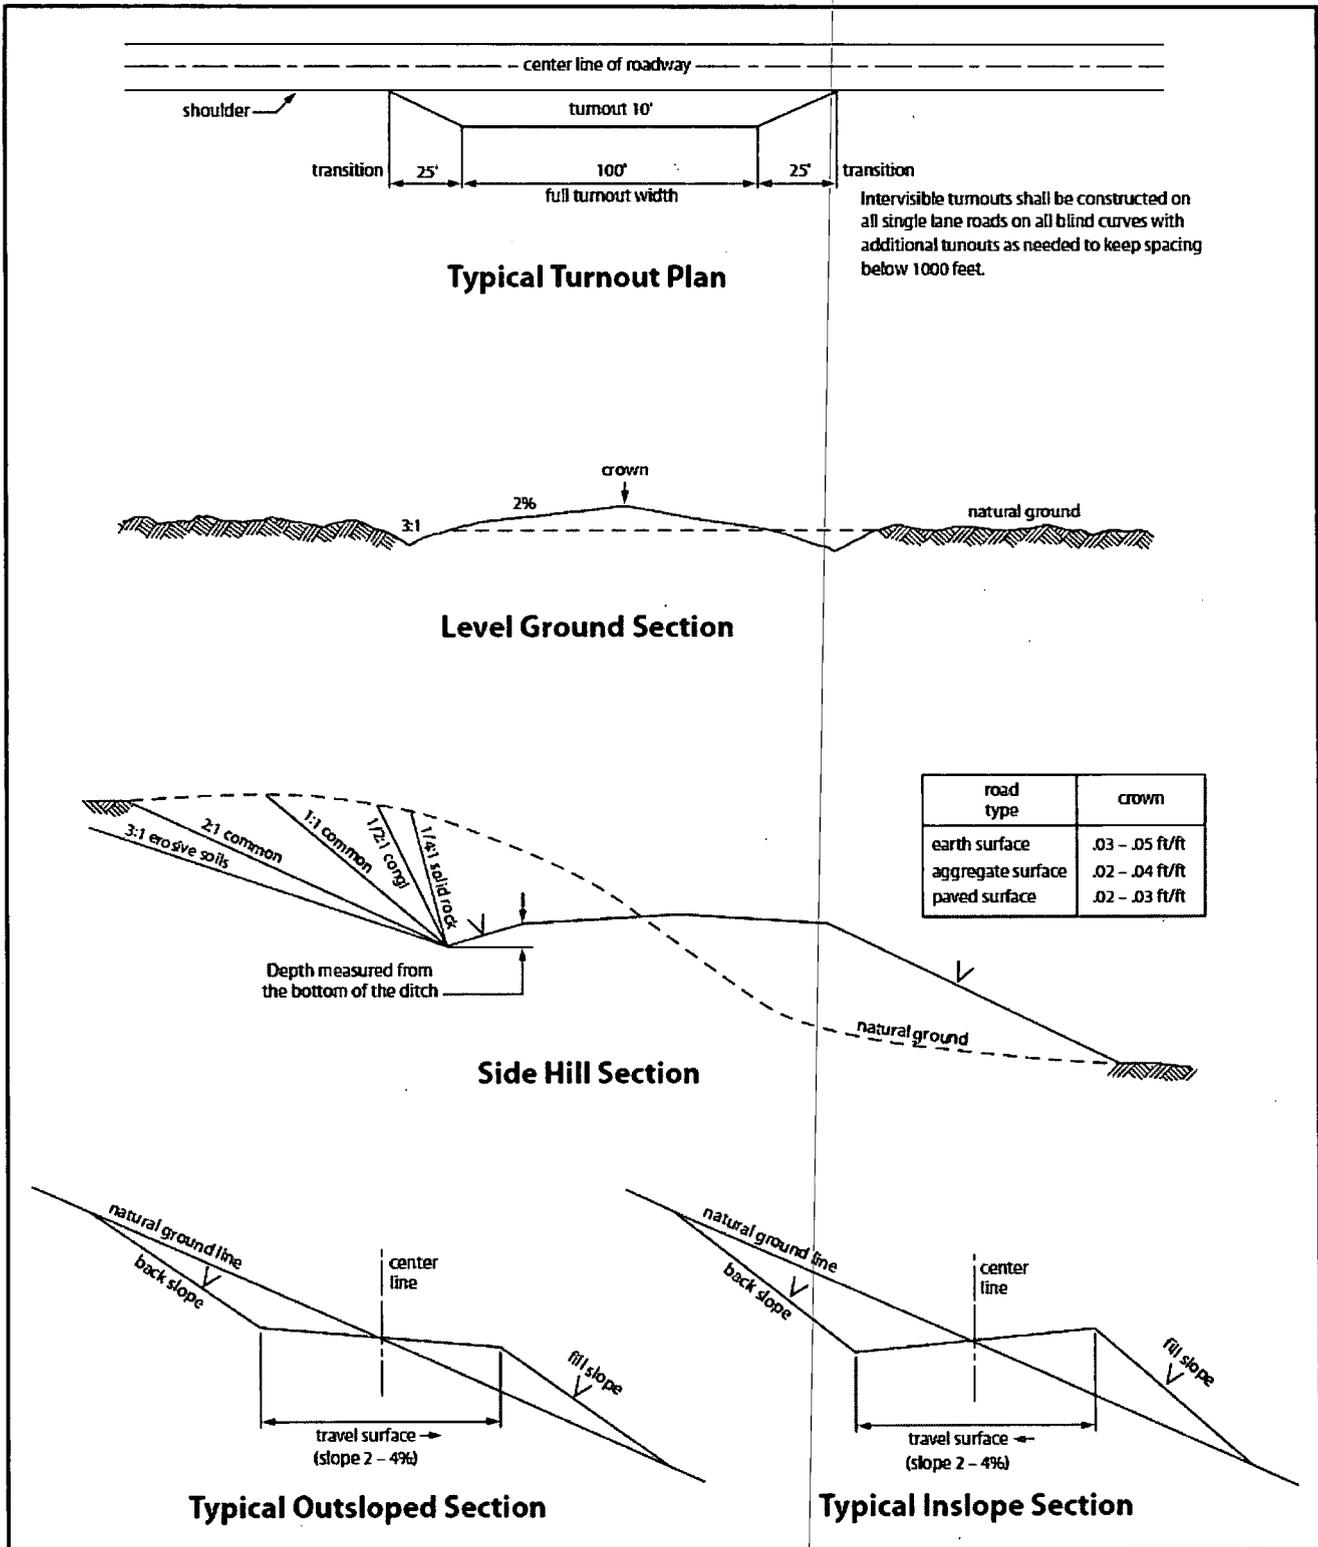


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production

equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).



Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are

NAME: Bradley Bishop

Signed on: 04/22/2019

Title: Regulatory

Street Address:

City: **State:** **Zip:**

Phone: (575)393-5905

Email address: bbishop@mewbourne.com

Field Representative

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:



APD ID: 10400040489

Submission Date: 04/22/2019

Highlighted data reflects the most recent changes
[Show Final Text](#)

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400040489

Tie to previous NOS?

Submission Date: 04/22/2019

BLM Office: CARLSBAD

User: Bradley Bishop

Title: Regulatory

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM036975

Lease Acres: 920

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: MEWBOURNE OIL COMPANY

Operator letter of designation:

Operator Info

Operator Organization Name: MEWBOURNE OIL COMPANY

Operator Address: PO Box 5270

Zip: 88240

Operator PO Box:

Operator City: Hobbs

State: NM

Operator Phone: (575)393-5905

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: PURPLE SAGE
WOLFCAMP GAS

Pool Name: PURPLE SAGE
WOLFCAMP GAS

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: KANSAS 21/28 KN FED COM WELLS

Number: 2

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: CONVENTIONAL GAS WELL

Describe Well Type:

Well sub-Type: APPRAISAL

Describe sub-type:

Distance to town: 10 Miles

Distance to nearest well: 330 FT

Distance to lease line: 210 FT

Reservoir well spacing assigned acres Measurement: 640 Acres

Well plat: Kansas21_28W0KNFedCom4H_wellplat_20190401140039.pdf

Well work start Date: 06/01/2019

Duration: 60 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 1

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	2430	FSL	2100	FWL	24S	28E	21	NESW	32.2026142	-104.0944154	EDD Y	NEW MEXI	NEW MEXI	F	NMNM 036975	3033	0	0	
KOP Leg #1	2430	FSL	2310	FWL	24S	28E	21	NESW	32.2026228	-104.093736	EDD Y	NEW MEXI	NEW MEXI	F	NMNM 036975	-5996	9032	9029	

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-1	2340	FSL	2310	FW L	24S	28E	21	NESW	32.1766097	-104.0311736	EDD Y	NEW MEXI	NEW MEXI	F	NMNM 036975	-6275	9329	9308	
EXIT Leg #1	330	FSL	2310	FW L	24S	28E	28	SESW	32.1821305	-104.0936099	EDD Y	NEW MEXI	NEW MEXI	F	NMNM 036975	-6473	16759	9506	
BHL Leg #1	330	FSL	2310	FW L	24S	28E	28	SESW	32.1821305	-104.0936099	EDD Y	NEW MEXI	NEW MEXI	F	NMNM 036975	-6473	16759	9506	



APD ID: 10400040489

Submission Date: 04/22/2019

Highlighted data reflects the most recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

[Show Final Text](#)

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
430478	UNKNOWN	3033	27	27		NONE	N
430482	TOP SALT	1963	1070	1070	SALT	NONE	N
430479	BOTTOM SALT	658	2375	2375	SALT	NONE	N
430483	LAMAR	523	2510	2510	LIMESTONE	NATURAL GAS, OIL	N
430484	BELL CANYON	428	2605	2605	SANDSTONE	NATURAL GAS, OIL	N
430485	CHERRY CANYON	-192	3225	3225	SANDSTONE	NATURAL GAS, OIL	N
430486	MANZANITA	-507	3540	3540	LIMESTONE	NATURAL GAS, OIL	N
430477	BONE SPRING LIME	-3052	6085	6085	LIMESTONE, SHALE	NATURAL GAS, OIL	N
430480	BONE SPRING 1ST	-4017	7050	7050	SANDSTONE	NATURAL GAS, OIL	N
430481	BONE SPRING 2ND	-4817	7850	7850	SANDSTONE	NATURAL GAS, OIL	N
430488	BONE SPRING 3RD	-5932	8965	8965	SANDSTONE	NATURAL GAS, OIL	N
430489	WOLFCAMP	-6307	9340	9340	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 16759

Equipment: Annular, Pipe Ram, Blind Ram

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. Anchors aren't required by manufacturer. A multi-bowl wellhead is being used. See attached schematic

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly block and floor safety valve (inside BOP) and choke lines and choke manifold.

Choke Diagram Attachment:

Kansas_21_28_W0KN_Fed_Com_4H_5M_BOPE_Choke_Diagram_20190416081339.pdf

Kansas_21_28_W0KN_Fed_Com_4H_Flex_Line_Specs_20190422104346.pdf

Kansas_21_28_W0KN_Fed_Com_4H_Flex_Line_Specs_API_16C_20191213145033.pdf

BOP Diagram Attachment:

Kansas_21_28_W0KN_Fed_Com_4H_5M_BOPE_Schematic_20190416081350.pdf

Kansas_21_28_W0KN_Fed_Com_4H_Multi_Bowl_WH_20190416081351.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	425	0	425			425	H-40	48	ST&C	3.96	8.9	DRY	15.78	DRY	26.52
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	2440	0	2440			2440	J-55	36	LT&C	1.59	2.77	DRY	5.16	DRY	6.42
3	PRODUCTION	8.75	7.0	NEW	API	N	0	9700	0	9506			9700	P-110	26	LT&C	1.33	2.12	DRY	2.75	DRY	3.25
4	LINER	6.125	4.5	NEW	API	N	9032	16759	9029	9506			7727	P-110	13.5	LT&C	1.8	2.09	DRY	3.24	DRY	4.05

Casing Attachments

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Kansas_21_28_W0KN_Fed_Com_4H_Csg_Assumptions_20190416081508.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Kansas_21_28_W0KN_Fed_Com_4H_Csg_Assumptions_20190416081703.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Kansas_21_28_W0KN_Fed_Com_4H_Csg_Assumptions_20190416082022.pdf

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Casing Attachments

Casing ID: 4 String Type: LINER

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Kansas_21_28_W0KN_Fed_Com_4H_Csg_Assumptions_20190416082150.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	237	160	2.12	12.5	339	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail		237	425	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead		0	1749	320	2.12	12.5	678	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		1749	2440	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead	3540	2240	2814	50	2.12	12.5	106	25	Class C	Gel, Retarder, Defoamer, Extender
PRODUCTION	Tail		2814	3540	100	1.34	14.8	134	25	Class C	Retarder
PRODUCTION	Lead	3540	3540	7218	330	2.12	12.5	700	25	Class C	Gel, Retarder, Defoamer, Extender
PRODUCTION	Tail		7218	9700	400	1.18	15.6	472	25	Class H	Retarder, Fluid Loss, Defoamer
LINER	Lead		9032	16759	310	2.97	11.2	921	25	Class C	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-Settling Agent

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Section 5 - Circulating Medium

Lud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Lost circulation material Sweeps Mud scavengers in surface hole

Describe the mud monitoring system utilized: Pason/PVT/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	425	SPUD MUD	8.6	8.8							
425	2440	SALT SATURATED	10	10							
2440	9506	WATER-BASED MUD	8.6	9.5							
9506	9506	OIL-BASED MUD	10	12							MW up to 13.0 ppg may be required for shale control. The highest MW needed to balance formation pressure is expected to be 12.0 ppg.

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GR/CNL from KOP (9032') to surface

List of open and cased hole logs run in the well:

CNL, DS, GR, MWD, MUDLOG

Coring operation description for the well:

None

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5932

Anticipated Surface Pressure: 3840.68

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Kansas_21_28_W0KN_Fed_Com_4H_H2S_Plan_20190416082724.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Kansas_21_28_W0KN_Fed_Com_4H_Dir_Plan_20190416082756.pdf

Kansas_21_28_W0KN_Fed_Com_4H_Dir_Plot_20190416082757.pdf


Other proposed operations facets description:

Other proposed operations facets attachment:


Kansas_21_28_W0KN_Fed_Com_4H_C101_20190416082815.pdf

Kansas_21_28_W0KN_Fed_Com_4H_Drlg_Program_20190416082816.pdf

Other Variance attachment:



5M BOPE & Closed Loop Equipment Schematic

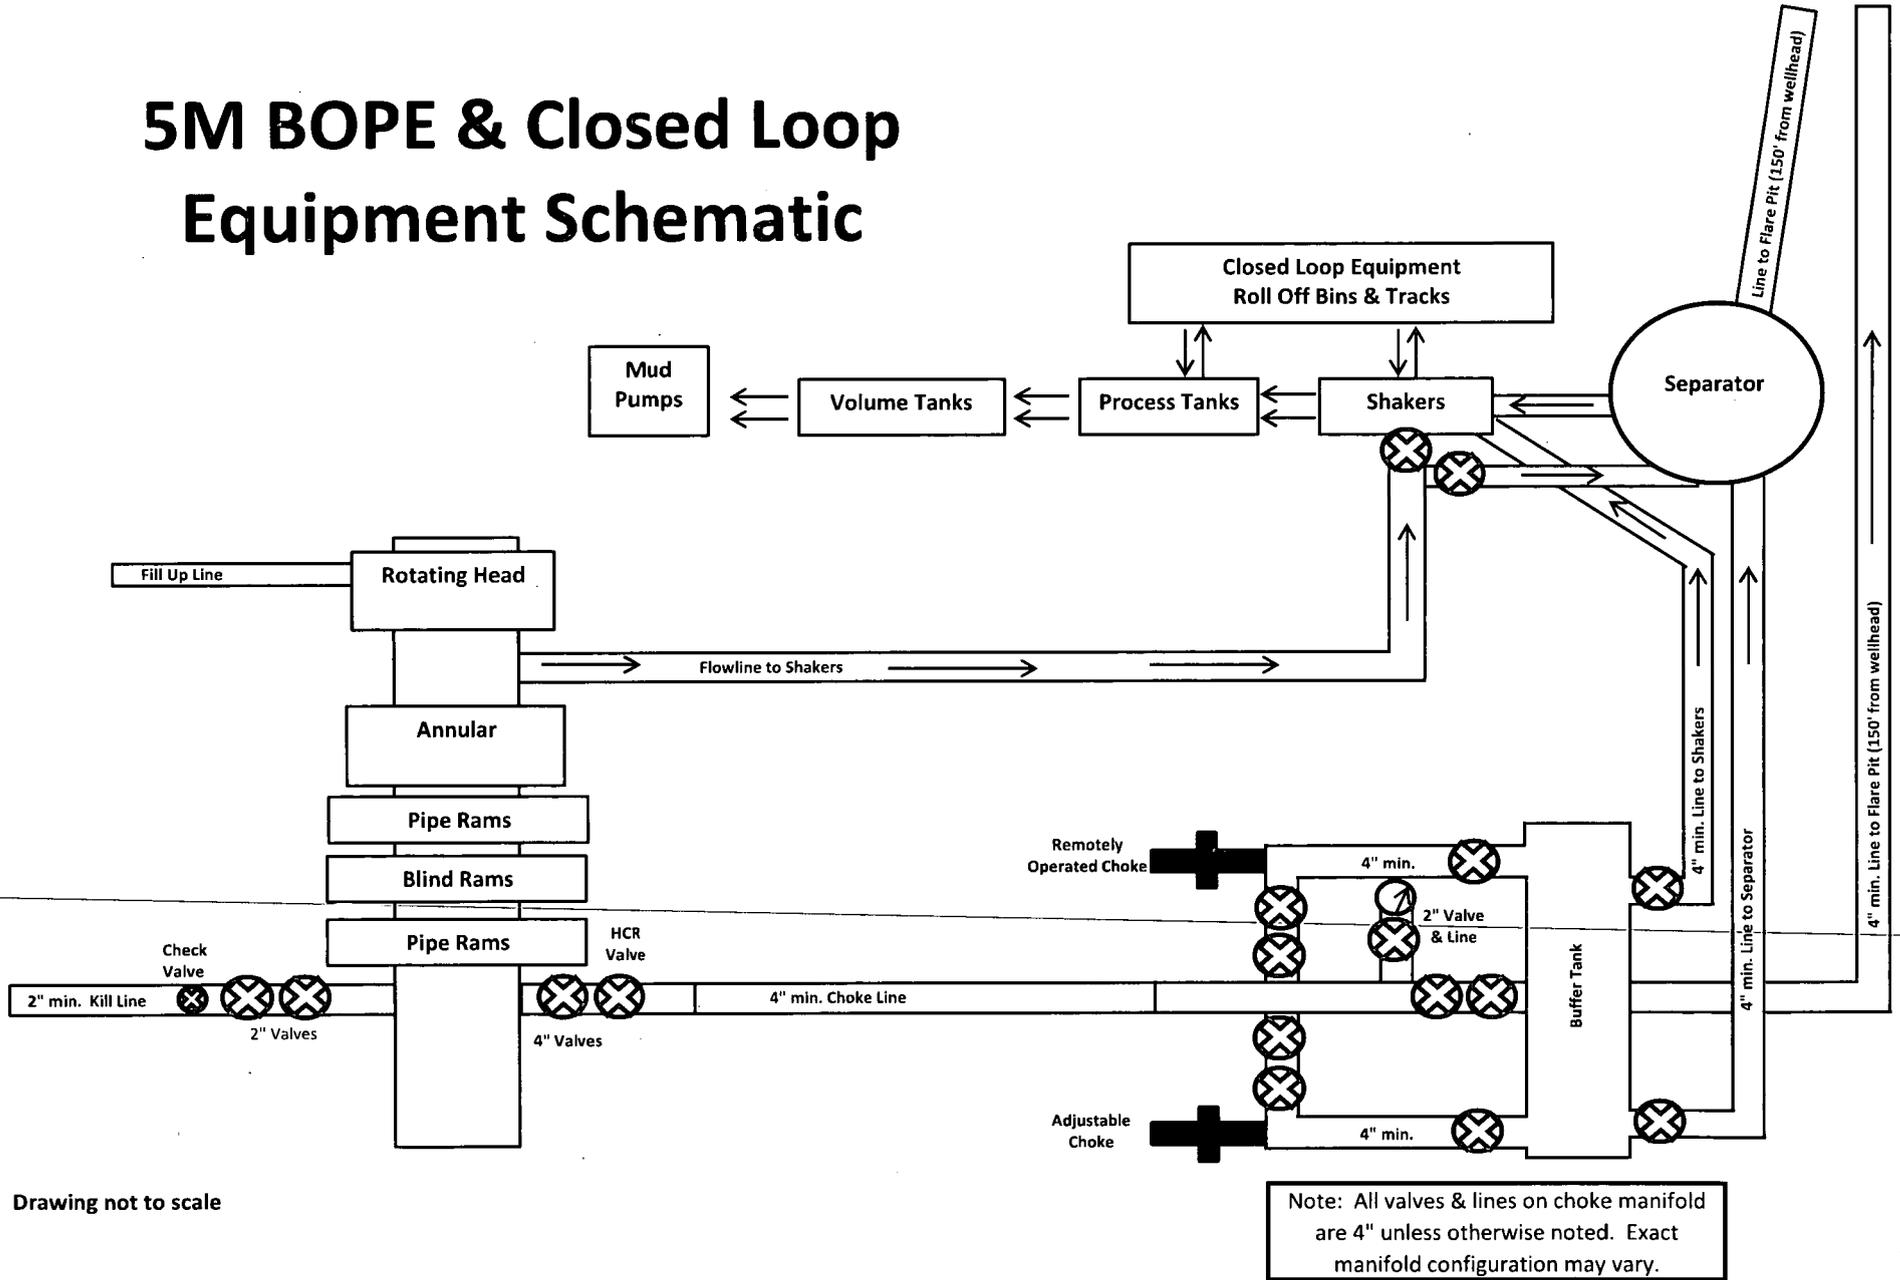

Drawing not to scale



GATES E & S NORTH AMERICA, INC.
 134 44TH STREET
 CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: Tim.Cantu@gates.com
WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE

End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality Manager :
 Date :
 Signature :

QUALITY
4/30/2015
<i>Justin Cropper</i>

Production:
 Date :
 Signature :

PRODUCTION
4/30/2015
<i>Justin Cropper</i>

Form PTC - 01 Rev.02





GATES ENGINEERING & SERVICES NORTH AMERICA
 7603 Prairie Oak Dr.
 Houston, TX 77086

PHONE: (281) 602 - 4119
 FAX:
 EMAIL: Troy.Schmidt@gates.com
 WEB: www.gates.com

10K CHOKE & KILL ASSEMBLY PRESSURE TEST CERTIFICATE

Customer: **A-9 AUSTIN INC DBA AUSTIN HDSE**
 Customer Ref.: **4101901**
 Invoice No.: **911950**

Test Date: **8/20/2018**
 Hose Serial No.: **11-087018-10**
 Created By: **Hose Rack**

Product Description: **10K/3.035.00K4 1/16 10K FL/3000xFT L/E**

End Fitting 1: **4 1/16 in. Flanged Flange**
 Gates Part No.: **68503010-9721632**
 Working Pressure: **10,000 psi**

End Fitting 2: **4 1/16 in. Flanged Flange**
 Assembly Code: **L40695052218H-082018-10**
 Test Pressure: **15,000 psi**

Gates Engineering & Services North America certifies that the following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements.



Quality: **QUALITY**
 Date: **8/20/2018**
 Signature: *Mason Napier*

Production: **PRODUCTION**
 Date: **8/20/2018**
 Signature: *[Signature]*






Form PTC - 01 Rev.02



Hydril "GK"
13 5/8" 5M

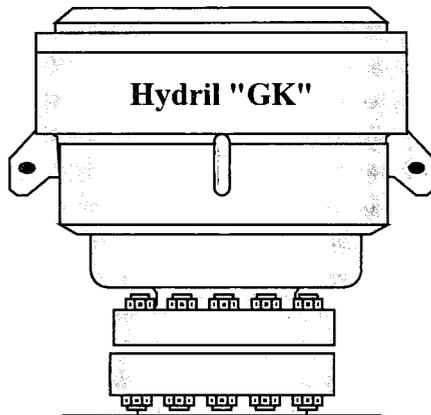

Cameron Type U
13 5/8" 5M

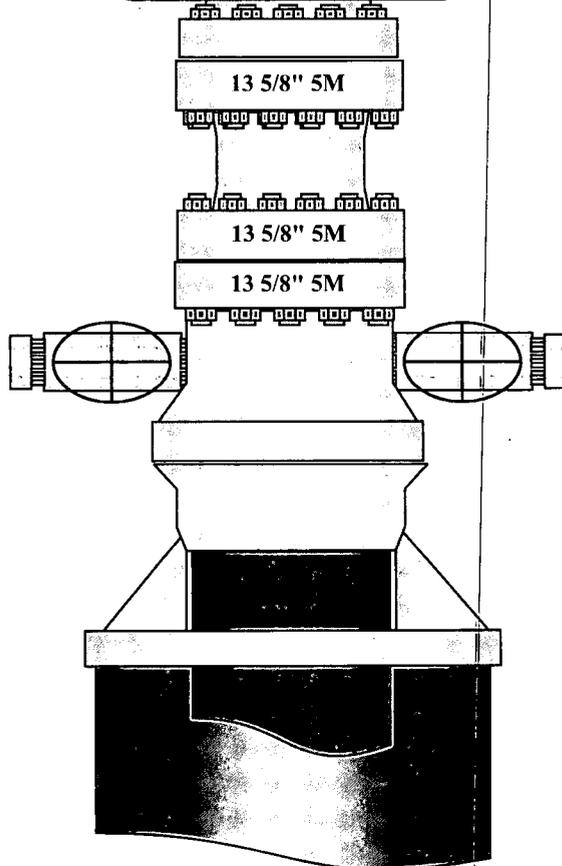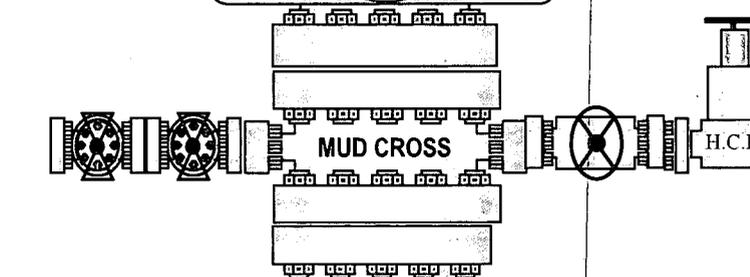




CAMERON

A Schlumberger Company

13-5/8" MN-DS Wellhead System

Ground Level

Ground Level

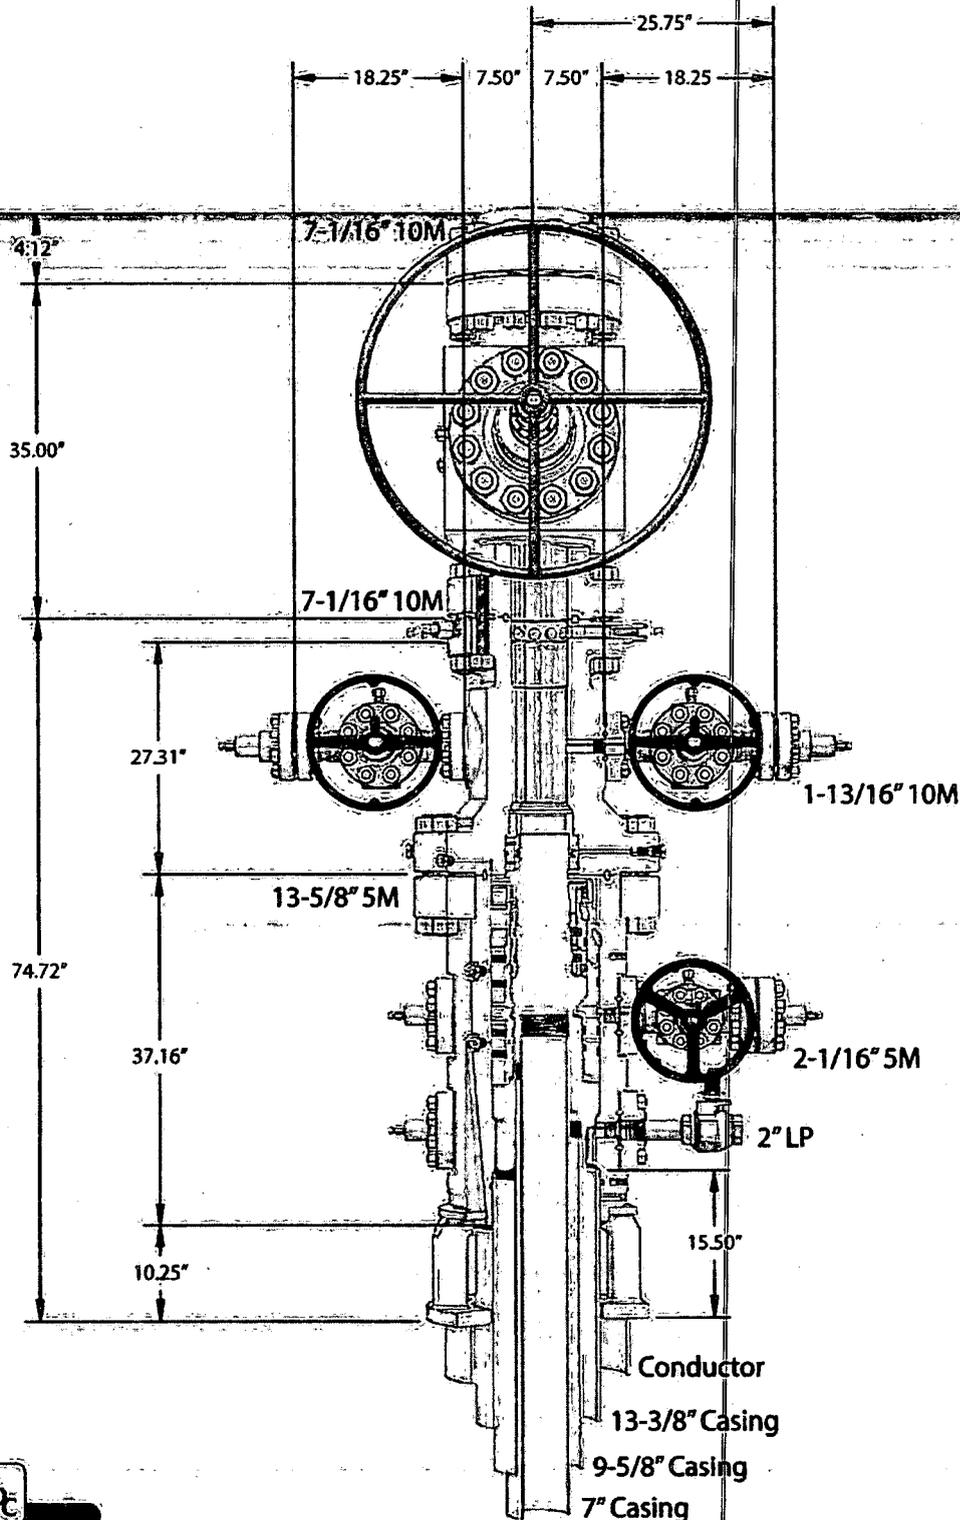

*Engineering Name 57" conductor cut-off
79*

C7585
Rev. 02
NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	425'	13.375"	48	H40	STC	3.96	8.90	15.78	26.52
12.25"	0'	2440'	9.625"	36	J55	LTC	1.59	2.77	5.16	6.42
8.75"	0'	9700'	7"	26	P110	LTC	1.33	2.12	2.75	3.29
6.125"	9032'	16759'	4.5"	13.5	P110	LTC	1.80	2.09	3.24	4.05
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H
Sec 21 & 28, T24S, R28E
SL: 2430' FSL & 2100' FWL, Sec. 21
BHL: 330' FSL & 2310' FWL, Sec. 28

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	425'	13.375"	48	H40	STC	3.96	8.90	15.78	26.52
12.25"	0'	2440'	9.625"	36	J55	LTC	1.59	2.77	5.16	6.42
8.75"	0'	9700'	7"	26	P110	LTC	1.33	2.12	2.75	3.29
6.125"	9032'	16759'	4.5"	13.5	P110	LTC	1.80	2.09	3.24	4.05
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h
 Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	425'	13.375"	48	H40	STC	3.96	8.90	15.78	26.52
12.25"	0'	2440'	9.625"	36	J55	LTC	1.59	2.77	5.16	6.42
8.75"	0'	9700'	7"	26	P110	LTC	1.33	2.12	2.75	3.29
6.125"	9032'	16759'	4.5"	13.5	P110	LTC	1.80	2.09	3.24	4.05
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h
Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	425'	13.375"	48	H40	STC	3.96	8.90	15.78	26.52
12.25"	0'	2440'	9.625"	36	J55	LTC	1.59	2.77	5.16	6.42
8.75"	0'	9700'	7"	26	P110	LTC	1.33	2.12	2.75	3.29
6.125"	9032'	16759'	4.5"	13.5	P110	LTC	1.80	2.09	3.24	4.05
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h
Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Hydrogen Sulfide Drilling Operations Plan
Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H₂S were found. MOC will have on location and working all H₂S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

1. The hazards and characteristics of hydrogen sulfide gas.
2. The proper use of personal protective equipment and life support systems.
3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- 1 The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- 3 The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a known hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment
 - A. Choke manifold with minimum of one adjustable choke/remote choke.
 - B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
 - C. Auxiliary equipment including annular type blowout preventer.
2. Protective Equipment for Essential Personnel

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H₂S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H₂S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. Hydrogen Sulfide Protection and Monitoring Equipment
Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.
4. Visual Warning Systems
 - A. Wind direction indicators as indicated on the wellsite diagram.
 - B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. Mud Program

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. Metallurgy

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. Communications

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. Well Testing

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. Emergency Phone Numbers

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical Center of Carlsbad	575-492-5000

Mewbourne Oil Company	Hobbs District Office	575-393-5905
	Fax	575-397-6252
	2nd Fax	575-393-7259

District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Mewbourne Oil Company

Eddy County, New Mexico NAD 83

Kansas 21/28 W0KN Fed Com #4H

SL: 2430 FSL & 2100 FWL (Sec 21)

Sec 21, T24S, R28E

BHL: 330 FSL & 2310 FWL (Sec 28)

Plan: Design #1

Standard Planning Report

04 April, 2019

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Kansas 21/28 W0KN Fed Com #4H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3060.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3060.0usft (Original Well Elev)
Site:	Kansas 21/28 W0KN Fed Com #4H	North Reference:	Grid
Well:	SL: 2430 FSL & 2100 FWL (Sec 21)	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330 FSL & 2310 FWL (Sec 28)		
Design:	Design #1		

Project	Eddy County, New Mexico NAD 83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Kansas 21/28 W0KN Fed Com #4H				
Site Position:	Northing:	437,527.40 usft	Latitude:	32.2026142	
From: Map	Easting:	615,236.00 usft	Longitude:	-104.0944153	
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.13 °

Well	SL: 2430 FSL & 2100 FWL (Sec 21)					
Well Position	+N/-S	0.0 usft	Northing:	437,527.40 usft	Latitude:	32.2026142
	+E/-W	0.0 usft	Easting:	615,236.00 usft	Longitude:	-104.0944153
Position Uncertainty	0.0 usft		Wellhead Elevation:	3,060.0 usft	Ground Level:	3,033.0 usft

Wellbore	BHL: 330 FSL & 2310 FWL (Sec 28)				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010	4/4/2019	6.86	59.89	47,774

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.0	0.0	0.0	177.96

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
425.0	0.00	0.00	425.0	0.0	0.0	0.00	0.00	0.00	0.00	
519.3	1.41	89.02	519.3	0.0	1.2	1.50	1.50	0.00	89.02	
8,937.3	1.41	89.02	8,934.7	3.6	208.9	0.00	0.00	0.00	0.00	
9,031.6	0.00	0.00	9,029.0	3.6	210.1	1.50	-1.50	0.00	180.00	KOP: 2430 FSL & 231
9,780.9	90.00	179.57	9,506.0	-473.4	213.7	12.01	12.01	0.00	179.57	
16,758.7	90.00	179.57	9,506.0	-7,451.0	265.7	0.00	0.00	0.00	0.00	BHL: 330 FSL & 2310

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Kansas 21/28 W0KN Fed Com #4H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3060.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3060.0usft (Original Well Elev)
Site:	Kansas 21/28 W0KN Fed Com #4H	North Reference:	Grid
Well:	SL: 2430 FSL & 2100 FWL (Sec 21)	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330 FSL & 2310 FWL (Sec 28)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
SL: 2430 FSL & 2100 FWL (Sec 21)										
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
425.0	0.00	0.00	425.0	0.0	0.0	0.0	0.00	0.00	0.00	0.00
500.0	1.13	89.02	500.0	0.0	0.7	0.0	1.50	1.50	0.00	0.00
519.3	1.41	89.02	519.3	0.0	1.2	0.0	1.50	1.50	0.00	0.00
600.0	1.41	89.02	600.0	0.1	3.2	0.1	0.00	0.00	0.00	0.00
700.0	1.41	89.02	699.9	0.1	5.6	0.1	0.00	0.00	0.00	0.00
800.0	1.41	89.02	799.9	0.1	8.1	0.1	0.00	0.00	0.00	0.00
900.0	1.41	89.02	899.9	0.2	10.6	0.2	0.00	0.00	0.00	0.00
1,000.0	1.41	89.02	999.8	0.2	13.0	0.2	0.00	0.00	0.00	0.00
1,100.0	1.41	89.02	1,099.8	0.3	15.5	0.3	0.00	0.00	0.00	0.00
1,200.0	1.41	89.02	1,199.8	0.3	18.0	0.3	0.00	0.00	0.00	0.00
1,300.0	1.41	89.02	1,299.8	0.4	20.4	0.4	0.00	0.00	0.00	0.00
1,400.0	1.41	89.02	1,399.7	0.4	22.9	0.4	0.00	0.00	0.00	0.00
1,500.0	1.41	89.02	1,499.7	0.4	25.4	0.5	0.00	0.00	0.00	0.00
1,600.0	1.41	89.02	1,599.7	0.5	27.8	0.5	0.00	0.00	0.00	0.00
1,700.0	1.41	89.02	1,699.6	0.5	30.3	0.6	0.00	0.00	0.00	0.00
1,800.0	1.41	89.02	1,799.6	0.6	32.8	0.6	0.00	0.00	0.00	0.00
1,900.0	1.41	89.02	1,899.6	0.6	35.2	0.7	0.00	0.00	0.00	0.00
2,000.0	1.41	89.02	1,999.5	0.6	37.7	0.7	0.00	0.00	0.00	0.00
2,100.0	1.41	89.02	2,099.5	0.7	40.2	0.7	0.00	0.00	0.00	0.00
2,200.0	1.41	89.02	2,199.5	0.7	42.6	0.8	0.00	0.00	0.00	0.00
2,300.0	1.41	89.02	2,299.4	0.8	45.1	0.8	0.00	0.00	0.00	0.00
2,400.0	1.41	89.02	2,399.4	0.8	47.6	0.9	0.00	0.00	0.00	0.00
2,500.0	1.41	89.02	2,499.4	0.9	50.1	0.9	0.00	0.00	0.00	0.00
2,600.0	1.41	89.02	2,599.4	0.9	52.5	1.0	0.00	0.00	0.00	0.00
2,700.0	1.41	89.02	2,699.3	0.9	55.0	1.0	0.00	0.00	0.00	0.00
2,800.0	1.41	89.02	2,799.3	1.0	57.5	1.1	0.00	0.00	0.00	0.00
2,900.0	1.41	89.02	2,899.3	1.0	59.9	1.1	0.00	0.00	0.00	0.00
3,000.0	1.41	89.02	2,999.2	1.1	62.4	1.2	0.00	0.00	0.00	0.00
3,100.0	1.41	89.02	3,099.2	1.1	64.9	1.2	0.00	0.00	0.00	0.00
3,200.0	1.41	89.02	3,199.2	1.2	67.3	1.2	0.00	0.00	0.00	0.00
3,300.0	1.41	89.02	3,299.1	1.2	69.8	1.3	0.00	0.00	0.00	0.00
3,400.0	1.41	89.02	3,399.1	1.2	72.3	1.3	0.00	0.00	0.00	0.00
3,500.0	1.41	89.02	3,499.1	1.3	74.7	1.4	0.00	0.00	0.00	0.00
3,600.0	1.41	89.02	3,599.1	1.3	77.2	1.4	0.00	0.00	0.00	0.00
3,700.0	1.41	89.02	3,699.0	1.4	79.7	1.5	0.00	0.00	0.00	0.00
3,800.0	1.41	89.02	3,799.0	1.4	82.1	1.5	0.00	0.00	0.00	0.00
3,900.0	1.41	89.02	3,899.0	1.4	84.6	1.6	0.00	0.00	0.00	0.00
4,000.0	1.41	89.02	3,998.9	1.5	87.1	1.6	0.00	0.00	0.00	0.00
4,100.0	1.41	89.02	4,098.9	1.5	89.5	1.7	0.00	0.00	0.00	0.00
4,200.0	1.41	89.02	4,198.9	1.6	92.0	1.7	0.00	0.00	0.00	0.00
4,300.0	1.41	89.02	4,298.8	1.6	94.5	1.7	0.00	0.00	0.00	0.00
4,400.0	1.41	89.02	4,398.8	1.7	96.9	1.8	0.00	0.00	0.00	0.00
4,500.0	1.41	89.02	4,498.8	1.7	99.4	1.8	0.00	0.00	0.00	0.00
4,600.0	1.41	89.02	4,598.7	1.7	101.9	1.9	0.00	0.00	0.00	0.00
4,700.0	1.41	89.02	4,698.7	1.8	104.4	1.9	0.00	0.00	0.00	0.00
4,800.0	1.41	89.02	4,798.7	1.8	106.8	2.0	0.00	0.00	0.00	0.00
4,900.0	1.41	89.02	4,898.7	1.9	109.3	2.0	0.00	0.00	0.00	0.00
5,000.0	1.41	89.02	4,998.6	1.9	111.8	2.1	0.00	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Kansas 21/28 W0KN Fed Com #4H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3060.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3060.0usft (Original Well Elev)
Site:	Kansas 21/28 W0KN Fed Com #4H	North Reference:	Grid
Well:	SL: 2430 FSL & 2100 FWL (Sec 21)	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330 FSL & 2310 FWL (Sec 28)		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,100.0	1.41	89.02	5,098.6	2.0	114.2	2.1	0.00	0.00	0.00	
5,200.0	1.41	89.02	5,198.6	2.0	116.7	2.2	0.00	0.00	0.00	
5,300.0	1.41	89.02	5,298.5	2.0	119.2	2.2	0.00	0.00	0.00	
5,400.0	1.41	89.02	5,398.5	2.1	121.6	2.3	0.00	0.00	0.00	
5,500.0	1.41	89.02	5,498.5	2.1	124.1	2.3	0.00	0.00	0.00	
5,600.0	1.41	89.02	5,598.4	2.2	126.6	2.3	0.00	0.00	0.00	
5,700.0	1.41	89.02	5,698.4	2.2	129.0	2.4	0.00	0.00	0.00	
5,800.0	1.41	89.02	5,798.4	2.3	131.5	2.4	0.00	0.00	0.00	
5,900.0	1.41	89.02	5,898.4	2.3	134.0	2.5	0.00	0.00	0.00	
6,000.0	1.41	89.02	5,998.3	2.3	136.4	2.5	0.00	0.00	0.00	
6,100.0	1.41	89.02	6,098.3	2.4	138.9	2.6	0.00	0.00	0.00	
6,200.0	1.41	89.02	6,198.3	2.4	141.4	2.6	0.00	0.00	0.00	
6,300.0	1.41	89.02	6,298.2	2.5	143.8	2.7	0.00	0.00	0.00	
6,400.0	1.41	89.02	6,398.2	2.5	146.3	2.7	0.00	0.00	0.00	
6,500.0	1.41	89.02	6,498.2	2.5	148.8	2.8	0.00	0.00	0.00	
6,600.0	1.41	89.02	6,598.1	2.6	151.2	2.8	0.00	0.00	0.00	
6,700.0	1.41	89.02	6,698.1	2.6	153.7	2.8	0.00	0.00	0.00	
6,800.0	1.41	89.02	6,798.1	2.7	156.2	2.9	0.00	0.00	0.00	
6,900.0	1.41	89.02	6,898.0	2.7	158.7	2.9	0.00	0.00	0.00	
7,000.0	1.41	89.02	6,998.0	2.8	161.1	3.0	0.00	0.00	0.00	
7,100.0	1.41	89.02	7,098.0	2.8	163.6	3.0	0.00	0.00	0.00	
7,200.0	1.41	89.02	7,198.0	2.8	166.1	3.1	0.00	0.00	0.00	
7,300.0	1.41	89.02	7,297.9	2.9	168.5	3.1	0.00	0.00	0.00	
7,400.0	1.41	89.02	7,397.9	2.9	171.0	3.2	0.00	0.00	0.00	
7,500.0	1.41	89.02	7,497.9	3.0	173.5	3.2	0.00	0.00	0.00	
7,600.0	1.41	89.02	7,597.8	3.0	175.9	3.3	0.00	0.00	0.00	
7,700.0	1.41	89.02	7,697.8	3.1	178.4	3.3	0.00	0.00	0.00	
7,800.0	1.41	89.02	7,797.8	3.1	180.9	3.3	0.00	0.00	0.00	
7,900.0	1.41	89.02	7,897.7	3.1	183.3	3.4	0.00	0.00	0.00	
8,000.0	1.41	89.02	7,997.7	3.2	185.8	3.4	0.00	0.00	0.00	
8,100.0	1.41	89.02	8,097.7	3.2	188.3	3.5	0.00	0.00	0.00	
8,200.0	1.41	89.02	8,197.6	3.3	190.7	3.5	0.00	0.00	0.00	
8,300.0	1.41	89.02	8,297.6	3.3	193.2	3.6	0.00	0.00	0.00	
8,400.0	1.41	89.02	8,397.6	3.4	195.7	3.6	0.00	0.00	0.00	
8,500.0	1.41	89.02	8,497.6	3.4	198.1	3.7	0.00	0.00	0.00	
8,600.0	1.41	89.02	8,597.5	3.4	200.6	3.7	0.00	0.00	0.00	
8,700.0	1.41	89.02	8,697.5	3.5	203.1	3.8	0.00	0.00	0.00	
8,800.0	1.41	89.02	8,797.5	3.5	205.5	3.8	0.00	0.00	0.00	
8,900.0	1.41	89.02	8,897.4	3.6	208.0	3.9	0.00	0.00	0.00	
8,937.3	1.41	89.02	8,934.7	3.6	208.9	3.9	0.00	0.00	0.00	
9,000.0	0.47	89.02	8,997.4	3.6	210.0	3.9	1.50	-1.50	0.00	
9,031.6	0.00	0.00	9,029.0	3.6	210.1	3.9	1.50	-1.50	0.00	
KOP: 2430 FSL & 2310 FWL (21)										
9,100.0	8.22	179.57	9,097.2	-1.3	210.1	8.8	12.01	12.01	0.00	
9,200.0	20.23	179.57	9,193.9	-25.8	210.3	33.3	12.01	12.01	0.00	
9,300.0	32.24	179.57	9,283.5	-69.9	210.6	77.4	12.01	12.01	0.00	
9,329.4	35.77	179.57	9,307.8	-86.4	210.8	93.8	12.01	12.01	0.00	
FTP: 2340 FSL & 2310 FWL (Sec 21)										
9,400.0	44.25	179.57	9,361.9	-131.7	211.1	139.2	12.01	12.01	0.00	
9,500.0	56.26	179.57	9,425.7	-208.5	211.7	215.9	12.01	12.01	0.00	
9,600.0	68.28	179.57	9,472.1	-296.8	212.3	304.2	12.01	12.01	0.00	
9,700.0	80.29	179.57	9,499.2	-392.9	213.1	400.3	12.01	12.01	0.00	
9,780.9	90.00	179.57	9,506.0	-473.4	213.7	480.7	12.01	12.01	0.00	
9,800.0	90.00	179.57	9,506.0	-492.5	213.8	499.8	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Kansas 21/28 W0KN Fed Com #4H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3060.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3060.0usft (Original Well Elev)
Site:	Kansas 21/28 W0KN Fed Com #4H	North Reference:	Grid
Well:	SL: 2430 FSL & 2100 FWL (Sec 21)	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330 FSL & 2310 FWL (Sec 28)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,900.0	90.00	179.57	9,506.0	-592.5	214.5	599.8	0.00	0.00	0.00	
10,000.0	90.00	179.57	9,506.0	-692.5	215.3	699.8	0.00	0.00	0.00	
10,100.0	90.00	179.57	9,506.0	-792.5	216.0	799.7	0.00	0.00	0.00	
10,200.0	90.00	179.57	9,506.0	-892.5	216.8	899.7	0.00	0.00	0.00	
10,300.0	90.00	179.57	9,506.0	-992.5	217.5	999.6	0.00	0.00	0.00	
10,400.0	90.00	179.57	9,506.0	-1,092.5	218.3	1,099.6	0.00	0.00	0.00	
10,500.0	90.00	179.57	9,506.0	-1,192.5	219.0	1,199.6	0.00	0.00	0.00	
10,600.0	90.00	179.57	9,506.0	-1,292.5	219.8	1,299.5	0.00	0.00	0.00	
10,700.0	90.00	179.57	9,506.0	-1,392.5	220.5	1,399.5	0.00	0.00	0.00	
10,800.0	90.00	179.57	9,506.0	-1,492.5	221.3	1,499.4	0.00	0.00	0.00	
10,900.0	90.00	179.57	9,506.0	-1,592.5	222.0	1,599.4	0.00	0.00	0.00	
11,000.0	90.00	179.57	9,506.0	-1,692.5	222.8	1,699.4	0.00	0.00	0.00	
11,100.0	90.00	179.57	9,506.0	-1,792.5	223.5	1,799.3	0.00	0.00	0.00	
11,200.0	90.00	179.57	9,506.0	-1,892.5	224.2	1,899.3	0.00	0.00	0.00	
11,300.0	90.00	179.57	9,506.0	-1,992.5	225.0	1,999.2	0.00	0.00	0.00	
11,400.0	90.00	179.57	9,506.0	-2,092.5	225.7	2,099.2	0.00	0.00	0.00	
11,500.0	90.00	179.57	9,506.0	-2,192.5	226.5	2,199.2	0.00	0.00	0.00	
11,600.0	90.00	179.57	9,506.0	-2,292.5	227.2	2,299.1	0.00	0.00	0.00	
11,700.0	90.00	179.57	9,506.0	-2,392.5	228.0	2,399.1	0.00	0.00	0.00	
11,800.0	90.00	179.57	9,506.0	-2,492.5	228.7	2,499.0	0.00	0.00	0.00	
11,900.0	90.00	179.57	9,506.0	-2,592.5	229.5	2,599.0	0.00	0.00	0.00	
12,000.0	90.00	179.57	9,506.0	-2,692.5	230.2	2,699.0	0.00	0.00	0.00	
12,100.0	90.00	179.57	9,506.0	-2,792.5	231.0	2,798.9	0.00	0.00	0.00	
12,200.0	90.00	179.57	9,506.0	-2,892.5	231.7	2,898.9	0.00	0.00	0.00	
12,300.0	90.00	179.57	9,506.0	-2,992.5	232.4	2,998.8	0.00	0.00	0.00	
12,400.0	90.00	179.57	9,506.0	-3,092.5	233.2	3,098.8	0.00	0.00	0.00	
12,500.0	90.00	179.57	9,506.0	-3,192.5	233.9	3,198.8	0.00	0.00	0.00	
12,600.0	90.00	179.57	9,506.0	-3,292.5	234.7	3,298.7	0.00	0.00	0.00	
12,700.0	90.00	179.57	9,506.0	-3,392.5	235.4	3,398.7	0.00	0.00	0.00	
12,800.0	90.00	179.57	9,506.0	-3,492.4	236.2	3,498.6	0.00	0.00	0.00	
12,900.0	90.00	179.57	9,506.0	-3,592.4	236.9	3,598.6	0.00	0.00	0.00	
13,000.0	90.00	179.57	9,506.0	-3,692.4	237.7	3,698.6	0.00	0.00	0.00	
13,100.0	90.00	179.57	9,506.0	-3,792.4	238.4	3,798.5	0.00	0.00	0.00	
13,200.0	90.00	179.57	9,506.0	-3,892.4	239.2	3,898.5	0.00	0.00	0.00	
13,300.0	90.00	179.57	9,506.0	-3,992.4	239.9	3,998.4	0.00	0.00	0.00	
13,400.0	90.00	179.57	9,506.0	-4,092.4	240.7	4,098.4	0.00	0.00	0.00	
13,500.0	90.00	179.57	9,506.0	-4,192.4	241.4	4,198.4	0.00	0.00	0.00	
13,600.0	90.00	179.57	9,506.0	-4,292.4	242.1	4,298.3	0.00	0.00	0.00	
13,700.0	90.00	179.57	9,506.0	-4,392.4	242.9	4,398.3	0.00	0.00	0.00	
13,800.0	90.00	179.57	9,506.0	-4,492.4	243.6	4,498.2	0.00	0.00	0.00	
13,900.0	90.00	179.57	9,506.0	-4,592.4	244.4	4,598.2	0.00	0.00	0.00	
14,000.0	90.00	179.57	9,506.0	-4,692.4	245.1	4,698.2	0.00	0.00	0.00	
14,100.0	90.00	179.57	9,506.0	-4,792.4	245.9	4,798.1	0.00	0.00	0.00	
14,200.0	90.00	179.57	9,506.0	-4,892.4	246.6	4,898.1	0.00	0.00	0.00	
14,300.0	90.00	179.57	9,506.0	-4,992.4	247.4	4,998.1	0.00	0.00	0.00	
14,400.0	90.00	179.57	9,506.0	-5,092.4	248.1	5,098.0	0.00	0.00	0.00	
14,500.0	90.00	179.57	9,506.0	-5,192.4	248.9	5,198.0	0.00	0.00	0.00	
14,600.0	90.00	179.57	9,506.0	-5,292.4	249.6	5,297.9	0.00	0.00	0.00	
14,700.0	90.00	179.57	9,506.0	-5,392.4	250.3	5,397.9	0.00	0.00	0.00	
14,800.0	90.00	179.57	9,506.0	-5,492.4	251.1	5,497.9	0.00	0.00	0.00	
14,900.0	90.00	179.57	9,506.0	-5,592.4	251.8	5,597.8	0.00	0.00	0.00	
15,000.0	90.00	179.57	9,506.0	-5,692.4	252.6	5,697.8	0.00	0.00	0.00	
15,100.0	90.00	179.57	9,506.0	-5,792.4	253.3	5,797.7	0.00	0.00	0.00	
15,200.0	90.00	179.57	9,506.0	-5,892.4	254.1	5,897.7	0.00	0.00	0.00	



Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Kansas 21/28 WOKN Fed Com #4H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3060.0usft (Original Well Elev)
Project:	Eddy County, New Mexico NAD 83	MD Reference:	WELL @ 3060.0usft (Original Well Elev)
Site:	Kansas 21/28 WOKN Fed Com #4H	North Reference:	Grid
Well:	SL: 2430 FSL & 2100 FWL (Sec 21)	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330 FSL & 2310 FWL (Sec 28)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,300.0	90.00	179.57	9,506.0	-5,992.4	254.8	5,997.7	0.00	0.00	0.00	
15,400.0	90.00	179.57	9,506.0	-6,092.4	255.6	6,097.6	0.00	0.00	0.00	
15,500.0	90.00	179.57	9,506.0	-6,192.4	256.3	6,197.6	0.00	0.00	0.00	
15,600.0	90.00	179.57	9,506.0	-6,292.4	257.1	6,297.5	0.00	0.00	0.00	
15,700.0	90.00	179.57	9,506.0	-6,392.4	257.8	6,397.5	0.00	0.00	0.00	
15,800.0	90.00	179.57	9,506.0	-6,492.4	258.6	6,497.5	0.00	0.00	0.00	
15,900.0	90.00	179.57	9,506.0	-6,592.4	259.3	6,597.4	0.00	0.00	0.00	
16,000.0	90.00	179.57	9,506.0	-6,692.4	260.0	6,697.4	0.00	0.00	0.00	
16,100.0	90.00	179.57	9,506.0	-6,792.4	260.8	6,797.3	0.00	0.00	0.00	
16,200.0	90.00	179.57	9,506.0	-6,892.4	261.5	6,897.3	0.00	0.00	0.00	
16,300.0	90.00	179.57	9,506.0	-6,992.4	262.3	6,997.3	0.00	0.00	0.00	
16,400.0	90.00	179.57	9,506.0	-7,092.3	263.0	7,097.2	0.00	0.00	0.00	
16,500.0	90.00	179.57	9,506.0	-7,192.3	263.8	7,197.2	0.00	0.00	0.00	
16,600.0	90.00	179.57	9,506.0	-7,292.3	264.5	7,297.1	0.00	0.00	0.00	
16,700.0	90.00	179.57	9,506.0	-7,392.3	265.3	7,397.1	0.00	0.00	0.00	
16,758.7	90.00	179.57	9,506.0	-7,451.0	265.7	7,455.7	0.00	0.00	0.00	
BHL: 330 FSL & 2310 FWL (28)										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SL: 2430 FSL & 2100 FV - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	437,527.40	615,236.00	32.2026142	-104.0944153	
KOP: 2430 FSL & 2310 - plan hits target center - Point	0.00	0.00	9,029.0	3.6	210.1	437,531.00	615,446.10	32.2026228	-104.0937360	
FTP: 2340 FSL & 2310 F - plan hits target center - Point	0.00	0.00	9,307.9	-86.4	210.8	437,441.00	615,446.78	32.2023754	-104.0937345	
BHL: 330 FSL & 2310 FV - plan hits target center - Point	0.00	0.00	9,506.0	-7,451.0	265.7	430,076.40	615,501.70	32.1821306	-104.0936100	

Kansas 21/28 W0KN Fed Com #4H

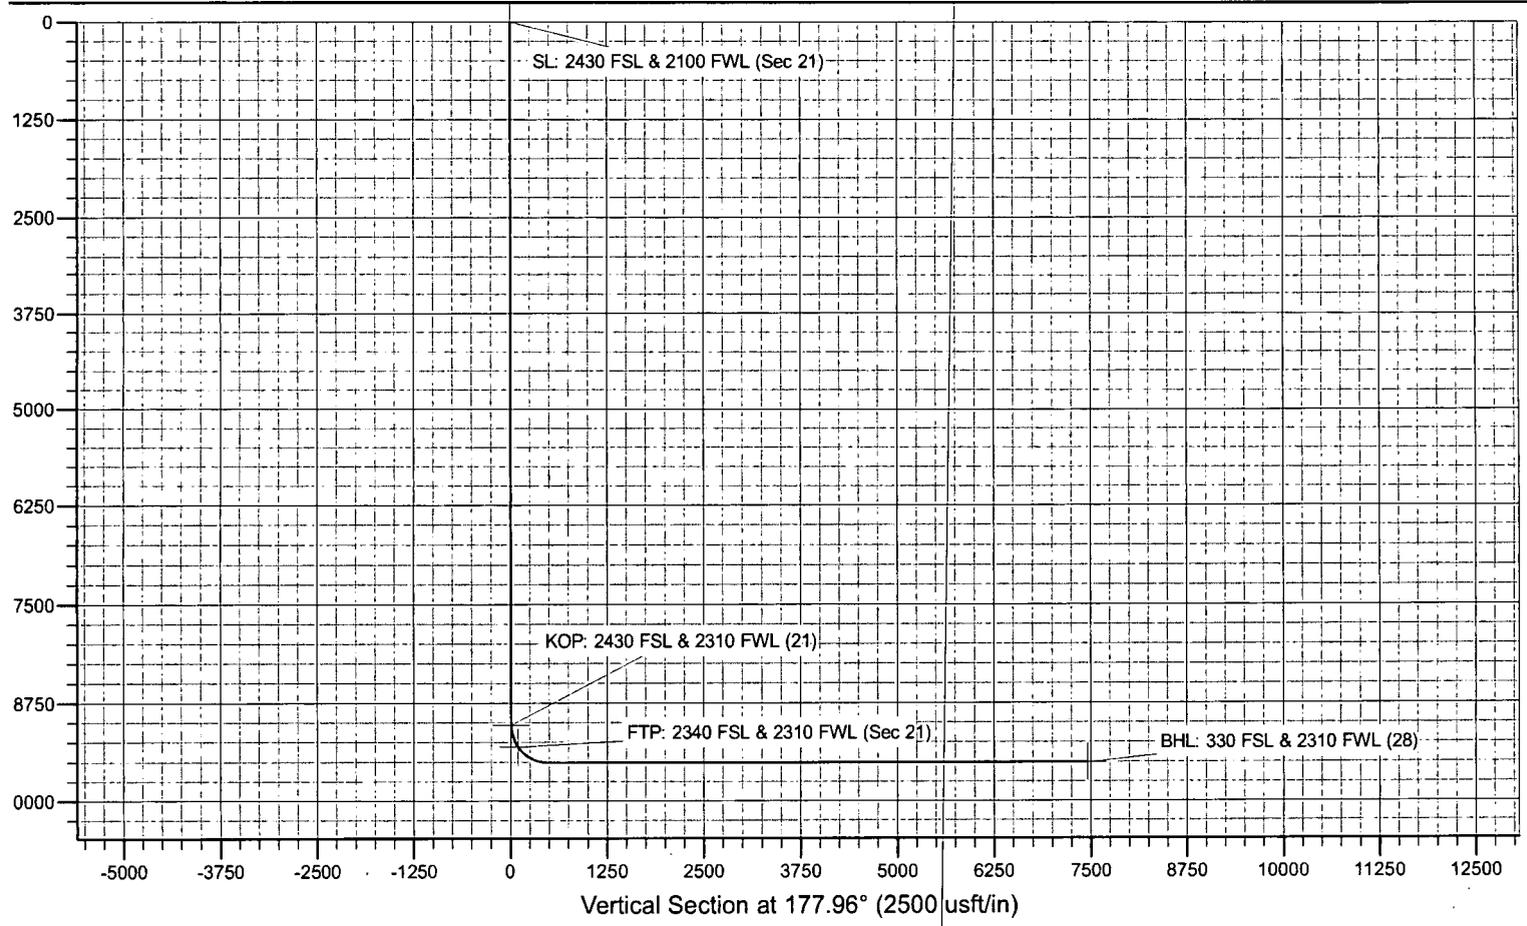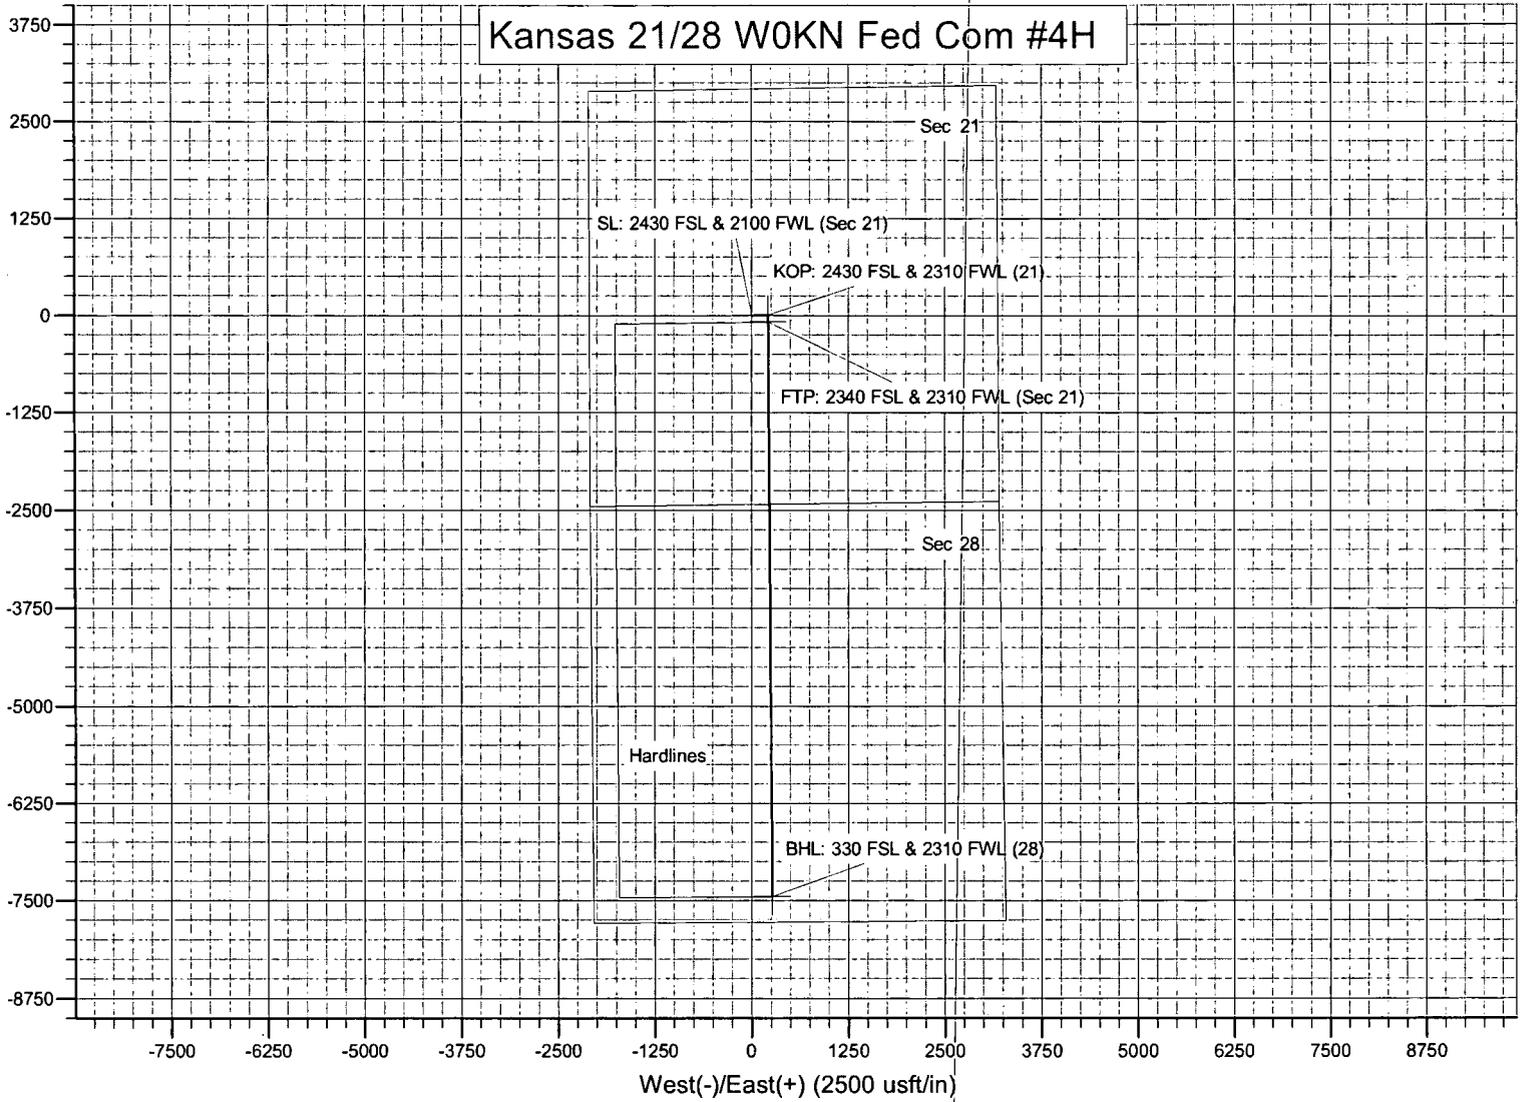

Intent As Drilled

API #

Operator Name: MEWBOURNE OIL COMPANY	Property Name: KANSAS 21/28 W0KN FED COM	Well Number 4H
-----------------------------------------	---------------------------------------------	-------------------

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
K	21	24S	28E		2430	S	2310	W	EDDY
Latitude 32.2026228					Longitude -104.0937360			NAD 83	

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
K	21	24S	28E		2340	S	2310	W	EDDY
Latitude 32.2023754					Longitude -104.0937345			NAD 83	

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
N	28	24S	28E		330	S	2310	W	EDDY
Latitude 32.1821305					Longitude -104.0936099			NAD 83	

Is this well the defining well for the Horizontal Spacing Unit? N

Is this well an infill well? Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #

Operator Name: MEWBOURNE OIL COMPANY	Property Name: KANSAS 21/28 W1LM FED COM	Well Number 2H
-----------------------------------------	---------------------------------------------	-------------------

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

1. Geologic Formations

TVD of target	9506'	Pilot hole depth	NA
MD at TD:	16759'	Deepest expected fresh water:	50'

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Quaternary Fill	Surface		
Rustler			
Top Salt	1070		
Base Salt	2375		
Castile			
Seven Rivers			
Queen			
Grayburg			
Lamar	2510	Oil/Gas	
Bell Canyon	2605	Oil/Gas	
Cherry Canyon	3225	Oil/Gas	
Manzanita Marker	3540		
Brushy Canyon		Oil/Gas	
Bone Spring	6085	Oil/Gas	
1 st Bone Spring Sand	7050	Oil/Gas	
2 nd Bone Spring Sand	7850	Oil/Gas	
3 rd Bone Spring Sand	8965	Oil/Gas	
Abo			
Wolfcamp	9340	Target Zone	
Devonian			
Fusselman			
Ellenburger			
Granite Wash			

*H2S, water flows, loss of circulation, abnormal pressures, etc.

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	425'	13.375"	48	H40	STC	3.96	8.90	15.78	26.52
12.25"	0'	2440'	9.625"	36	J55	LTC	1.59	2.77	5.16	6.42
8.75"	0'	9700'	7"	26	P110	LTC	1.33	2.12	2.75	3.29
6.125"	9032'	16759'	4.5"	13.5	P110	LTC	1.80	2.09	3.24	4.05
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H
Sec 21 & 28, T24S, R28E
SL: 2430' FSL & 2100' FWL, Sec. 21
BHL: 330' FSL & 2310' FWL, Sec. 28

3. Cementing Program

Casing	# Sks	Wt. lb/gal	Yld ft/sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	160	12.5	2.12	11	10	Lead: Class C + Salt + Gel + Extender + LCM
	200	14.8	1.34	6.3	8	Tail: Class C + Retarder
Inter.	320	12.5	2.12	11	10	Lead: Class C + Salt + Gel + Extender + LCM
	200	14.8	1.34	6.3	8	Tail: Class C + Retarder
Prod. Stg 1	330	12.5	2.12	11	9	Lead: Class C + Gel + Retarder + Defoamer + Extender
	400	15.6	1.18	5.2	10	Tail: Class H + Retarder + Fluid Loss + Defoamer
ECP/DV Tool @ 3540'						
Prod. Stg 2	50	12.5	2.12	11	9	Lead: Class C + Gel + Retarder + Defoamer + Extender
	100	14.8	1.34	6.3	8	Tail: Class C + Retarder
Liner	310	11.2	2.97	18	16	Class C + Salt + Gel + Fluid Loss + Retarder + Dispersant + Defoamer + Anti-Settling Agent

A copy of cement test will be available on location at time of cement job providing pump times, compressive strengths, etc.

Casing String	TOC	% Excess
Surface	0'	100%
Intermediate	0'	25%
Production	2240'	25%
Liner	9032'	25%

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H
Sec 21 & 28, T24S, R28E
SL: 2430' FSL & 2100' FWL, Sec. 21
BHL: 330' FSL & 2310' FWL, Sec. 28

4. Pressure Control Equipment

N	Variance: None
---	----------------

BOP installed and tested before drilling which hole?	Size?	System Rated WP	Type	✓	Tested to:
12 1/4"	13 5/8"	5M	Annular	X	2500#
			Blind Ram	X	5000#
			Pipe Ram	X	
			Double Ram		
			Other*		

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. <ul style="list-style-type: none"> • Provide description here: See attached schematic.

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H

Sec 21 & 28, T24S, R28E

SL: 2430' FSL & 2100' FWL, Sec. 21

BHL: 330' FSL & 2310' FWL, Sec. 28

5. Mud Program

Depth (TVD)		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0'	425'	FW Gel	8.6-8.8	28-34	N/C
425'	2440'	Saturated Brine	10.0	28-34	N/C
2440'	9506'	Cut Brine	8.6-9.5	28-34	N/C
9506'	9506'	OBM	10.0-12.0	30-40	<10cc

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. MW up to 13.0 ppg may be required for shale control. The highest MW needed to balance formation pressure is expected to be 12.0 ppg.

What will be used to monitor the loss or gain of fluid?	Pason/PVT/Visual Monitoring
---------------------------------------------------------	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
X	Will run GR/CNL from KOP (9032') to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned	Interval
X Gamma Ray	9032' (KOP) to TD
Density	
CBL	
Mud log	
PEX	

Mewbourne Oil Company: Kansas 21/28 W0KN Fed Com #4H
Sec 21 & 28, T24S, R28E
SL: 2430' FSL & 2100' FWL, Sec. 21
BHL: 330' FSL & 2310' FWL, Sec. 28

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	5932 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers in surface hole. Weighted mud for possible over-pressure in Wolfcamp formation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

	H2S is present
X	H2S Plan attached

8. Other facets of operation

Is this a walking operation? If yes, describe.
 Will be pre-setting casing? If yes, describe.

Attachments

- Directional Plan
- Other, describe

APD ID: 10400040489

Submission Date: 04/22/2019

Highlighted data reflects the most recent changes
[Show Final Text](#)

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Kansas21_28W0KNFedCom4H_existingroadmap_20190401140132.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads


Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Kansas21_28W0KNFedCom4H_existingwellmap_20190401140210.pdf

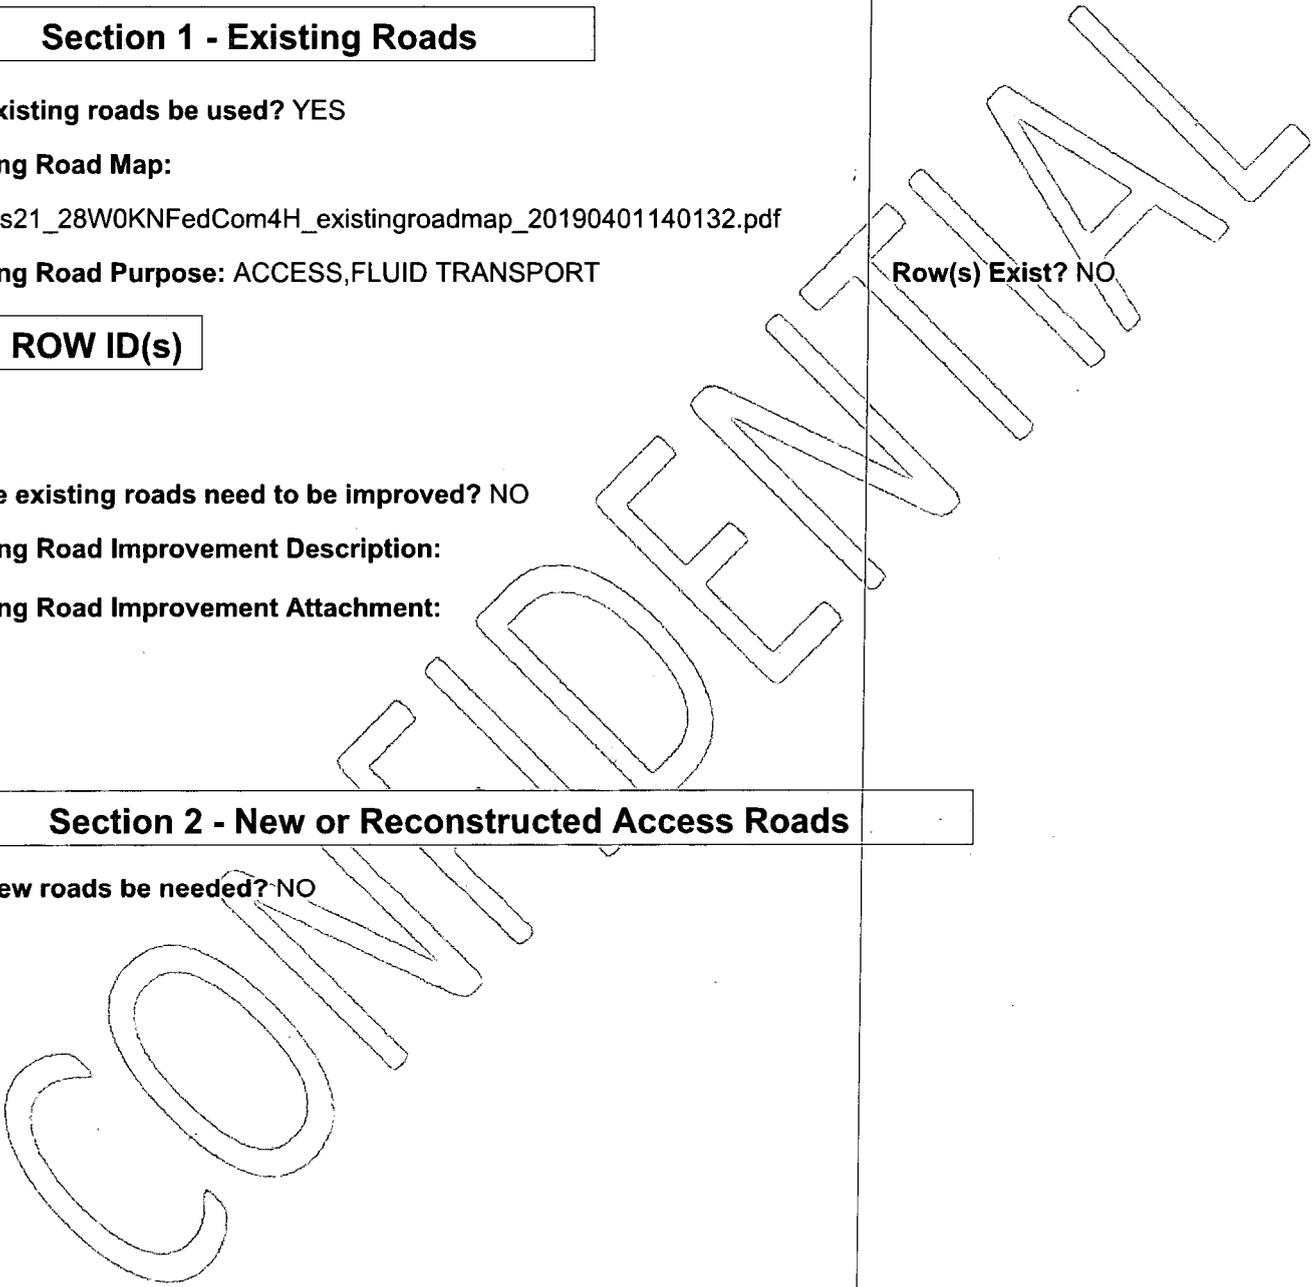

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: 1 – 3.5" buried steel flowline with a working pressure of 250#. 1 – 3.5" buried steel gas line for gas lift purposes with a working pressure of 250#. 1 – 1" buried gas supply line with a working pressure of 150#. These lines will be installed in one ditch following the attached route approximately 950.73' in-length.

Production Facilities map:

Kansas21_28W0KNFedCom4H_productionfacilitymap_20190401140335.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: IRRIGATION

Water source use type:

SURFACE CASING
STIMULATION
DUST CONTROL
CAMP USE
INTERMEDIATE/PRODUCTION
CASING

Source latitude: 32.114094

Source longitude: -104.33775

Source datum: NAD83

Water source permit type: WATER WELL

Water source transport method: TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: STATE

Water source volume (barrels): 1940

Source volume (acre-feet): 0.2500526

Source volume (gal): 81480

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Water source type: IRRIGATION

Water source use type: SURFACE CASING
STIMULATION
DUST CONTROL
INTERMEDIATE/PRODUCTION CASING

Source latitude: 32.32698

Source longitude: -104.21917

Source datum: NAD83

Water source permit type: WATER WELL

Water source transport method: TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: FEDERAL

Water source volume (barrels): 1940

Source volume (acre-feet): 0.2500526

Source volume (gal): 81480

Water source and transportation map:

Kansas21_28W0KNFedCom4H_watersouceandtransmap_20190401140543.pdf

Water source comments: Both sources shown on one map.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Caliche

Construction Materials source location attachment:

Kansas21_28W0KNFedCom4H_calichesouceandtransmap_20190401140557.pdf

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drill cuttings

Amount of waste: 940 barrels

Waste disposal frequency : One Time Only

Safe containment description: Drill cuttings will be properly contained in steel tanks (20 yard roll off bins.)

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.

Waste type: SEWAGE

Waste content description: Human waste & grey water

Amount of waste: 1500 gallons

Waste disposal frequency : Weekly

Safe containment description: 2,000 gallon plastic container

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: City of Carlsbad Water Treatment facility

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Waste type: GARBAGE

Waste content description: Garbage & trash

Amount of waste: 1500 pounds

Waste disposal frequency : One Time Only

Safe containment description: Enclosed trash trailer

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: Waste Management facility in Carlsbad.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? NO

Description of cuttings location

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Kansas21_28W0KNFedCom4H_wellsitelayout_20190401140623.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: KANSAS 21/28 KN FED COM WELLS

Multiple Well Pad Number: 2

Recontouring attachment:

Drainage/Erosion control construction: None

Drainage/Erosion control reclamation: None

Well pad proposed disturbance (acres): 4.5

Well pad interim reclamation (acres): 1.34

Well pad long term disturbance (acres): 3.16

Road proposed disturbance (acres): 0.04

Road interim reclamation (acres): 0

Road long term disturbance (acres): 0

Powerline proposed disturbance (acres): 0

Powerline interim reclamation (acres): 0

Powerline long term disturbance (acres): 0

Pipeline proposed disturbance (acres): 0

Pipeline interim reclamation (acres): 0

Pipeline long term disturbance (acres): 0

Other proposed disturbance (acres): 0

Other interim reclamation (acres): 0

Other long term disturbance (acres): 0

Total proposed disturbance: 4.54

Total interim reclamation: 1.34

Total long term disturbance: 3.16

Disturbance Comments: In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

Soil treatment: NA

Existing Vegetation at the well pad: Various brush & grasses

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Various brush & grasses

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: NA

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: NA

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type

Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

First Name:

Last Name:

Phone: (575)393-5905

Email: bbishop@mewbourne.com

Seedbed prep: Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Seed BMP: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

Seed method: drilling or broadcasting seed over entire reclaimed area.

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: NA

Weed treatment plan attachment:

Monitoring plan description: vii. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, and that erosion and invasive/noxious weeds are controlled.

Monitoring plan attachment:

Success standards: regrowth within 1 full growing season of reclamation.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Fee Owner: PVACD

Fee Owner Address:

Phone: (575)622-7000

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: SUA in place

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Disturbance type: WELL PAD

Describe:

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Fee Owner: PVACD

Fee Owner Address:

Phone: (575)622-7000

Email:

Surface use plan certification: NO

Surface use plan certification document:

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: SUA in place

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information: NONE


Use a previously conducted onsite? YES

Previous Onsite information: MAR 07 2019 Met w/RRC Surveying & staked location @ 2435' FSL & 2100' FWL, Sec 21, T24S, R28E, Eddy Co., NM. This location was unacceptable due to MOC buried pipeline ROW. Re-staked location @ 2430' FSL & 2100' FWL, Sec 21, T24S, R28E, Eddy Co., NM. (Elevation @ 3033'). Pad is 400 x 490. Topsoil S. Reclaim 60 S, E & W. No new road needed. Flow line staked back to the Creedence 21/16 ED pad on approved ROW. Location is in the PA. Lat. 32.20261417 N, Long. -104.0941537 W NAD83

Other SUPO Attachment

Kansas21_28W0KNFedCom4H_gascaptureplan_20190401141139.pdf

Kansas21_28W0KNFedCom4H_interimreclamationdiagram_20190401141148.pdf



VICINITY MAP

NOT TO SCALE



*SECTION 21, TWP. 24 SOUTH, RGE. 28 EAST,
N. M. P. M., EDDY CO., NEW MEXICO*

OPERATOR: Mewbourne Oil Company
 LEASE: Kansas 21/28 WOKN Fed Com
 WELL NO.: 4H

LOCATION: 2430' FSL & 2100' FWL
 ELEVATION: 3033'

Copyright 2016 - All Rights Reserved

RRC

SCALE: N. T. S.
 DATE: 03-06-2019
 SURVEYED BY: ML/JC
 DRAWN BY: KAKN
 APPROVED BY: RMH
 SHEET: 1 OF 1


NO.	REVISION	DATE

JOB NO.: LS19030322
 DWG. NO.: 19030322-3

701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

EXISTING WELL MAP

KANSAS 21/28 W0KN FEDERAL COM WELL #4H

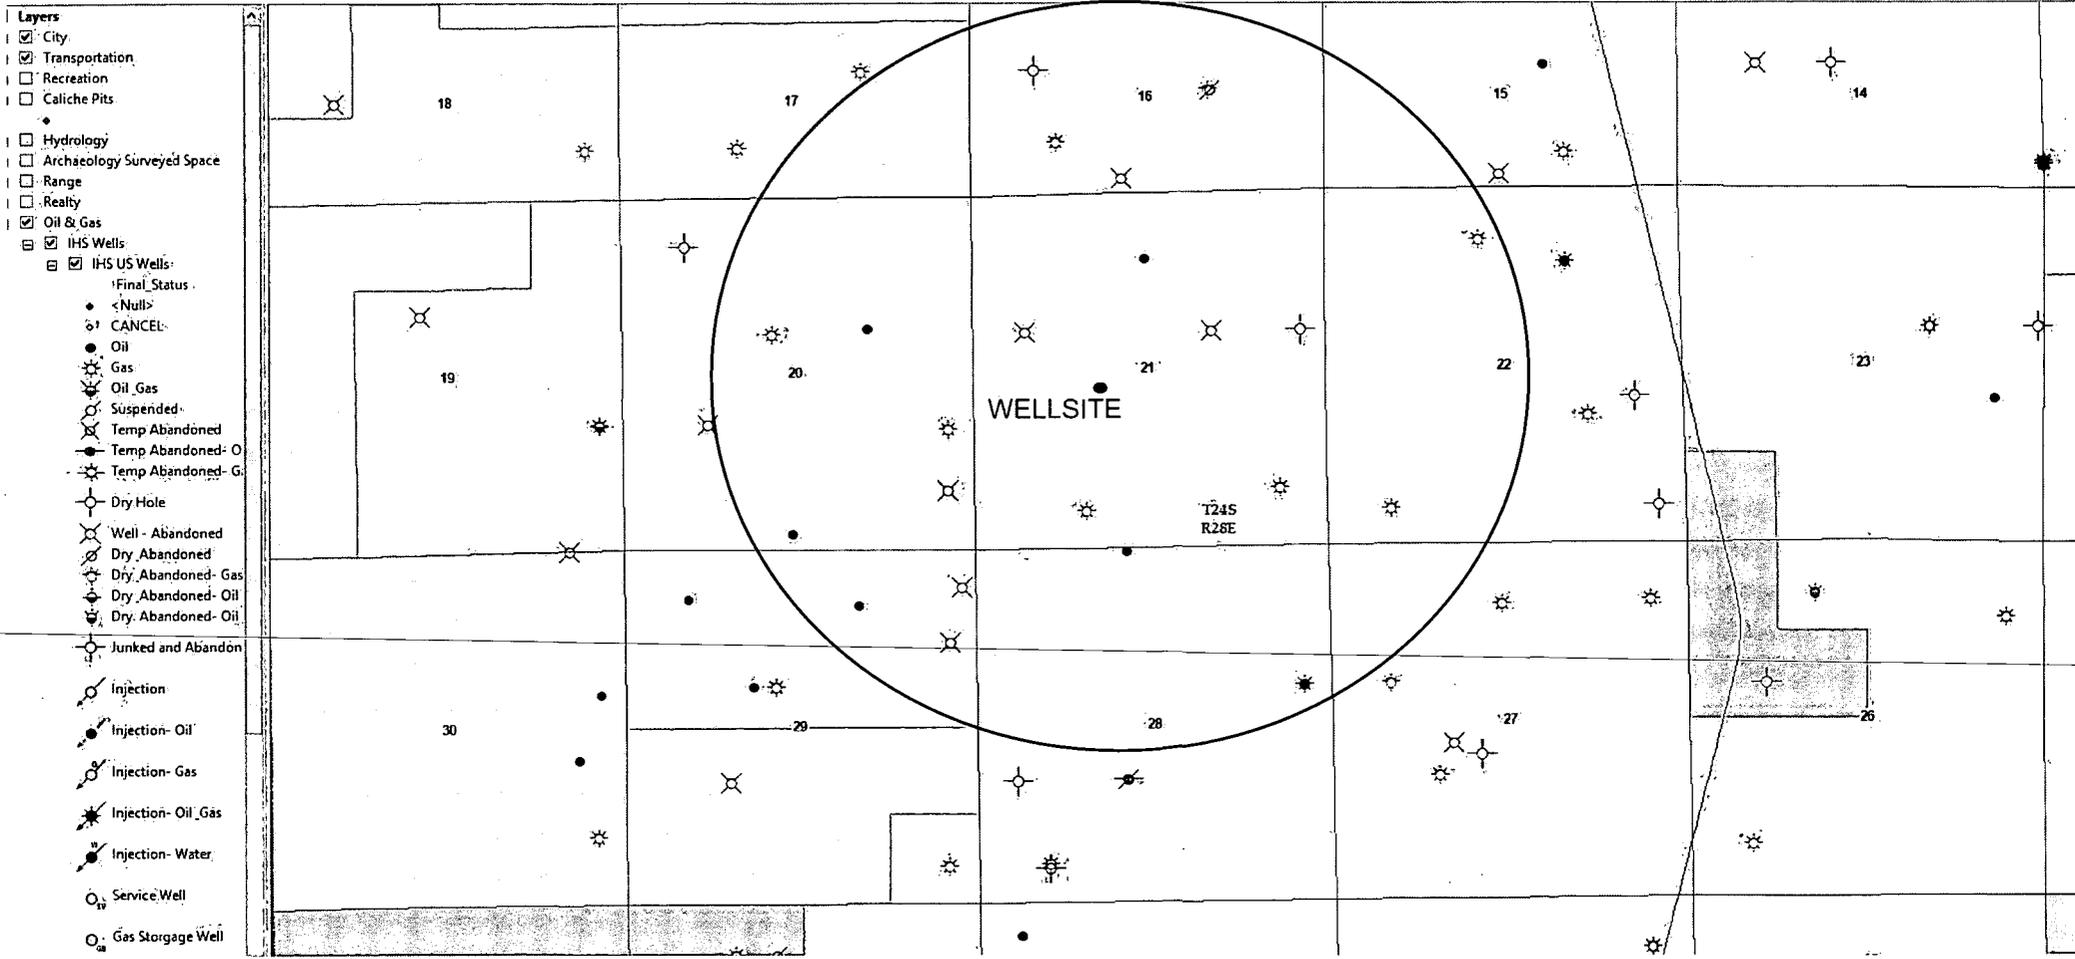

SENE

SWNW

Coordinates 2110 W2ED & Com
Coordinates 2110 W2ED & Com


Coordinates 2110 W2ED & Com
Coordinates 2110 W2ED & Com

BATTERY

NESE

NWSW

**MEWBOURNE OIL COMPANY
 KANSAS 21/28 WOKN FED COM #4H
 (2430' FSL & 2100' FWL)
 SECTION 21, T24S, R28E
 N. M. P. M., EDDY COUNTY, NEW MEXICO**

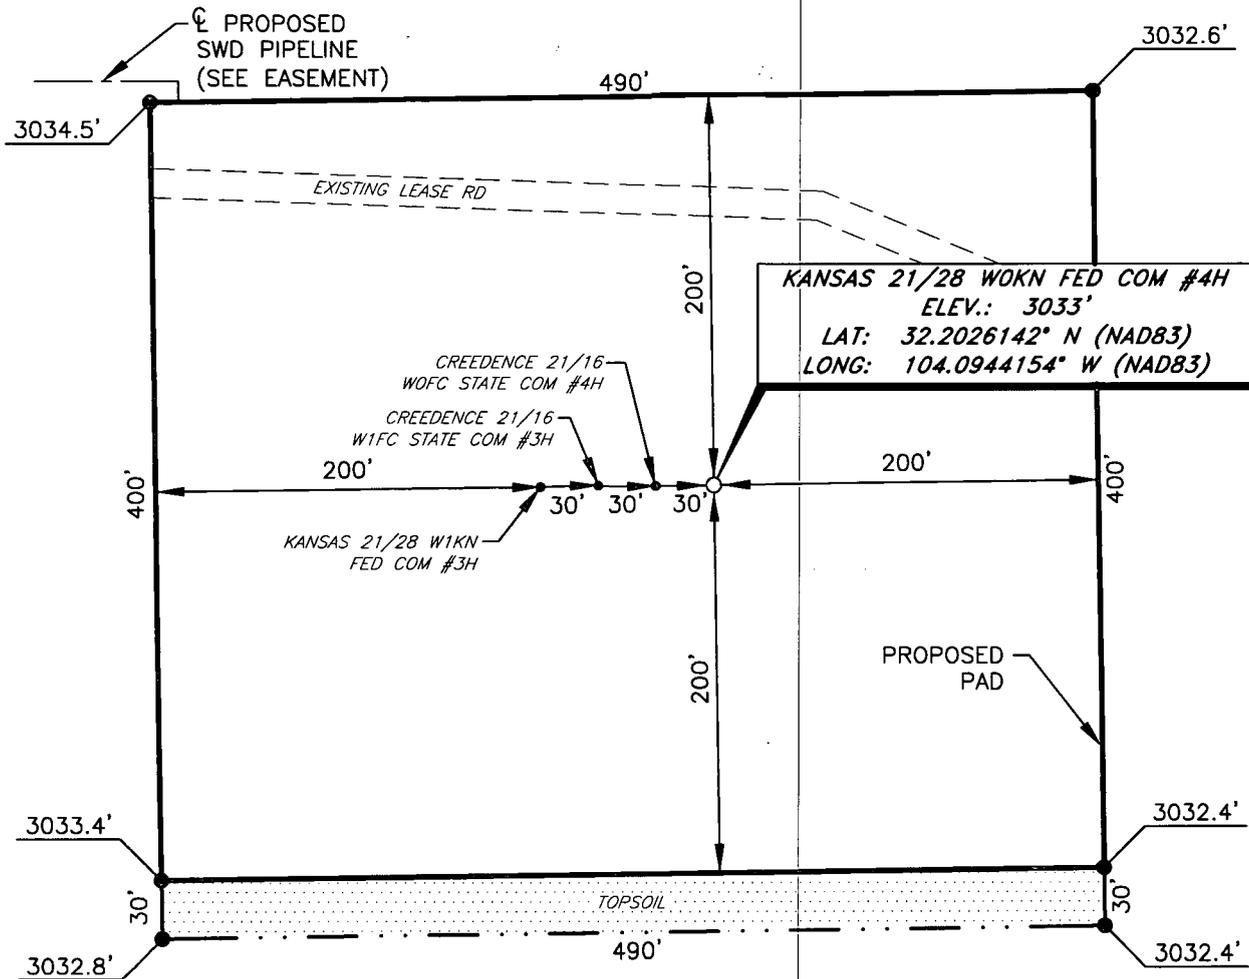


KANSAS 21/28 WOKN FED COM #4H
 ELEV.: 3033'
 LAT: 32.2026142° N (NAD83)
 LONG: 104.0944154° W (NAD83)

DIRECTIONS TO LOCATION

*From the intersection of US Hwy 285 and CR-721 (Pulley Rd.);
 Go North on US-285 approx. 0.6 miles to a lease road on the left;
 Turn left and go West approx. 0.9 miles to a lease road on the left;
 Turn left and go Southwest approx. 0.8 miles to a lease road on the right;
 Turn right and go Northwest approx. 0.3 miles to a lease road on the left;
 Turn left and go West approx. 290 feet to proposed location on the left.*



**MEWBOURNE OIL COMPANY
 KANSAS 21/28 WOKN FED COM #4H
 (2430' FSL & 2100' FWL)
 SECTION 21, T24S, R28E
 N. M. P. M., EDDY COUNTY, NEW MEXICO**

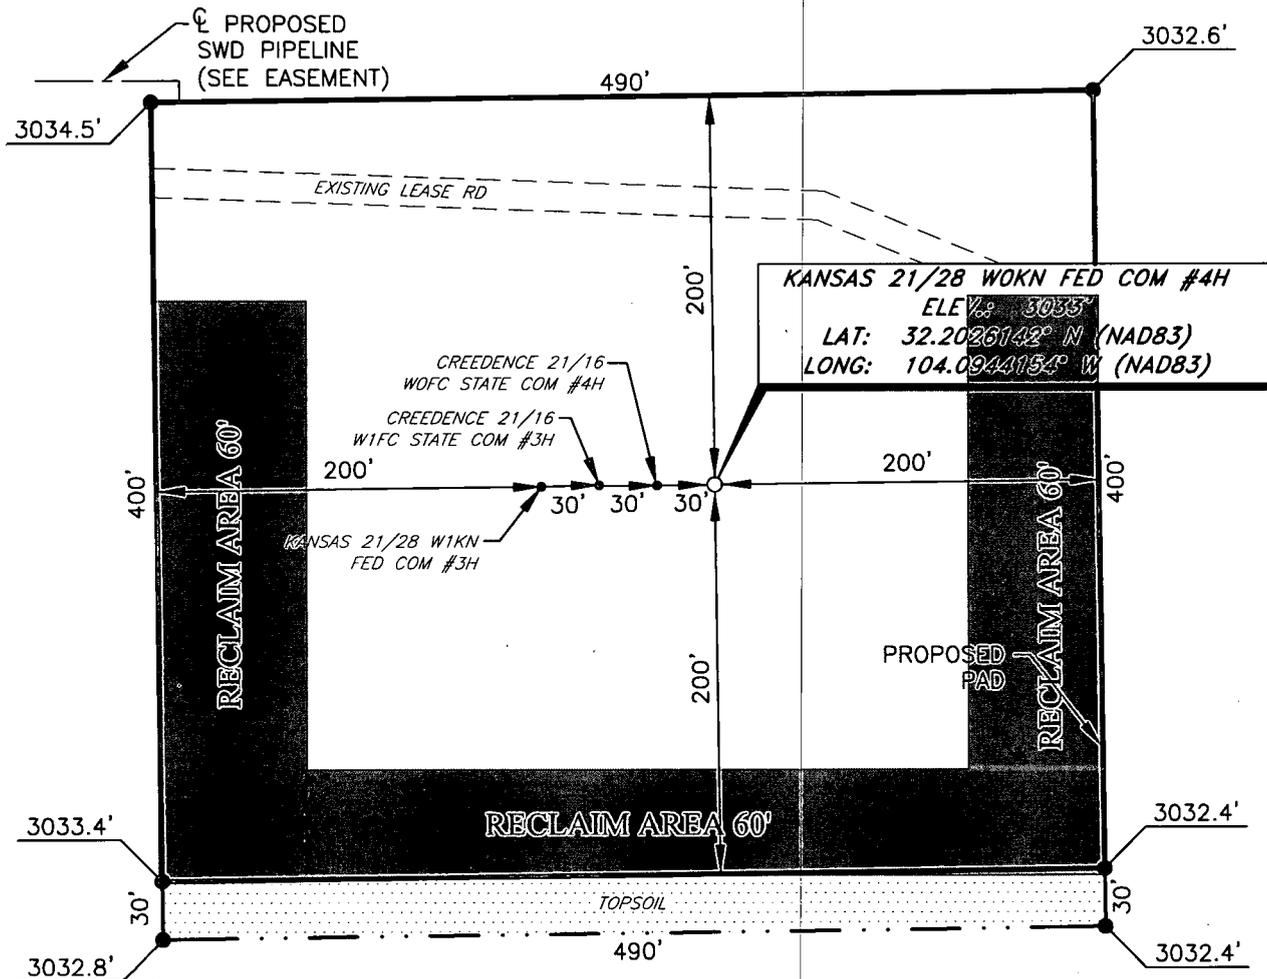

DIRECTIONS TO LOCATION

*From the intersection of US Hwy 285 and CR-721 (Pulley Rd.);
 Go North on US-285 approx. 0.6 miles to a lease road on the left;
 Turn left and go West approx. 0.9 miles to a lease road on the left;
 Turn left and go Southwest approx. 0.8 miles to a lease road on the right;
 Turn right and go Northwest approx. 0.3 miles to a lease road on the left;
 Turn left and go West approx. 290 feet to proposed location on the left.*





APD ID: 10400040489

Submission Date: 04/22/2019

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



APD ID: 10400040489

Submission Date: 04/22/2019

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: MEWBOURNE OIL COMPANY

Well Name: KANSAS 21/28 W0KN FED COM

Well Number: 4H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: NM1693

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:



Application for Permit to Drill

APD Package Report

Date Printed: 01/15/2020 03:47 PM

APD ID: 10400038747	Well Status: AAPD
APD Received Date: 02/15/2019 02:03 PM	Well Name: HEREFORD 29/20 B2OB FED
Operator: MEWBOURNE OIL COMPANY	Well Number: 1H

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 2 file(s)
 - Blowout Prevention BOP Diagram Attachment: 2 file(s)
 - Casing Design Assumptions and Worksheet(s): 4 file(s)
 - Hydrogen sulfide drilling operations plan: 1 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 2 file(s)
 - Other Facets: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Construction Materials source location attachment: 1 file(s)
 - Well Site Layout Diagram: 1 file(s)
 - Other SUPO Attachment: 2 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report

- Bond Attachments
-- None

