


Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 87240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

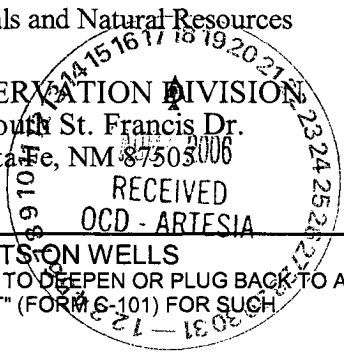

WELL API NO. 30-015-34549
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. VO-6154-1
7. Lease Name or Unit Agreement Name: OXY Pogo State
8. Well Number 1
9. OGRID Number 192463
10. Pool name or Wildcat Undsq. Otis Morrow

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM G-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other
2. Name of Operator OXY USA WTP Limited Partnership
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250
4. Well Location Unit Letter <u>I</u> : <u>1980</u> feet from the <u>south</u> line and <u>990</u> feet from the <u>east</u> line Section <u>36</u> Township <u>22S</u> Range <u>27E</u> NMPM County <u>Eddy</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3070'
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 8/18/06

Type or print name David Stewart

E-mail address: david\_stewart@oxy.com  
Telephone No. 432-685-5717

For State Use Only

FOR RECORDS ONLY

AUG 18 2006

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

Conditions of Approval, if any:

**OXY Pogo State #1**

TD - 12540'      PBSD - 11096'

Perfs - 12101-12282' - CIBP @ 12090'

Perfs - 11946-12080' - CIBP @ 11900' w/ 16sx cmt to 11807'

Perfs - 11146-11234' - CIBP @ 11096'

13-3/8" 48# csg @ 438' w/ 700sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 36# csg @ 2528' w/ 760sx, 12-1/4" hole, TOC-Surf-Circ

7" 26# csg @ 9509' w/ 1280sx, 8-3/4" hole, TOC-Surf-Circ

4-1/2" 11.6# liner @ 8910-12540' w/ 300sx, 6-1/4" hole, TOC-8910'-Circ

1. RIH & Tag CIBP @ 11096', dump 3sx cmt to 11061'

2. M&P 25sx cmt @ 8960-8860'

3. M&P 30sx cmt @ 5840-5740'

4. M&P 30sx cmt @ 5064-4964'

5. M&P 30sx cmt @ 2578-2478'

6. M&P 30sx cmt @ 488-388'

7. M&P 15sx cmt surface plug

10# MLF between plugs

OXY USA WTP LP - Proposed  
OXY Pogo State #1  
API No. 30-015-34549

15sx Surface

30sx @ 488-388'

30sx @ 2578-2478'

30sx @ 5064-4964'

30sx @ 5840-5740'

25sx @ 8960-8860'

Dump 3sx @ 11096-11061'

CIBP @ 11096'

CIBP @ 11900' w/16sx to 11807'

CIBP @ 12090'

PBTD-12383'

TD-12540'

17-1/2" hole @ 438'

13-3/8" csg @ 438'

w/700sx-TOC-Surf-Circ

12-1/4" hole @ 2528'

9-5/8" csg @ 2528'

w/760sx-TOC-Surf-Circ

8-3/4" hole @ 9509'

7" csg @ 9509'

DV Tool @ 5014'

1st w/530sx-TOC-5014'-Calc

2nd w/750sx-TOC-Surf-Circ

Perfs @ 11146-11234'

6-1/4" hole @ 12540'


4-1/2" liner @ 8910-12540'

w/300sx-TOC-9314'-CBL

Perfs @ 11946-12080'

Perfs @ 12101-12282'

OXY USA WTP LP - Current  
OXY Pogo State #1  
API No. 30-015-34549

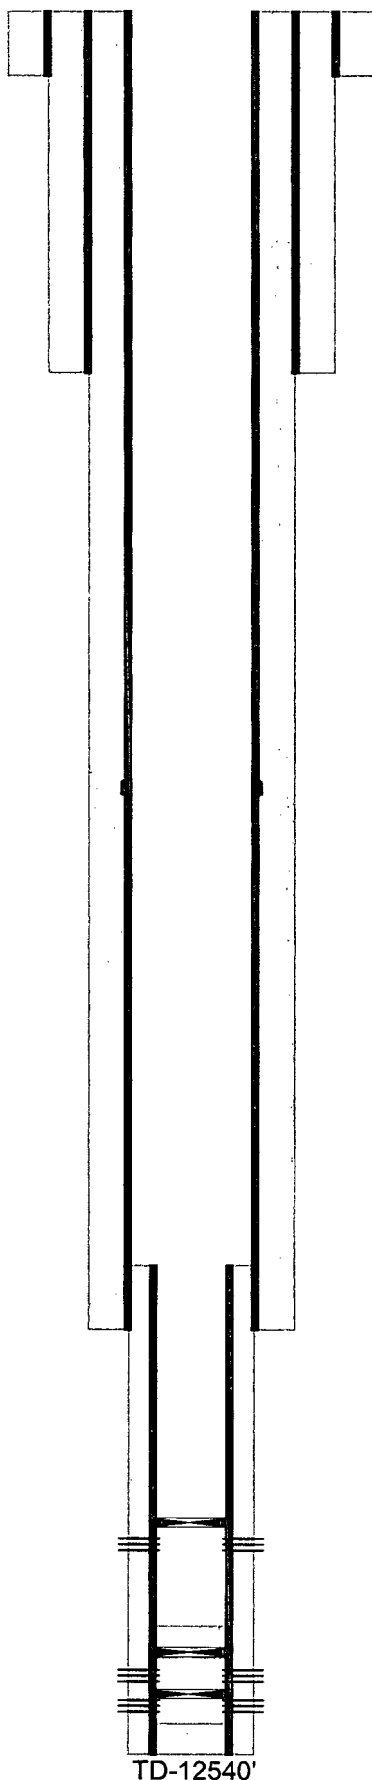

17-1/2" hole @ 438'  
13-3/8" csg @ 438'  
w/700sx-TOC-Surf-Circ

12-1/4" hole @ 2528'  
9-5/8" csg @ 2528'  
w/760sx-TOC-Surf-Circ

8-3/4" hole @ 9509'  
7" csg @ 9509'  
DV Tool @ 5014'  
1st w/530sx-TOC-5014'-Calc  
2nd w/750sx-TOC-Surf-Circ

CIBP @ 11096'

CIBP @ 11900' w/16sx to 11807'

CIBP @ 12090'

PBTD-12383'

Perfs @ 11146-11234'

6-1/4" hole @ 12540'  
4-1/2" liner @ 8910-12540'  
w/300sx-TOC-9314'-CBL

Perfs @ 11946-12080'

Perfs @ 12101-12282'

TD-12540'