

Submit To: Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies District I 1625 N French Dr, Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd, Aztec, NM 87410 District IV 1220 S. St Francis Dr, Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505		Form C-105 Revised June 10, 2003 WELL API NO. 30-015-35278 5. Indicate Type of Lease STATE ☒ FEE ☐ State Oil & Gas Lease No. 36202		
WELL COMPLETION OR RECOMPLETION REPORT AND LOG						
1a. Type of Well: OIL WELL ☐ GAS WELL ☒ DRY ☐ OTHER ☐ 2. Name of Operator LCX Energy, LLC			7. Lease Name or Unit Agreement Name BIG DOG STATE UNIT 8. Well No. 202			
3. Address of Operator 110 N. Marienfeld, Ste 200, Midland, TX 79701			9. Pool name or Wildcat FOUR MILE DRAW; WOLFCAMP (G)			
4. Well Location Unit Letter <u>A:660</u> Feet From The <u>NORTH</u> Line and <u>760</u> Feet From The <u>EAST</u> Line Section <u>20</u> Township <u>18S</u> Range <u>23E</u> NMPM County <u>EDDY</u>						
10. Date Spudded 3/21/2007		11. Date T D. Reached 4/18/2007		12. Date Compl. (Ready to Prod.) 5/31/2007		
13. Elevations (DF& RKB, RT, GR, etc) 3996 GR		14. Elev. Casinghead		15. Total Depth 8199'		
16. Plug Back T.D. 8151		17. If Multiple Compl. How Many Zones? 1		18. Intervals Drilled By ☒ Rotary Tools ☐ Cable Tools		
19. Producing Interval(s), of this completion - Top, Bottom, Name 4750-8125				20. Was Directional Survey Made Yes		
21. Type Electric and Other Logs Run Density/Neutron				22. Was Well Cored No		
23. CASING RECORD (Report all strings set in well)						
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		
13 3/8		48		391		
9 5/8		36		1340		
5 1/2		17		8199		
24. LINER RECORD						
SIZE		TOP		BOTTOM		
25. TUBING RECORD						
SIZE		DEPTH SET		PACKER SET		
2 3/8		4782				
26. Perforation record (interval, size, and number)						
7300-8125 62 shots						
6500-7100 50 shots						
5700-6300 50 shots						
4750-5500 52 shots						
27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.						
DEPTH INTERVAL			AMOUNT AND KIND MATERIAL USED			
4750-8125			Frac w/29656 15% acid, 8000 20/40 sand,			
			48000 14/30 LiteProp 125			
28. PRODUCTION						
Date First Production 6/30/2007		Production Method (Flowing, gas lift, pumping - Size and type pump) Pumping			Well Status (Prod. or Shut-in) Producing	
Date of Test 7/1/2007		Hours Tested 24		Choke Size		
Flow Tubing Press 800		Casing Pressure		Calculated 24-Hour Rate		
Prod'n For Test Period		Oil - Bbl		Gas - MCF		
0		1216		0		
Water - Bbl.		Gas - Oil Ratio				
0		0				
29 Disposition of Gas (Sold, used for fuel, vented, etc.) Sold				Test Witnessed By Billy Walker		
30 List Attachments Logs						
31 I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief						
Signature Jennifer Sorley		Printed Name Jennifer Sorley		Title Regulatory Analyst		
E-mail Address Jennifer@eeronline.com				Date 1/28/2008		

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depth shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres 835	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta 1800	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb 2810	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo 3470	T.	T. Wingate	T.
T. Wolfcamp	T.	T. Chinle	T.
T. Penn	T.	T. Permian	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....
No. 2, from.....to.....
No. 3, from.....to.....
No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology
3350	3470	120	Dolomite
3470	4280	810	Dolomite, Shale
4280	6610	2330	Dolomite
6610	6780	170	Did not sample
6780	8198	1418	Dolomite

Survey Report


Report Date: April 17, 2007	Survey / DLS Computation Method: Minimum Curvature / Lubinski
Client: LCX Energy	Vertical Section Azimuth: 181.320°
Field: Eddy County, NM Nad 83	Vertical Section Origin: N 0 000 ft, E 0 000 ft
Structure / Slot: Big Dog State Unit #202 / Big Dog State Unit #202	TVD Reference Datum: RKB
Well: Big Dog State Unit #202	TVD Reference Elevation: 0.0 ft relative to
Borehole: Big Dog State Unit #202	Sea Bed / Ground Level Elevation: 0.000 ft relative to
UWI/API#:	Magnetic Declination: 8.626°
Survey Name / Date: Big Dog State Unit #202_surveys / April 9, 2007	Total Field Strength: 49258.065 nT
Tort / AHD / DDI / ERD ratio: 140.520° / 4088.42 ft / 6.023 / 0.914	Magnetic Dip: 60.568°
Grid Coordinate System: NAD83 New Mexico State Planes, Eastern Zone, US Feet	Declination Date: April 08, 2007
Location Lat/Long: N 32 44 19.900, W 104 42 25.700	Magnetic Declination Model: IGRF 2005
Location Grid N/E Y/X: N 632732 115 ftUS, E 426400 739 ftUS	North Reference: Grid North
Grid Convergence Angle: -0 20216020°	Total Corr Mag North -> Grid North: +8 828°
Grid Scale Factor: 0 99992422	Local Coordinates Referenced To: Well Head

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Mag / Grav Tool Face (deg)
Tie-In	3870.00	0.19	19.83	3868.74	-3.69	5.57	-81.36	81.55	273.92	0.49	183.00M
	3909.00	3.50	183.00	3907.71	-2.56	4.44	-81.40	81.52	273.12	9.44	178.10M
	3940.00	7.70	178.10	3938.56	0.46	1.42	-81.38	81.39	271.00	13.62	4.29L
	3971.00	11.80	176.60	3969.11	5.69	-3.82	-81.12	81.21	267.30	13.25	4.55R
	4003.00	15.50	177.70	4000.20	13.22	-11.36	-80.75	81.55	261.99	11.59	1.77R
	4034.00	19.90	178.10	4029.72	22.63	-20.78	-80.41	83.05	255.51	14.20	2.11R
	4065.00	23.10	178.40	4058.56	33.97	-32.14	-80.07	86.28	248.13	10.33	7.81R
	4096.00	24.30	178.80	4086.95	46.42	-44.59	-79.76	91.38	240.79	3.91	HS
	4128.00	25.90	178.80	4115.92	59.98	-58.16	-79.48	98.49	233.80	5.00	HS
	4159.00	28.90	178.80	4143.44	74.23	-72.42	-79.18	107.31	227.55	9.68	6.83R
	4190.00	32.00	179.50	4170.16	89.93	-88.13	-78.95	118.32	221.86	10.07	8.40R
	4222.00	34.70	180.20	4196.89	107.51	-105.72	-78.91	131.92	216.74	8.52	9.99R
	4253.00	37.10	180.90	4222.00	125.69	-123.90	-79.09	146.99	212.55	7.85	4.07R
	4284.00	39.80	181.20	4246.28	144.96	-143.17	-79.44	163.73	209.03	8.73	11.55L
	4315.00	42.10	180.50	4269.69	165.28	-163.48	-79.74	181.89	206.00	7.57	15.17L
	4346.00	44.70	179.50	4292.21	186.57	-184.78	-79.74	201.25	203.34	8.67	10.46L
	4376.00	47.50	178.80	4313.01	208.17	-206.39	-79.41	221.14	201.05	9.48	HS
	4407.00	51.00	178.80	4333.24	231.62	-229.87	-78.92	243.04	198.95	11.29	5.79L
	4439.00	54.20	178.40	4352.68	257.01	-255.28	-78.30	267.01	197.05	10.05	HS
	4470.00	57.00	178.40	4370.19	282.56	-280.84	-77.58	291.36	195.44	9.03	7.85R
	4502.00	59.50	178.80	4387.03	309.73	-308.04	-76.92	317.50	194.02	7.88	12.49R
	4533.00	62.30	179.50	4402.10	336.80	-335.12	-76.52	343.75	192.86	9.25	4.03R
	4564.00	66.20	179.80	4415.57	364.70	-363.04	-76.35	370.98	191.88	12.61	9.36R
	4595.00	70.20	180.50	4427.08	393.47	-391.82	-76.43	399.20	191.04	13.07	16.81R
	4627.00	73.70	181.60	4436.99	423.89	-422.23	-76.99	429.19	190.33	11.42	5.22R
	4658.00	76.90	181.90	4444.86	453.87	-452.20	-77.91	458.86	189.78	10.36	6.09R
	4689.00	80.60	182.30	4450.90	484.27	-482.58	-79.02	489.00	189.30	12.00	HS
	4721.00	83.80	182.30	4455.25	515.97	-514.25	-80.29	520.48	188.87	10.00	6.17L
	4752.00	87.50	181.90	4457.60	546.87	-545.14	-81.43	551.18	188.50	12.00	HS
	4783.00	90.30	181.90	4458.19	577.86	-576.11	-82.45	581.98	188.14	9.03	HS
	4815.00	91.10	181.90	4457.80	609.85	-608.09	-83.51	613.80	187.82	2.50	78.68L
	4846.00	91.30	180.90	4457.15	640.85	-639.07	-84.27	644.61	187.51	3.29	149.74L
	4909.00	88.90	179.50	4457.04	703.83	-702.07	-84.49	707.13	186.86	4.41	90.00L
	4971.00	88.90	179.10	4458.23	765.78	-764.05	-83.73	768.63	186.25	0.65	HS
	5034.00	89.20	179.10	4459.28	828.72	-827.03	-82.74	831.16	185.71	0.48	23.20L
	5096.00	89.90	178.80	4459.76	890.67	-889.02	-81.61	892.76	185.24	1.23	18.43R
	5159.00	90.80	179.10	4459.38	953.61	-952.01	-80.45	955.40	184.83	1.51	HS
	5222.00	91.30	179.10	4458.22	1016.55	-1014.99	-79.46	1018.10	184.48	0.79	158.20R

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Mag / Grav Tool Face (deg)
	5284.00	90.30	179.50	4457.36	1078.51	-1076.98	-78.71	1079.85	184.18	1.74	164.06L
	5347.00	88.90	179.10	4457.80	1141.46	-1139.97	-77.94	1142.63	183.91	2.31	105.96R
	5409.00	88.50	180.50	4459.20	1203.42	-1201.95	-77.72	1204.46	183.70	2.35	23.96R
	5471.00	89.40	180.90	4460.34	1265.41	-1263.94	-78.48	1266.37	183.55	1.59	63.44L
	5534.00	89.60	180.50	4460.89	1328.40	-1326.93	-79.25	1329.29	183.42	0.71	30.96L
	5595.00	90.10	180.20	4461.05	1389.39	-1387.93	-79.62	1390.21	183.28	0.96	90.00R
	5656.00	90.10	180.50	4460.94	1450.39	-1448.93	-79.99	1451.13	183.16	0.49	HS
	5718.00	90.40	180.50	4460.67	1512.38	-1510.92	-80.53	1513.07	183.05	0.48	90.00L
	5780.00	90.40	180.20	4460.24	1574.37	-1572.92	-80.91	1575.00	182.94	0.48	HS
	5843.00	90.60	180.20	4459.69	1637.35	-1635.92	-81.13	1637.93	182.84	0.32	163.30R
	5906.00	89.60	180.50	4459.58	1700.34	-1698.92	-81.52	1700.87	182.75	1.66	LS
	5967.00	89.00	180.50	4460.33	1761.33	-1759.91	-82.05	1761.82	182.67	0.98	45.00R
	6029.00	89.40	180.90	4461.19	1823.32	-1821.90	-82.81	1823.78	182.60	0.91	18.44R
	6090.00	90.30	181.20	4461.35	1884.32	-1882.89	-83.93	1884.76	182.55	1.56	71.56L
	6152.00	90.40	180.90	4460.97	1946.32	-1944.88	-85.06	1946.74	182.50	0.51	63.43L
	6214.00	90.60	180.50	4460.43	2008.31	-2006.87	-85.82	2008.70	182.45	0.72	165.96L
	6276.00	89.40	180.20	4460.43	2070.30	-2068.87	-86.20	2070.66	182.39	2.00	116.57L
	6339.00	89.20	179.80	4461.20	2133.28	-2131.86	-86.20	2133.60	182.32	0.71	30.96L
	6403.00	89.70	179.50	4461.82	2197.25	-2195.86	-85.81	2197.53	182.24	0.91	32.01R
	6467.00	90.50	180.00	4461.70	2261.23	-2259.86	-85.53	2261.47	182.17	1.47	128.66L
	6531.00	90.10	179.50	4461.37	2325.20	-2323.85	-85.25	2325.42	182.10	1.00	54.46L
	6595.00	90.60	178.80	4460.98	2389.15	-2387.84	-84.30	2389.33	182.02	1.34	126.87L
	6658.00	90.30	178.40	4460.48	2452.08	-2450.82	-82.76	2452.22	181.93	0.79	90.00L
	6722.00	90.30	177.70	4460.15	2515.97	-2514.79	-80.58	2516.08	181.84	1.09	90.00R
	6785.00	90.30	178.10	4459.82	2578.86	-2577.74	-78.27	2578.93	181.74	0.63	135.00R
	6849.00	89.60	178.80	4459.87	2642.78	-2641.72	-76.54	2642.83	181.66	1.55	90.00L
	6913.00	89.60	178.40	4460.32	2706.71	-2705.70	-74.98	2706.74	181.59	0.62	122.48R
	6977.00	88.90	179.50	4461.16	2770.64	-2769.68	-73.81	2770.66	181.53	2.04	HS
	7040.00	89.00	179.50	4462.31	2833.60	-2832.67	-73.26	2833.61	181.48	0.16	56.31R
	7104.00	89.20	179.80	4463.32	2897.57	-2896.66	-72.87	2897.57	181.44	0.56	45.00R
	7168.00	89.60	180.20	4463.99	2961.55	-2960.65	-72.87	2961.55	181.41	0.88	HS
	7232.00	89.90	180.20	4464.27	3025.53	-3024.65	-73.09	3025.54	181.38	0.47	138.83R
	7295.00	88.30	181.60	4465.26	3088.52	-3087.63	-74.08	3088.52	181.37	3.37	HS
	7359.00	88.50	181.60	4467.04	3152.49	-3151.58	-75.86	3152.50	181.38	0.31	23.20R
	7423.00	89.20	181.90	4468.33	3216.48	-3215.54	-77.82	3216.48	181.39	1.19	23.20L
	7486.00	89.90	181.60	4468.82	3279.48	-3278.51	-79.74	3279.48	181.39	1.21	45.00L
	7549.00	90.60	180.90	4468.55	3342.47	-3341.49	-81.12	3342.48	181.39	1.57	161.56R
	7613.00	89.70	181.20	4468.38	3406.47	-3405.48	-82.29	3406.47	181.38	1.48	HS
	7677.00	90.30	181.20	4468.38	3470.47	-3469.47	-83.63	3470.47	181.38	0.94	45.00L
	7741.00	90.60	180.90	4467.88	3534.47	-3533.45	-84.80	3534.47	181.37	0.66	LS
	7803.00	90.10	180.90	4467.50	3596.47	-3595.44	-85.78	3596.47	181.37	0.81	90.00L
	7867.00	90.10	180.20	4467.39	3660.46	-3659.44	-86.39	3660.46	181.35	1.09	141.34L
	7930.00	89.60	179.80	4467.55	3723.44	-3722.44	-86.39	3723.44	181.33	1.02	161.57L
	7994.00	88.70	179.50	4468.50	3787.41	-3786.43	-86.00	3787.41	181.30	1.48	30.96R
	8057.00	89.20	179.80	4469.66	3850.37	-3849.42	-85.61	3850.37	181.27	0.93	78.70L
	8120.00	89.40	178.80	4470.43	3913.33	-3912.41	-84.85	3913.33	181.24	1.62	HS
Projected TD	8199.00	89.60	178.80	4471.12	3992.25	-3991.39	-83.19	3992.26	181.19	0.25	---


LCX Energy

WELL	Big Dog State Unit #202	FIELD	Eddy County, NM Nad 83	STRUCTURE	Big Dog State Unit #202
Magnetic Parameters		Surface Location		Miscellaneous	
Model	IGRF 2005	Date	April 08, 2007	Lat	N32 44 19.900
Dip	60.568°	Mag Dec	+8.626°	Long	W104 42 25.789
				Northing	632732.11 ftUS
				Easting	426400.74 ftUS
				Grid Conv	0.20216020"
				Scale Fact	0.9999242191
				Slot	Big Dog State Unit #202
				Plan	Big Dog State Unit #202
				TVD Ref	RKB (0.00 ft above)
				Survey Date	April 09, 2007

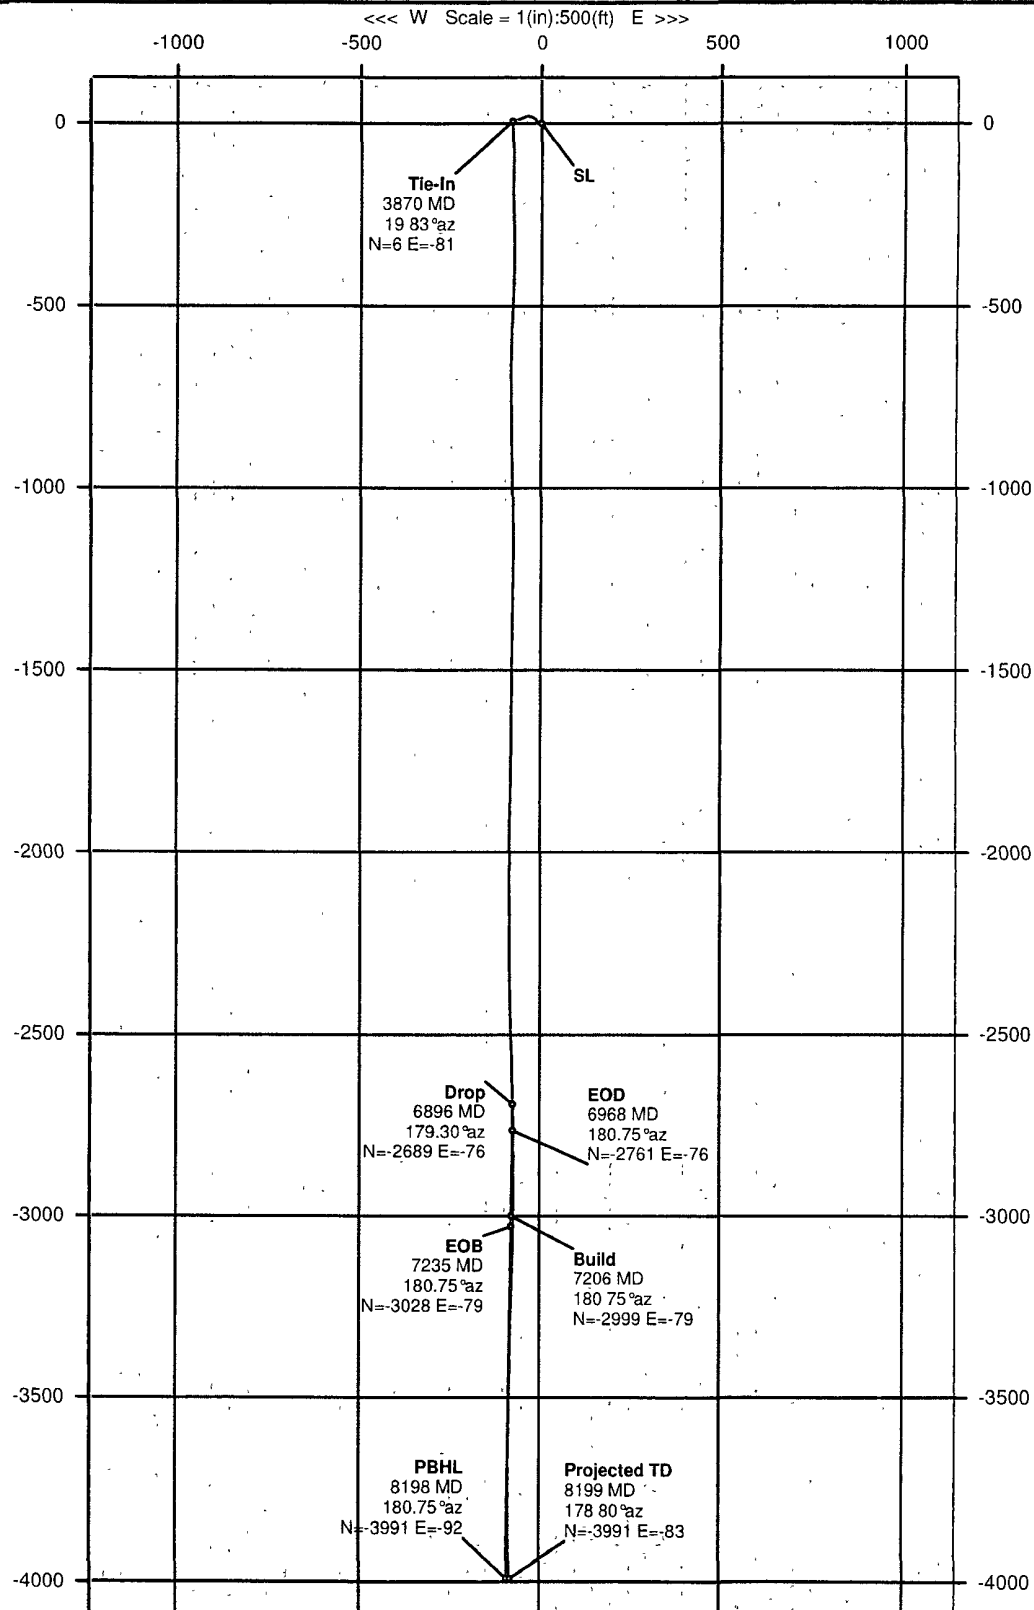

LCX Energy

WELL: Big Dog State Unit #202	FIELD: Eddy County, NM Nad 83	STRUCTURE: Big Dog State Unit #202
Magnetic Parameters Model: ICRF 2005 Dip: 60.568° Map Dec: +8.898° Date: April 08, 2007 PS: 42458.1 ft	Surface Location Lat: N32 44 19.900 Lon: W104 42 25.700 Northing: 632732.11 ftUS Easting: 425400.74 ftUS NAD83 New Mexico State Plane, Eastern Zone US Feet Grid Conv: 0.0025000° Scale Fact: 0.999994191	Miscellaneous Slot: Big Dog State Unit #202 Plan: Big Dog State Unit #202 surveys TVD Ref: Serv. Date PWB (10.00 ft above): April 08, 2007

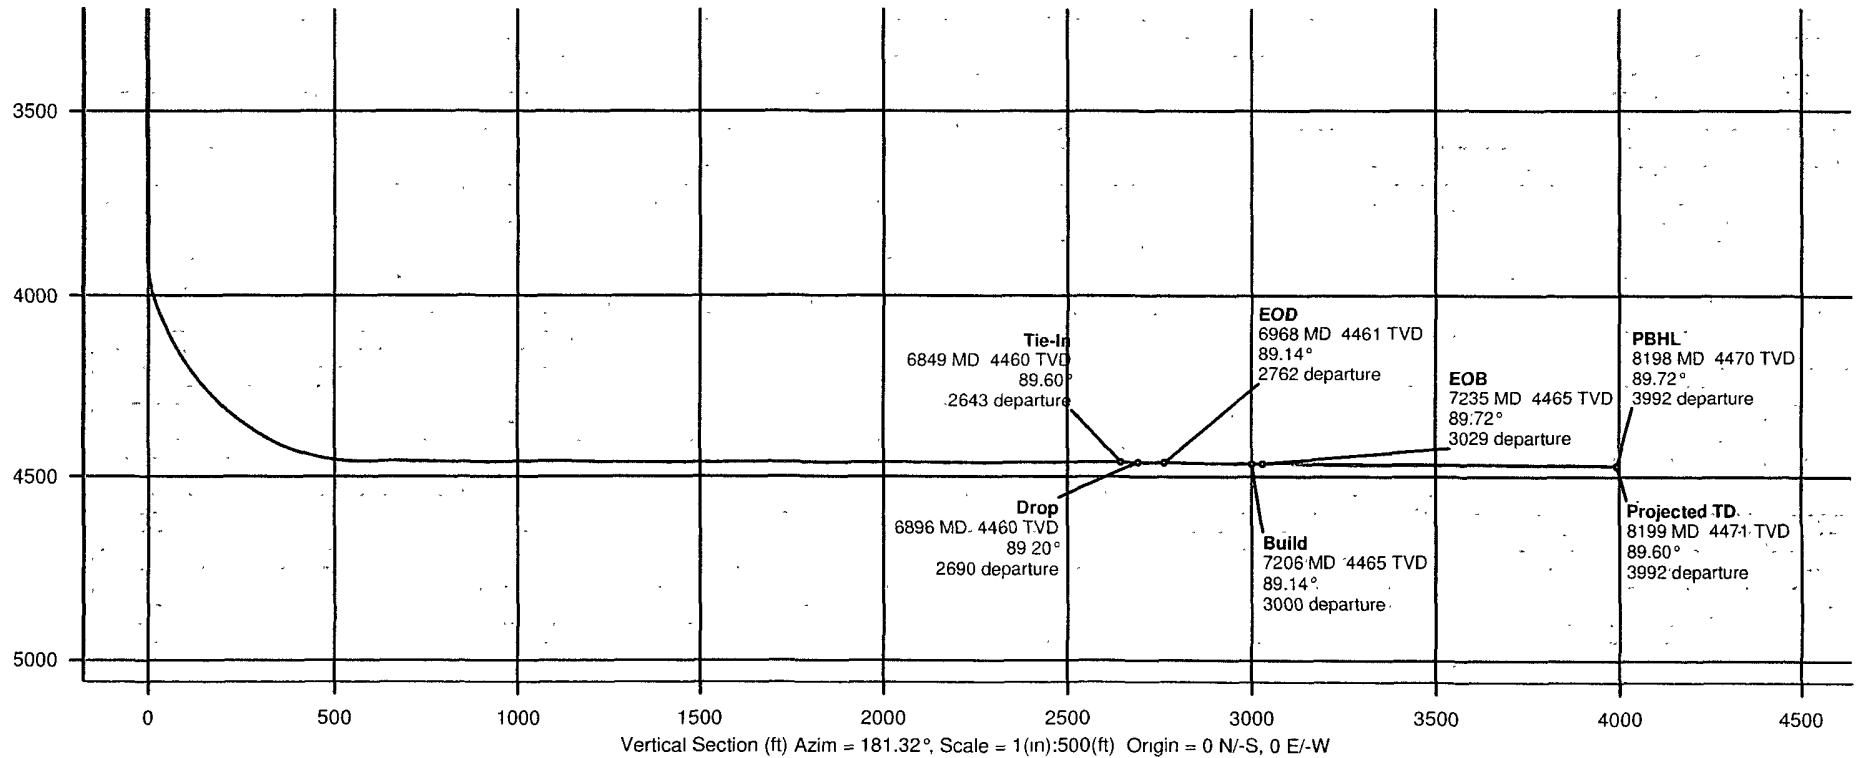

INTREPID
Directional Drilling Specialists



A Gyrodata Directional Survey

Field Copy Only, not definitive

for

LCX

Location: BIG DOG 2, EDDY COUNTY, NEW MEXICO
Lease: BIG DOG STATE UNIT Well: #202, 4-1/2" DRILLPIPE

Job Number: MD0407G_158

Run Date: 4/6/2007 5:16:10 PM

Surveyor: THOMAS BOWDEN
AJ EATON

Calculation Method: MINIMUM CURVATURE

Survey Latitude: 32.739444 deg. N Longitude: 104.708333 deg. W

Azimuth Correction:

Gyro: 0.20000 deg East to Grid North

Vertical Section Calculated from Well Head Location

Closure Calculated from Well Head Location

Horizontal Coordinates Calculated from Well Head Location

A Gyrodata Directional Survey

LCX

Location: BIG DOG 2, EDDY COUNTY, NEW MEXICO

Lease: BIG DOG STATE UNIT Well: #202, 4-1/2" DRILLPIPE

Job Number: MD0407G_158

MEASURED DEPTH feet	INCL deg.	AZIMUTH deg.	VERTICAL SECTION feet	DOGLEG SEVERITY deg./ 100 ft.	VERTICAL DEPTH feet	CLOSURE DIST. feet	AZIMUTH deg.	HORIZONTAL COORDINATES feet	
0.00	0.00	0.00	0.0	0.00	0.00	0.0	0.0	0.00 N	0.00 E

0 TO 3885' RATE GYROSCOPIC DROP MULTISHOT SURVEY RAN INSIDE 4-1/2" DRILLPIPE									
ALL MEASURED DEPTHS AND COORDINATES REFERENCED TO BIG DOG 2 R.K.B.									

b									
200.00	0.71	245.38	-0.5	0.35	199.99	1.2	245.4	0.51 S	1.12 W
400.00	1.02	320.14	0.3	0.54	399.98	3.4	275.7	0.34 N	3.39 W
600.00	1.47	280.87	2.2	0.47	599.93	7.4	287.3	2.19 N	7.05 W
800.00	2.12	317.91	5.4	0.65	799.84	13.2	294.2	5.41 N	12.04 W
1000.00	2.06	315.20	10.7	0.06	999.71	20.1	302.1	10.71 N	17.05 W
1200.00	2.25	295.70	15.0	0.38	1199.57	27.5	302.9	14.96 N	23.13 W
1400.00	2.03	294.12	18.1	0.11	1399.43	35.0	301.2	18.11 N	29.91 W
1600.00	1.96	277.02	20.0	0.30	1599.31	41.6	298.7	19.98 N	36.54 W
1800.00	1.74	253.33	19.5	0.40	1799.21	47.1	294.5	19.53 N	42.85 W
2000.00	1.59	249.80	17.7	0.09	1999.12	51.5	290.1	17.70 N	48.37 W
2200.00	1.60	245.07	15.6	0.07	2199.05	55.7	286.2	15.56 N	53.51 W
2400.00	1.50	245.68	13.3	0.05	2398.97	59.9	282.8	13.31 N	58.43 W
2600.00	1.29	253.34	11.6	0.14	2598.91	64.0	280.4	11.58 N	62.97 W
2800.00	1.31	253.95	10.3	0.01	2798.86	68.1	278.7	10.31 N	67.31 W
2896.60	1.20	249.11	9.6	0.16	2895.44	70.0	277.9	9.64 N	69.31 W
3084.48	1.18	247.58	8.2	0.02	3083.28	73.4	276.4	8.21 N	72.92 W
3272.36	0.90	245.90	6.9	0.15	3271.13	76.4	275.2	6.87 N	76.05 W
3460.24	0.54	262.73	6.2	0.22	3458.99	78.5	274.5	6.16 N	78.26 W
3648.12	0.66	251.35	5.7	0.09	3646.86	80.4	274.1	5.70 N	80.17 W

A Gyrodata Directional Survey

LCX

Location: BIG DOG 2, EDDY COUNTY, NEW MEXICO

Lease: BIG DOG STATE UNIT Well: #202, 4-1/2" DRILLPIPE

Job Number: MD0407G_158

MEASURED DEPTH feet	INCL deg.	AZIMUTH deg.	VERTICAL SECTION feet	DOGLEG SEVERITY deg./ 100 ft.	VERTICAL DEPTH feet	CLOSURE DIST. AZIMUTH feet deg.	HORIZONTAL COORDINATES feet
3836.00	0.12	318.96	5.5	0.33	3834.74	81.5 273.9	5.51 N 81.33 W
3870.00	0.19	19.83	5.6	0.49	3868.74	81.5 273.9	5.59 N 81.34 W

Final Station Closure: Distance: 81.53 ft Az: 273.93 deg.