

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SEP - 4 2008

FORM APPROVED
OMB NO 1004-0135
Expires: November 30, 2000

S

SUNDRY NOTICES AND REPORTS ON WELLS

OCD-ARTESIA

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

OXY USA Inc.

16696

3a. Address

P.O. Box 50250, Midland, TX 79710-0250

3b. Phone No. (include area code)

432-685-5717

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SL - 2250 FSL 330 FEL NESE(I) Sec 10 T25S R29E

BHL - 2310 FSL 660 FWL NWSW(L) Sec 10 T25S R29E

5. Lease Serial No

NM15303

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No

8. Well Name and No.

Corral Draw 10 #1H

9. API Well No.

30-015-36043

10. Field and Pool, or Exploratory Area

Corral Draw Bone Spring

11. County or Parish, State

Eddy NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice

TYPE OF ACTION

☐ Acidize☐ Deepen☐ Production (Start/Resume)☐ Water Shut-Off☐ Alter Casing☐ Fracture Treat☐ Reclamation☐ Well Integrity☐ Casing Repair☐ New Construction☐ Recomplete☐ Other☒ Change Plans☐ Plug and Abandon☐ Temporarily Abandon☐ Convert to Injection☐ Plug Back☐ Water Disposal

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

OXY USA Inc. respectfully requests the following change of plans from the previously approved drilling permit. OXY proposes to drill a 7-7/8" pilothole to 5800' log (DLL/MSFL/DSN/SDL/GRL), plugback (see attached for procedure) and then kickoff horizontal lateral. The well will be drilled with a closed loop system (see attached for rig layout, BOP-5000#WP and C-144 CLEZ).

OXY also requests the following variance to the Pressure Control Equipment that was permitted and approved in the original drilling plan. OXY proposes to connect from the BOP outlet to the choke manifold a flex line that is manufactured by Contitech Rubber Industrial KFT. It is a 3" ID X 35' flexible hose rated to 10000psi working pressure. It has been tested to 15000psi and is built to API. Spec 16C. Once the flex line is installed, it will be tied down with safety clamps, certification attached.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

9/2/08

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Accepted for record - NMOCD

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Corral Draw 10 #1H
Attachment – Proposed Pilotheole Plugback Procedure

Plug 1 from 5800 ft to 5500 ft

200 sks Premium Plus Cement
94 lbm/sk Premium Plus Cement (Cement)

Estimated Slurry Properties:
CompressiveStrengths @ 125 °F

Excess= 100%

Fluid Weight	14.800 lbm/gal
Slurry Yield:	1.326 ft ³ /sk
Total Mixing Fluid:	6.336 Gal/sk
Volume:	47.234 bbl
Proposed Sacks:	200 sks
Thickening Time:	03:10
06:00	500 psi
12:00	880 psi
24:00	1860 psi
48:00	2100 psi

Plug 2 from 5500 ft to 5200 ft

200 sks Premium Plus Cement
94 lbm/sk Premium Plus Cement (Cement)

Estimated Slurry Properties:
CompressiveStrengths @ 125 °F

Excess= 100%

Fluid Weight	14.800 lbm/gal
Slurry Yield:	1.326 ft ³ /sk
Total Mixing Fluid:	6.336 Gal/sk
Volume:	47.234 bbl
Proposed Sacks:	200 sks
Thickening Time:	03:10
06:00	500 psi
12:00	880 psi
24:00	1860 psi
48:00	2100 psi

Plug 3: Set a Kick-off Plug from 5200 ft to 4760 ft

450 sks Premium Cement
94 lbm/sk Premium Cement (Cement)
0.75 % CFR-3 (Dispersant)
0.1 % HR-7 (Retarder)


Estimated Slurry Properties:
CompressiveStrengths @ 125 °F

Excess= 100%

Fluid Weight	17 lbm/gal
Slurry Yield:	1 ft ³ /sk
Total Mixing Fluid:	3.893 Gal/sk
Volume:	80.148 bbl
Proposed Sacks:	450 sks
Thickening Time:	03:00
04:00	500 psi
12:00	2100 psi
24:00	3180 psi



OXY FLEX III PAD (Brandt Closed Loop System)

Level Area-No Caliche-For Offices and Living Quarters

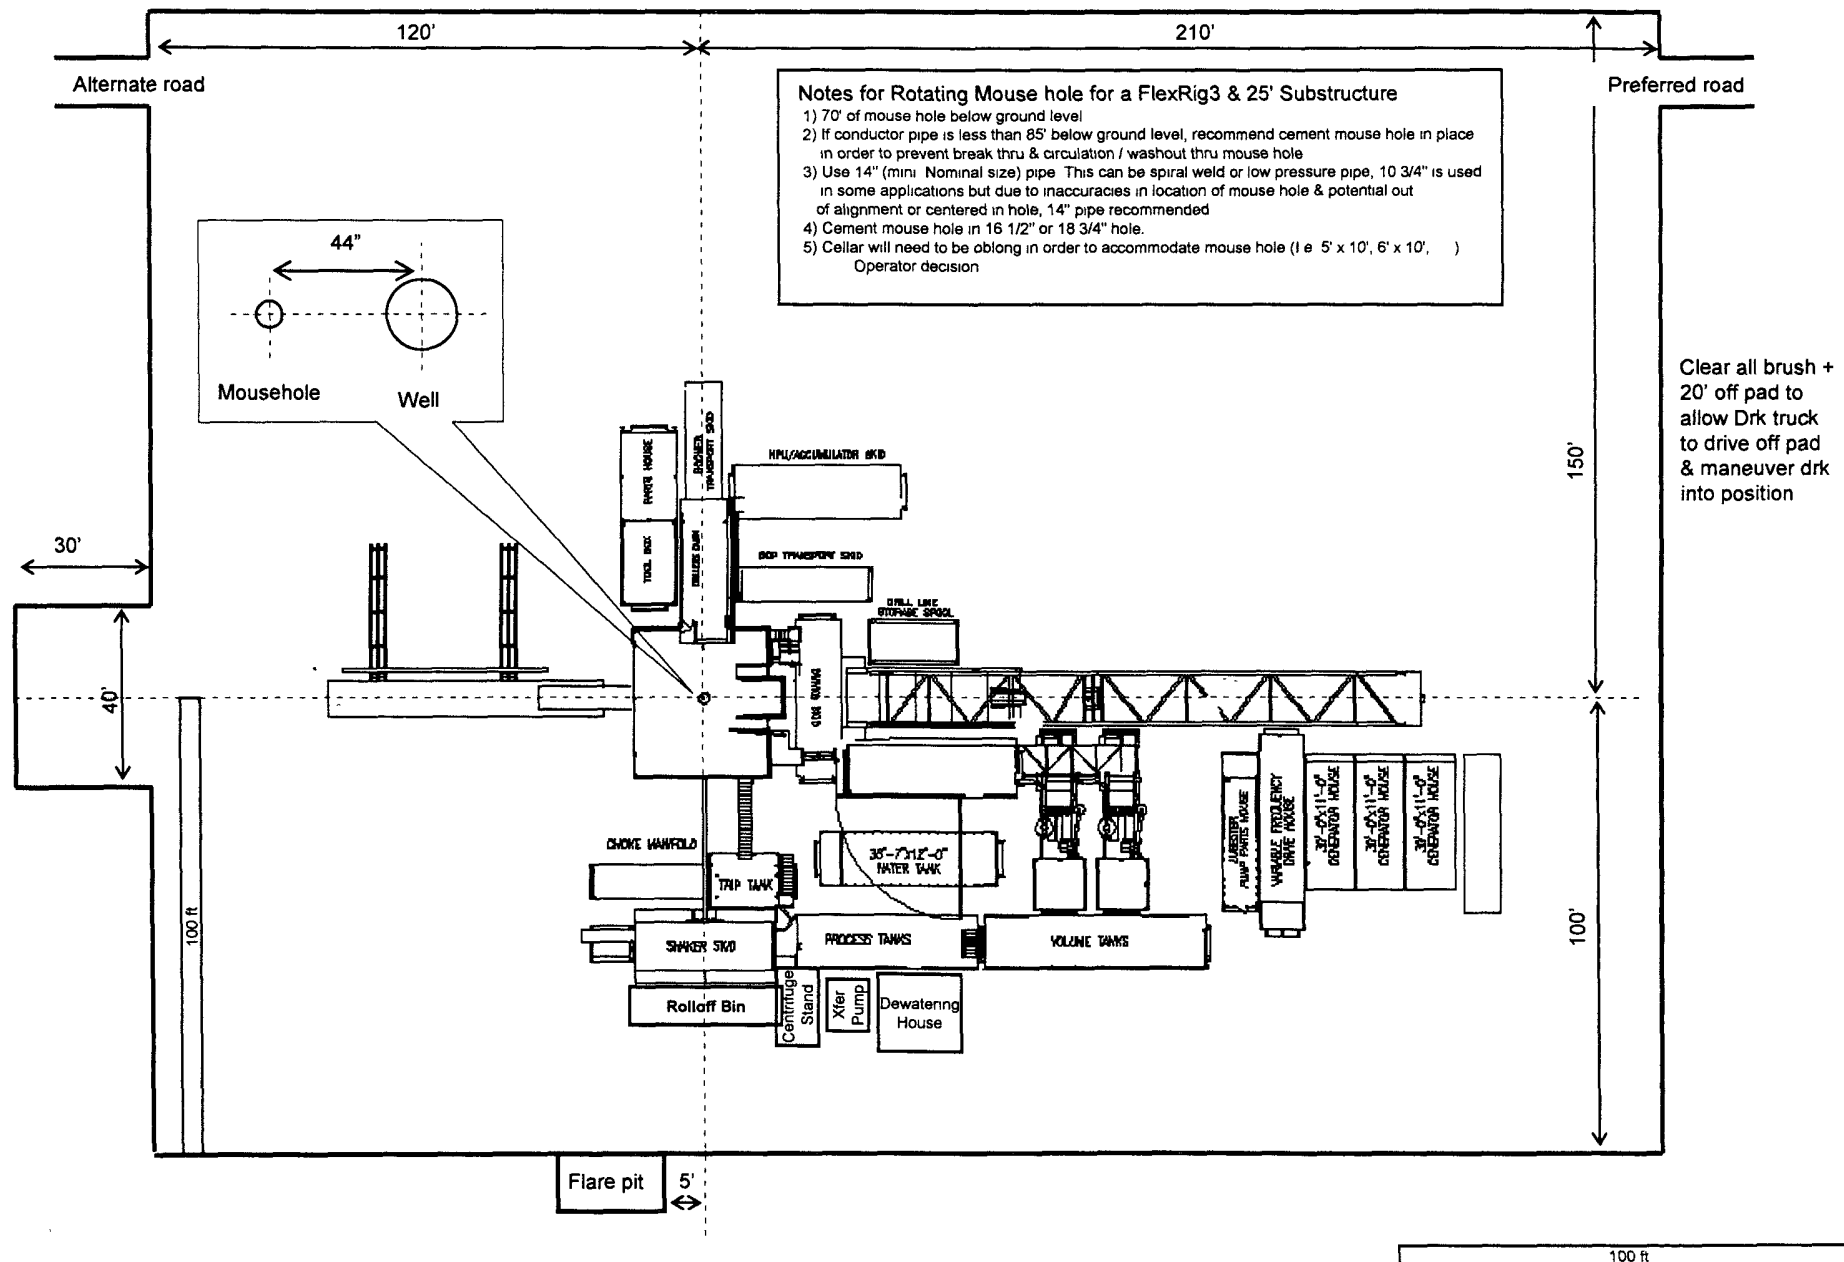



Project: CORRAL DRAW
 Site: CORRAL DRAW 10
 Well: CORRAL DRAW 10# 1H
 Wellbore: ST#1 - Lateral
 Design: Plan #1

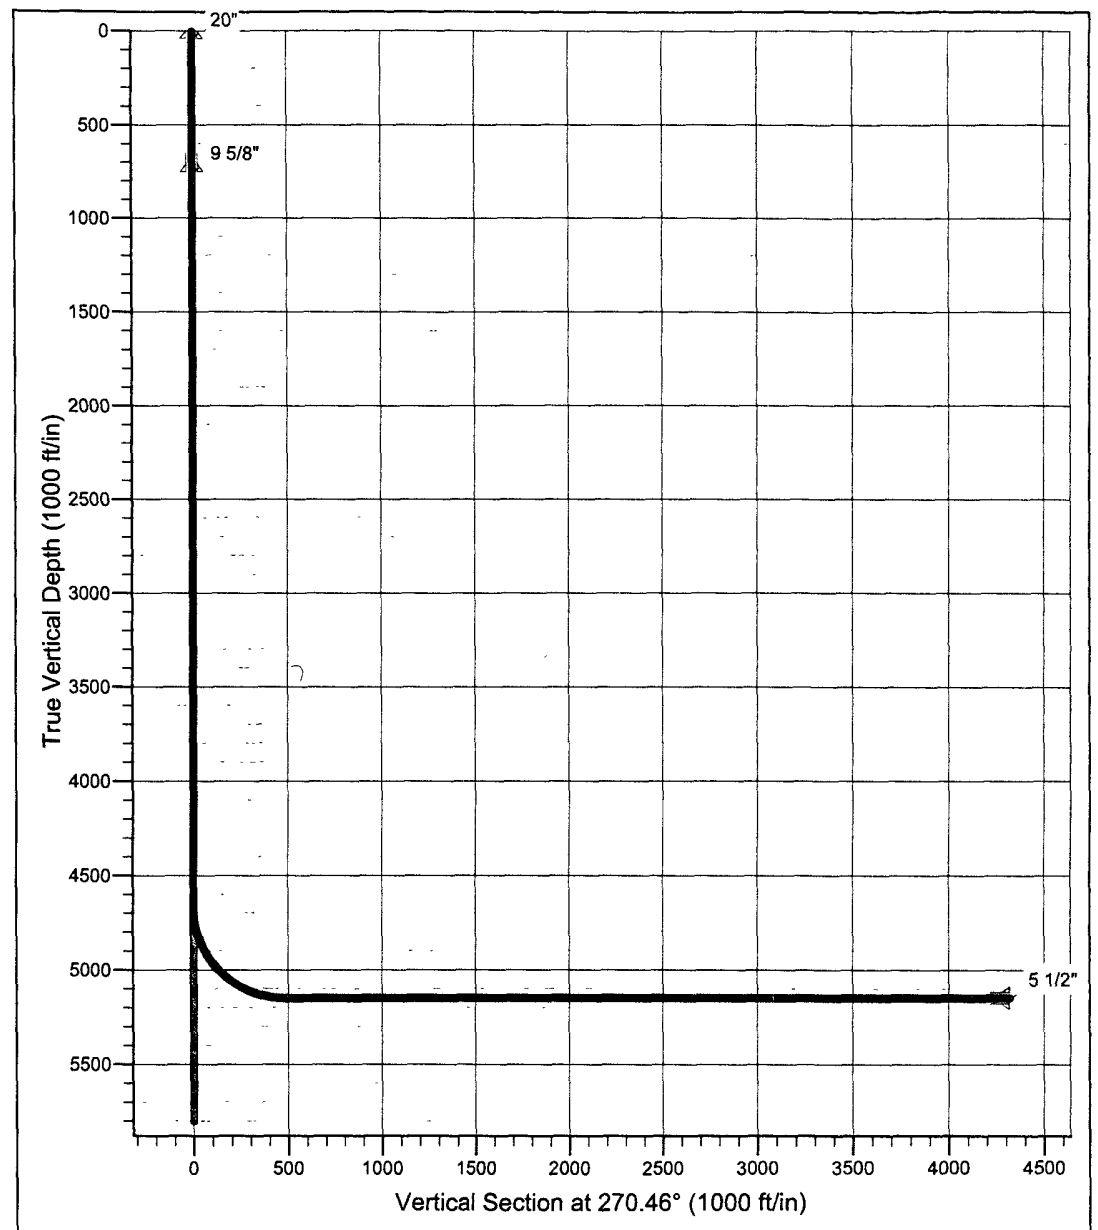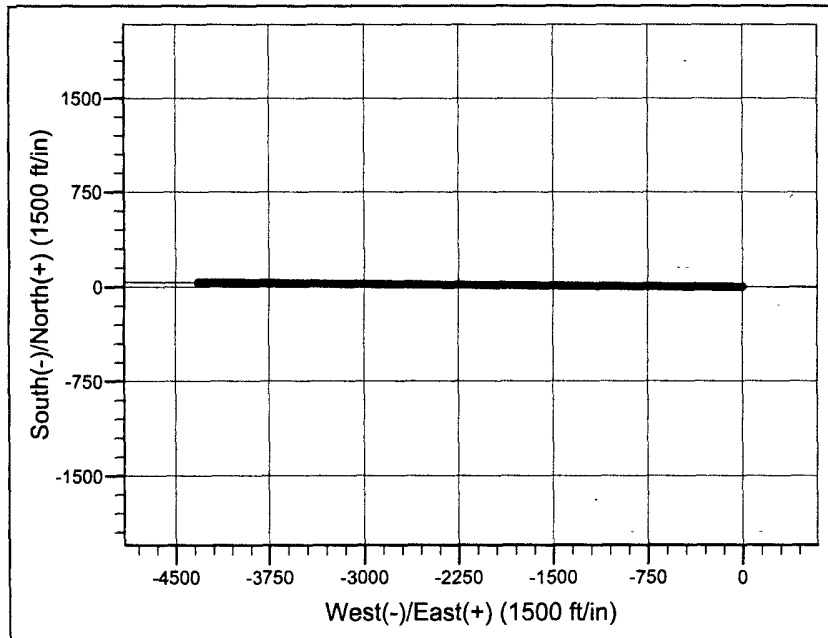


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	4670.0	0.00	0.00	4670.0	0.0	0.0	0.00	0.00	0.0	
2	5420.0	90.00	270.46	5147.5	3.8	-477.4	12.00	270.46	477.5	
3	9260.0	90.00	270.46	5147.5	34.7	-4317.3	0.00	0.00	4317.5	

Corral Draw 10 #1H ST01								
Proposed Directional Plan								
MD (ft)	Inc (°)	Azi (°)	TVD (ft)	N/S (ft)	E/W (ft)	V.Sec. (ft)	DLeg (°/10)	Tool
0	0	0	0	0	0	0	0	UNDEFINED
100	0	0	100	0	0	0	0	INC (1)
200	0	0	200	0	0	0	0	INC (1)
300	0	0	300	0	0	0	0	INC (1)
400	0	0	400	0	0	0	0	INC (1)
500	0	0	500	0	0	0	0	INC (1)
600	0	0	600	0	0	0	0	INC (1)
700	0	0	700	0	0	0	0	INC (1)
800	0	0	800	0	0	0	0	INC (1)
900	0	0	900	0	0	0	0	INC (1)
1000	0	0	1000	0	0	0	0	INC (1)
1100	0	0	1100	0	0	0	0	INC (1)
1200	0	0	1200	0	0	0	0	INC (1)
1300	0	0	1300	0	0	0	0	INC (1)
1400	0	0	1400	0	0	0	0	INC (1)
1500	0	0	1500	0	0	0	0	INC (1)
1600	0	0	1600	0	0	0	0	INC (1)
1700	0	0	1700	0	0	0	0	INC (1)
1800	0	0	1800	0	0	0	0	INC (1)
1900	0	0	1900	0	0	0	0	INC (1)
2000	0	0	2000	0	0	0	0	INC (1)
2100	0	0	2100	0	0	0	0	INC (1)
2200	0	0	2200	0	0	0	0	INC (1)
2300	0	0	2300	0	0	0	0	INC (1)
2400	0	0	2400	0	0	0	0	INC (1)
2500	0	0	2500	0	0	0	0	INC (1)
2600	0	0	2600	0	0	0	0	INC (1)
2700	0	0	2700	0	0	0	0	INC (1)
2800	0	0	2800	0	0	0	0	INC (1)
2900	0	0	2900	0	0	0	0	INC (1)
3000	0	0	3000	0	0	0	0	INC (1)
3100	0	0	3100	0	0	0	0	INC (1)
3200	0	0	3200	0	0	0	0	INC (1)
3300	0	0	3300	0	0	0	0	INC (1)
3400	0	0	3400	0	0	0	0	INC (1)
3500	0	0	3500	0	0	0	0	INC (1)
3600	0	0	3600	0	0	0	0	INC (1)
3700	0	0	3700	0	0	0	0	INC (1)
3800	0	0	3800	0	0	0	0	INC (1)
3900	0	0	3900	0	0	0	0	INC (1)
4000	0	0	4000	0	0	0	0	INC (1)
4100	0	0	4100	0	0	0	0	INC (1)
4200	0	0	4200	0	0	0	0	INC (1)
4300	0	0	4300	0	0	0	0	INC (1)
4400	0	0	4400	0	0	0	0	INC (1)
4500	0	0	4500	0	0	0	0	INC (1)
4600	0	0	4600	0	0	0	0	INC (1)
4670	0	0	4670	0	0	0	0	INC (1)
4675	0.6	270.46	4675	0	0	0	12	MWD (2)
4700	3.6	270.46	4700	0	-0.9	0.9	12	MWD (2)
4725	6.6	270.46	4724.9	0	-3.2	3.2	12	MWD (2)
4750	9.6	270.46	4749.6	0.1	-6.7	6.7	12	MWD (2)
4775	12.6	270.46	4774.2	0.1	-11.5	11.5	12	MWD (2)
4800	15.6	270.46	4798.4	0.1	-17.6	17.6	12	MWD (2)
4825	18.6	270.46	4822.3	0.2	-24.9	24.9	12	MWD (2)
4850	21.6	270.46	4845.8	0.3	-33.5	33.5	12	MWD (2)
4875	24.6	270.46	4868.8	0.3	-43.3	43.3	12	MWD (2)
4900	27.6	270.46	4891.2	0.4	-54.3	54.3	12	MWD (2)


MD (ft)	Inc (°)	Azi (°)	TVD (ft)	N/S (ft)	E/W (ft)	V.Sec. (ft)	DLeg (°/10)	Tool
4925	30.6	270.46	4913	0.5	-66.5	66.5	12	MWD (2)
4950	33.6	270.46	4934.2	0.6	-79.8	79.8	12	MWD (2)
4975	36.6	270.46	4954.7	0.8	-94.1	94.1	12	MWD (2)
5000	39.6	270.46	4974.3	0.9	-109.6	109.6	12	MWD (2)
5025	42.6	270.46	4993.2	1	-126	126	12	MWD (2)
5050	45.6	270.46	5011.1	1.2	-143.4	143.4	12	MWD (2)
5075	48.6	270.46	5028.2	1.3	-161.7	161.7	12	MWD (2)
5100	51.6	270.46	5044.2	1.5	-180.9	180.9	12	MWD (2)
5125	54.6	270.46	5059.2	1.6	-200.9	200.9	12	MWD (2)
5150	57.6	270.46	5073.1	1.8	-221.6	221.6	12	MWD (2)
5175	60.6	270.46	5086	2	-243.1	243.1	12	MWD (2)
5200	63.6	270.46	5097.7	2.1	-265.2	265.2	12	MWD (2)
5225	66.6	270.46	5108.2	2.3	-287.8	287.8	12	MWD (2)
5250	69.6	270.46	5117.5	2.5	-311	311	12	MWD (2)
5275	72.6	270.46	5125.6	2.7	-334.7	334.7	12	MWD (2)
5300	75.6	270.46	5132.5	2.9	-358.7	358.7	12	MWD (2)
5325	78.6	270.46	5138	3.1	-383.1	383.1	12	MWD (2)
5350	81.6	270.46	5142.3	3.3	-407.7	407.7	12	MWD (2)
5375	84.6	270.46	5145.3	3.5	-432.5	432.5	12	MWD (2)
5400	87.6	270.46	5147	3.7	-457.5	457.5	12	MWD (2)
5420	90	270.46	5147.5	3.8	-477.4	477.5	12	MWD (2)
5500	90	270.46	5147.5	4.5	-557.4	557.5	0	MWD (2)
5600	90	270.46	5147.5	5.3	-657.4	657.5	0	MWD (2)
5700	90	270.46	5147.5	6.1	-757.4	757.5	0	MWD (2)
5800	90	270.46	5147.5	6.9	-857.4	857.5	0	MWD (2)
5900	90	270.46	5147.5	7.7	-957.4	957.5	0	MWD (2)
6000	90	270.46	5147.5	8.5	-1057.4	1057.5	0	MWD (2)
6100	90	270.46	5147.5	9.3	-1157.4	1157.5	0	MWD (2)
6200	90	270.46	5147.5	10.1	-1257.4	1257.5	0	MWD (2)
6300	90	270.46	5147.5	10.9	-1357.4	1357.5	0	MWD (2)
6400	90	270.46	5147.5	11.7	-1457.4	1457.5	0	MWD (2)
6500	90	270.46	5147.5	12.5	-1557.4	1557.5	0	MWD (2)
6600	90	270.46	5147.5	13.3	-1657.4	1657.5	0	MWD (2)
6700	90	270.46	5147.5	14.1	-1757.4	1757.5	0	MWD (2)
6800	90	270.46	5147.5	14.9	-1857.4	1857.5	0	MWD (2)
6900	90	270.46	5147.5	15.7	-1957.4	1957.5	0	MWD (2)
7000	90	270.46	5147.5	16.5	-2057.4	2057.5	0	MWD (2)
7100	90	270.46	5147.5	17.3	-2157.4	2157.5	0	MWD (2)
7200	90	270.46	5147.5	18.1	-2257.4	2257.5	0	MWD (2)
7300	90	270.46	5147.5	18.9	-2357.4	2357.5	0	MWD (2)
7400	90	270.46	5147.5	19.7	-2457.4	2457.5	0	MWD (2)
7500	90	270.46	5147.5	20.5	-2557.4	2557.5	0	MWD (2)
7600	90	270.46	5147.5	21.3	-2657.4	2657.5	0	MWD (2)
7700	90	270.46	5147.5	22.1	-2757.4	2757.5	0	MWD (2)
7800	90	270.46	5147.5	22.9	-2857.4	2857.5	0	MWD (2)
7900	90	270.46	5147.5	23.7	-2957.4	2957.5	0	MWD (2)
8000	90	270.46	5147.5	24.5	-3057.4	3057.5	0	MWD (2)
8100	90	270.46	5147.5	25.3	-3157.4	3157.5	0	MWD (2)
8200	90	270.46	5147.5	26.2	-3257.4	3257.5	0	MWD (2)
8300	90	270.46	5147.5	27	-3357.4	3357.5	0	MWD (2)
8400	90	270.46	5147.5	27.8	-3457.4	3457.5	0	MWD (2)
8500	90	270.46	5147.5	28.6	-3557.4	3557.5	0	MWD (2)
8600	90	270.46	5147.5	29.4	-3657.3	3657.5	0	MWD (2)
8700	90	270.46	5147.5	30.2	-3757.3	3757.5	0	MWD (2)
8800	90	270.46	5147.5	31	-3857.3	3857.5	0	MWD (2)
8900	90	270.46	5147.5	31.8	-3957.3	3957.5	0	MWD (2)
9000	90	270.46	5147.5	32.6	-4057.3	4057.5	0	MWD (2)
9100	90	270.46	5147.5	33.4	-4157.3	4157.5	0	MWD (2)
9200	90	270.46	5147.5	34.2	-4257.3	4257.5	0	MWD (2)
9260	90	270.46	5147.5	34.7	-4317.3	4317.5	0	MWD (2)

EXHIBIT #1

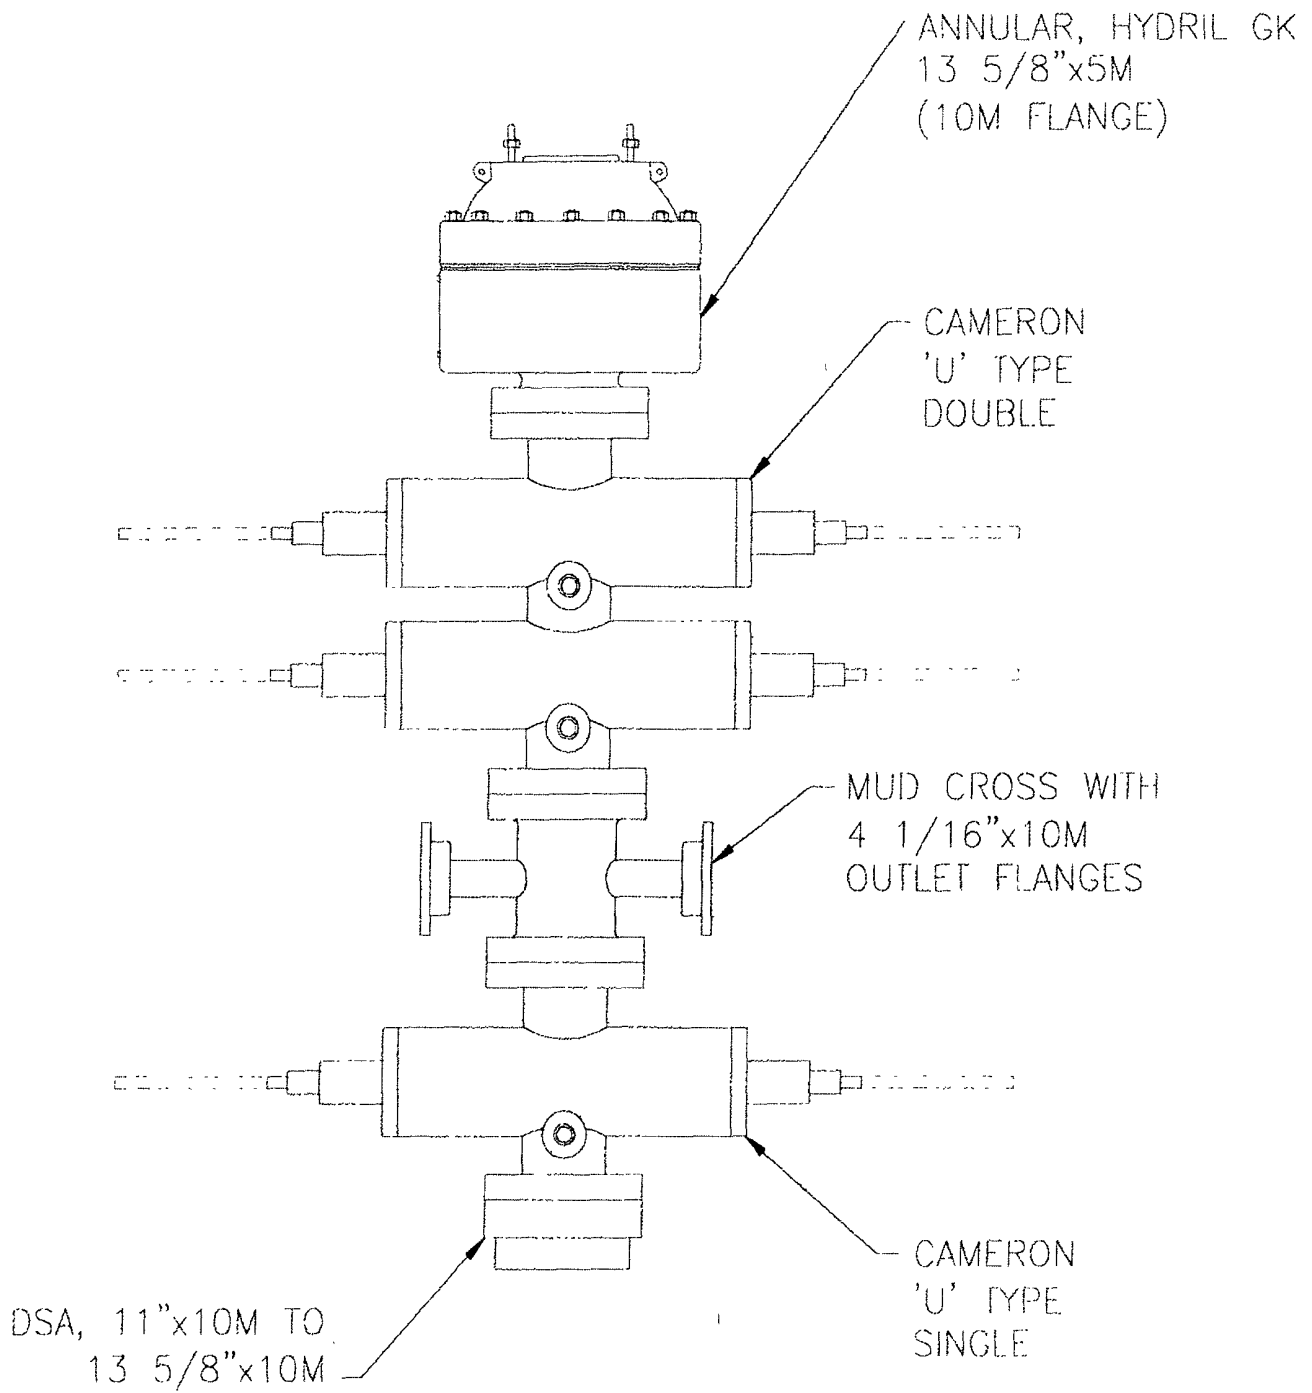

BOP STACK

EXHIBIT #1

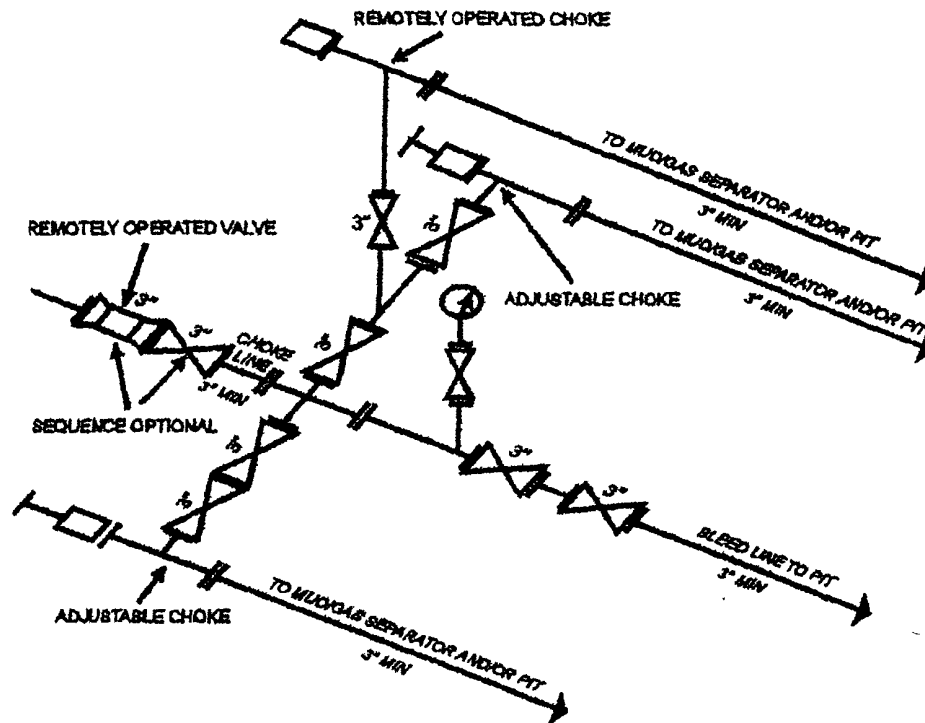

10M AND 15M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY
 [53 FR 49661, Dec. 9, 1988 and 54 FR 39528, Sept. 27, 1989]

Attachment I - 3

CERTIFICATE OF CONFORMITY


Supplier : CONTITECH RUBBER INDUSTRIAL KFT.
Equipment : 6 pcs. Choke and Kill Hose with installed couplings
Type : 3" x 10,67 m WP: 10000 psi
Supplier File Number : 412638
Date of Shipment : April. 2008
Customer : Phoenix Beattie Co.
Customer P.o. : 002491
Referenced Standards
/ Codes / Specifications : API Spec 16 C
Serial No.: 52754,52755,52776,52777,52778,52782

STATEMENT OF CONFORMITY

We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.

COUNTRY OF ORIGIN HUNGARY/EU

Signed :



Position: Q.C. Manager

Contitech Rubber
Industrial Kft.
Quality Control Dept.
(3)

Date: 04. April. 2008



Material Identification Certificate


PA No	006330	Client	HELMERICH & PAYNE INT'L DRILLING CO	Client Ref	370-369-001	Page	1
-------	--------	--------	-------------------------------------	------------	-------------	------	---

[illegible]

We hereby certify that these goods have been inspected by our Quality Management System, and to the best of our knowledge are found to conform to relevant industry standards within the requirements of the purchase order as issued to Phoenix Beattie Corporation.

03/23/08.

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 746	
PURCHASER: Phoenix Beattie Co.				P.O. N°: 002481	
CONTITECH ORDER N°: 412638		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 52777		NOMINAL / ACTUAL LENGTH: 10,67 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 ~ min.	
Pressure test with water at ambient temperature See attachment. (1 page) ↑ 10 mm = 10 Min. → 10 mm = 25 MPa					
COUPLINGS					
Type	Serial N°		Quality	Heat N°	
3" coupling with 4 1/16" Flange end	917 913		AISI 4130	T7998A	
			AISI 4130	26984	
INFOCHIP INSTALLED				API Spec 16 C Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
Date:	Inspector		Quality Control		
04. April. 2008					

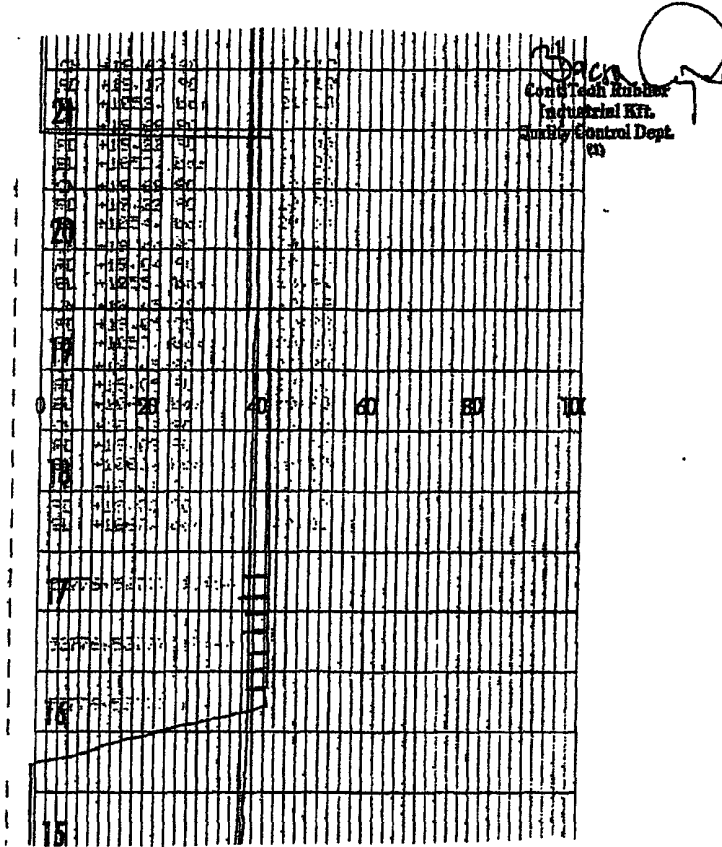



Form No 100/12

Phoenix Beattie Corp

11536 Brittonmoore Park Drive
Houston, TX 77041
Tel: (832) 327-0141
Fax: (832) 327-0146
E-mail: mail@phoenixbeattie.com
www.phoenixbeattie.com

Delivery Note

Customer Order Number	370-369-001	Delivery Note Number	003078	Page	1
Customer / Invoice Address HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER TULSA, OK 74119		Delivery / Address HELMERICH & PAYNE IDC ATTN: JOE STEPHENSON - RIG 370 13609 INDUSTRIAL ROAD HOUSTON, TX 77015			

Customer Acc No	Phoenix Beattie Contract Manager	Phoenix Beattie Reference	Date
H01	JJL	006330	05/23/2008

Item No	Beattie Part Number / Description	Qty Ordered	Qty Sent	Qty To Follow
1	HP10CK3A-35-4F1 3" 10K 16C C&K HOSE x 35ft OAL CW 4.1/16" API SPEC FLANGE E/ End 1: 4.1/16" 10Kpsi API Spec 6A Type 6BX Flange End 2: 4.1/16" 10Kpsi API Spec 6A Type 6BX Flange c/w BX155 Standard ring groove at each end Suitable for H2S Service Working pressure: 10,000psi Test pressure: 15,000psi Standard: API 16C Full specification Armor Guarding: Included Fire Rating: Not Included Temperature rating: -20 Deg C to +100 Deg C	1	1	0
2	SECK3-HPF3 LIFTING & SAFETY EQUIPMENT TO SUIT HP10CK3-35-F1 2 x 160mm ID Safety Clamps 2 x 244mm ID Lifting Collars & element C's 2 x 7ft Stainless Steel wire rope 3/4" OD 4 x 7.75t Shackles	1	1	0
3	SC725-200CS SAFETY CLAMP 200MM 7.25T C/S GALVANISED	1	1	0

Continued...

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days.
Returns may be subject to a handling charge.



Form No 100/12

Phoenix Beattie Corp


11535 Britton Park Drive
Houston, TX 77041
Tel: (832) 327-0141
Fax: (832) 327-0140
E-mail: sales@phoenixbeattie.com
www.phoenixbeattie.com

Delivery Note

Customer Order Number	370-369-001	Delivery Note Number	003078	Page	2
Customer / Invoice Address HELMERICH & PAYNE INT'L DRILLING CO 1437 SOUTH BOULDER TULSA, OK 74119		Delivery / Address HELMERICH & PAYNE IDC ATTN: JOE STEPHENSON - RIG 370 13609 INDUSTRIAL ROAD HOUSTON, TX 77015			

Customer Acc No	Phoenix Beattie Contract Manager	Phoenix Beattie Reference	Date
H01	JJL	006330	05/23/2008

Item No	Beattie Part Number / Description	Qty Ordered	Qty Sent	Qty To Follow
4	SC725-132CS SAFETY CLAMP 132MM 7.25T C/S GALVANIZED C/W BOLTS	1	1	0
5	00CERT-HYDRO HYDROSTATIC PRESSURE TEST CERTIFICATE	1	1	0
6	00CERT-LOAD LOAD TEST CERTIFICATES	1	1	0
7	00FREIGHT INBOUND / OUTBOUND FREIGHT PRE-PAY & ADD TO FINAL INVOICE NOTE: MATERIAL MUST BE ACCOMPANIED BY PAPERWORK INCLUDING THE PURCHASE ORDER, RIG NUMBER TO ENSURE PROPER PAYMENT	1	1	0

Phoenix Beattie Inspection Signature : 

Received in Good Condition : Signature

Print Name

Date

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days.
Returns may be subject to a handling charge.