

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.  
30-005-63053  
5. Indicate Type of Lease  
STATE ☒ FEE ☐  
6. State Oil & Gas Lease No.  
V-2982

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

7. Lease Name or Unit Agreement Name

Quincy AMQ State

8. Well Number  
#10

2. Name of Operator  
Hanson Operating Company, Inc.

SEP 26 2008

9. OGRID Number  
009974

3. Address of Operator  
P. O. Box 1515, Roswell, NM 88202-1515

OCD-ARTESIA

10. Pool name or Wildcat  
Acme San Andres Southeast

4. Well Location

Unit Letter K : 2310 feet from the South line and 1650 feet from the West line  
Section 12 Township 8 South Range 27 East NMPM Chaves County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3943' GR

Pit or Below-grade Tank Application ☒ or Closure ☐

Pit type Workover Depth to Groundwater >100' Distance from nearest fresh water well >2 miles Distance from nearest surface water >10 miles

Pit Liner Thickness: 12 mil Below-Grade Tank: Volume \_\_\_\_\_ bbls; Construction Material \_\_\_\_\_

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Purpose to plug and abandon well as follows:

1. Set CIBP at 2050' with 35' cement cap.
2. Circulate hole with 10# brine with 12.5# per barrel salt water gel.
3. Perforate 4 squeeze holes at 460'.
4. Pump 100 sacks cement for solid plug from 460' to surface.
5. Clean and remediate location.
6. Set Dry Hole Marker.

Notify OCD 24 hrs. prior  
to any work done.

Approval Granted providing work  
is complete by 1/1/09

\* Approval for P/A only  
Workover PIT Requires Submission of C-144

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Carol J. Smith TITLE Production Analyst  
Type or print name Carol J. Smith E-mail address: hanson@dfn.com

DATE 09/22/2008  
Telephone No. 505-622-7330

For State Use Only

APPROVED BY: [Signature] TITLE Asst Rep.  
Conditions of Approval (if any):

DATE 10/1/08

# WELLBORE DIAGRAM

WELL NAME	Quincy AMQ State #10	FIELD	Acme San Andres SE
LOCATION	2310' FSL & 1650' FWL, Section 12-8S-27E, Chaves County, NM		
GL	3943'	ZERO	KB
SPUD DATE	4/24/1995	COMPLETION DATE	5/5/1995
COMMENTS:	API #30-005-63053		

17 1/2" Hole

12 1/4" Hole

7 7/8" Hole

PBTD at 2212'

TD 2225'

13 3/8" at 5' Circulated

## CASING PROGRAM

13 3/8"		5'
8 5/8"	24#	459'
5 1/2"	15.5#	2225'

8 5/8" at 459' with 250 sacks cement circulated

BEFORE

San Andres

Perfs: 2148'-2200' 88 holes


5 1/2" at 2225' with 300 sacks cement

Not to Scale

9/22/2008

# WELLBORE DIAGRAM

WELL NAME	Quincy AMQ State #10	FIELD	Acme San Andres SE
LOCATION	2310' FSL & 1650' FWL, Section 12-8S-27E, Chaves County, NM		
GL	3943'	ZERO	KB
SPUD DATE	4/24/1995	COMPLETION DATE	5/5/1995
COMMENTS:	API #30-005-63053		

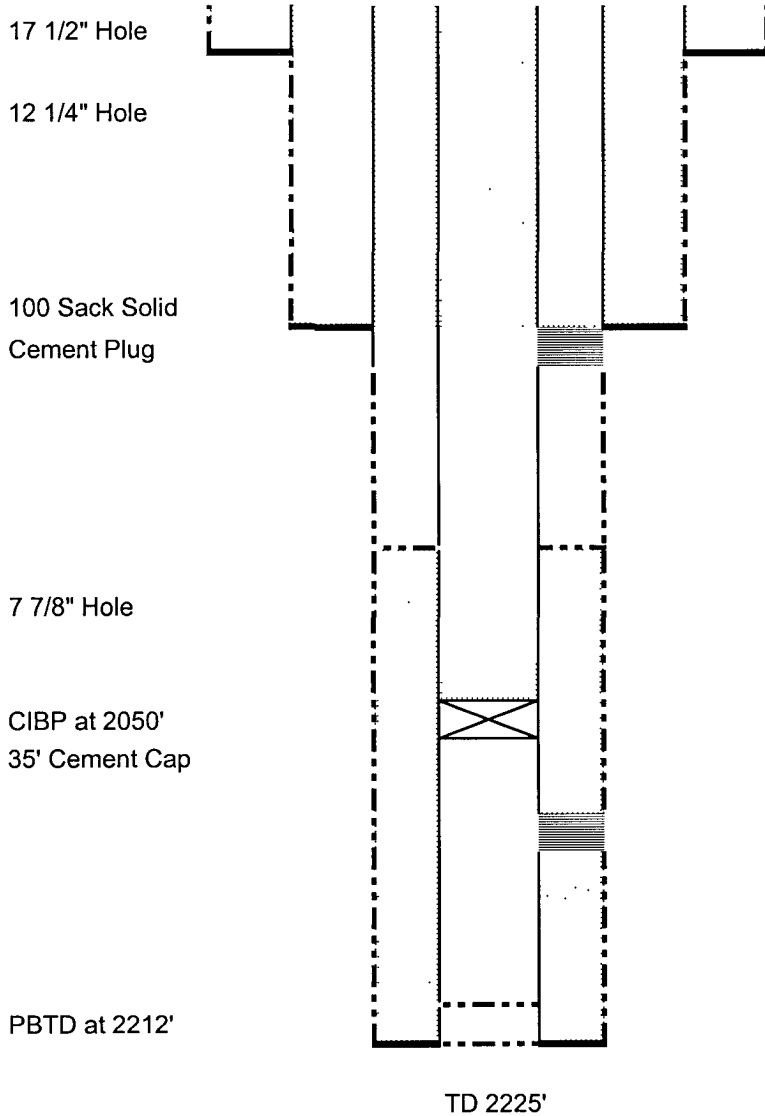

13 3/8" at 5' Circulated

## CASING PROGRAM

13 3/8"		5'
8 5/8"	24#	459'
5 1/2"	15.5#	2225'

8 5/8" at 459' with 250 sacks cement circulated  
Perforate at 460' 4 holes

## AFTER

### San Andres

Perfs: 2148'-2200' 88 holes

5 1/2" at 2225' with 300 sacks cement

Not to Scale  
9/22/2008