

S

OCD-ARTESIA

OCT 28 2008

ATS-08-464
EA-08-709Form 3160-3
(April 2004)

OCD-ARTESIA

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NM-0556811	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Cimarex Energy Co. of Colorado		7. If Unit or CA Agreement, Name and No.	
3a. Address PO Box 140907; Irving, TX 75014		8. Lease Name and Well No. Nitro 11 Federal No. 3 35578	
3b. Phone No (include area code) 972-401-3111		9. API Well No. 30-015- 36745	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At Surface 1980' FSL & 330' FEL At proposed prod. Zone 1980' FSL & 330' FWL Horizontal Abo Test		10. Field and Pool, or Exploratory Abo Countyline Tank 97197	
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk and Survey or Area 11-16S-29E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig unit line if any) 330'		12. County or Parish Eddy	
16. No of acres in lease 1480		13. State NM	
17. Spacing Unit dedicated to this well N2S2 160			
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft N/A		19. Proposed Depth Pilot Hole 7550' MD 11778' TVD 7310'	
20. BLM/BIA Bond No. on File NM-2575			
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3,737' GR		22. Approximate date work will start* 5/1/2008	
23. Estimated duration 30-35 days			
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form.

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2. A Drilling Plan | 5. Operator Certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature <i>Zeno Farris</i>	Name (Printed/Typed) Zeno Farris	Date 03.20.08
Title Manager Operations Administration		
Approved By (Signature) <i>/s/ Don Peterson</i>	Name (Printed/Typed) <i>/s/ Don Peterson</i>	Date OCT 28 2008
Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.S. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction

APPROVAL FOR TWO YEARS

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

Roswell Controlled Water Basin

Approval Subject to General Requirements
& Special Stipulations Attached

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II
1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised October 12, 2005

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-36745	Pool Code 97197	County San Juan	Pool Name Abo
Property Code 35578	Property Name NITRO "11" FEDERAL		Well Number 3
GRID No. 162683	Operator Name CIMAREX ENERGY CO. OF COLORADO		Elevation 3737'

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	11	16 S	29 E		1980	SOUTH	330	EAST	EDDY

Bottom Hole Location If Different From Surface


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	11	16 S	29 E		1980	SOUTH	330	WEST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

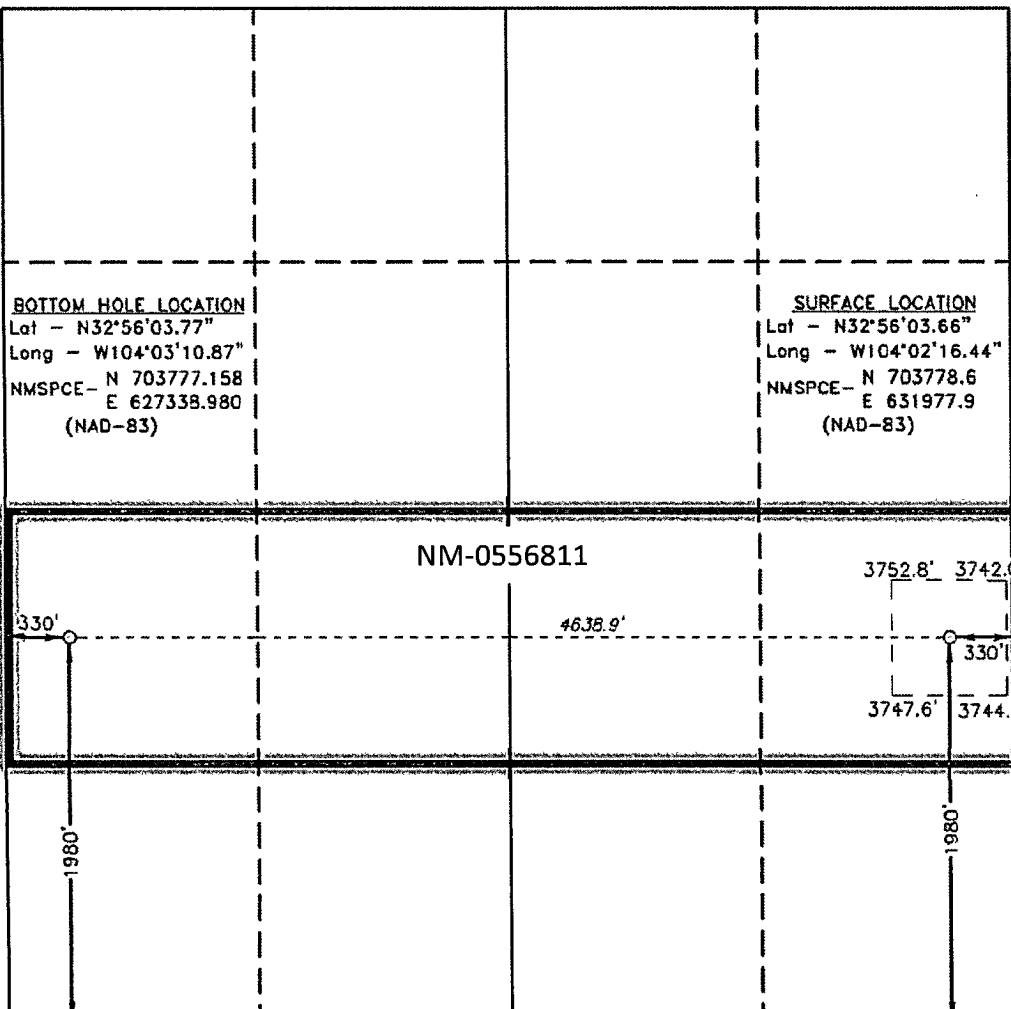BOTTOM HOLE LOCATION Lat - N32°56'03.77" Long - W104°03'10.87" NMSPCE - N 703777.158 E 627338.980 (NAD-83)		SURFACE LOCATION Lat - N32°56'03.66" Long - W104°02'16.44" NMSPCE - N 703778.6 E 631977.9 (NAD-83)	
			
OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Zeno Farris 03-20-08 Signature Date Zeno Farris Printed Name			
SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JANUARY 31, 2008 Date Surveyed GARY L. JONES Signature Professional Surveyor Certificate No. Gary L. Jones 7977			


Basin Surveys

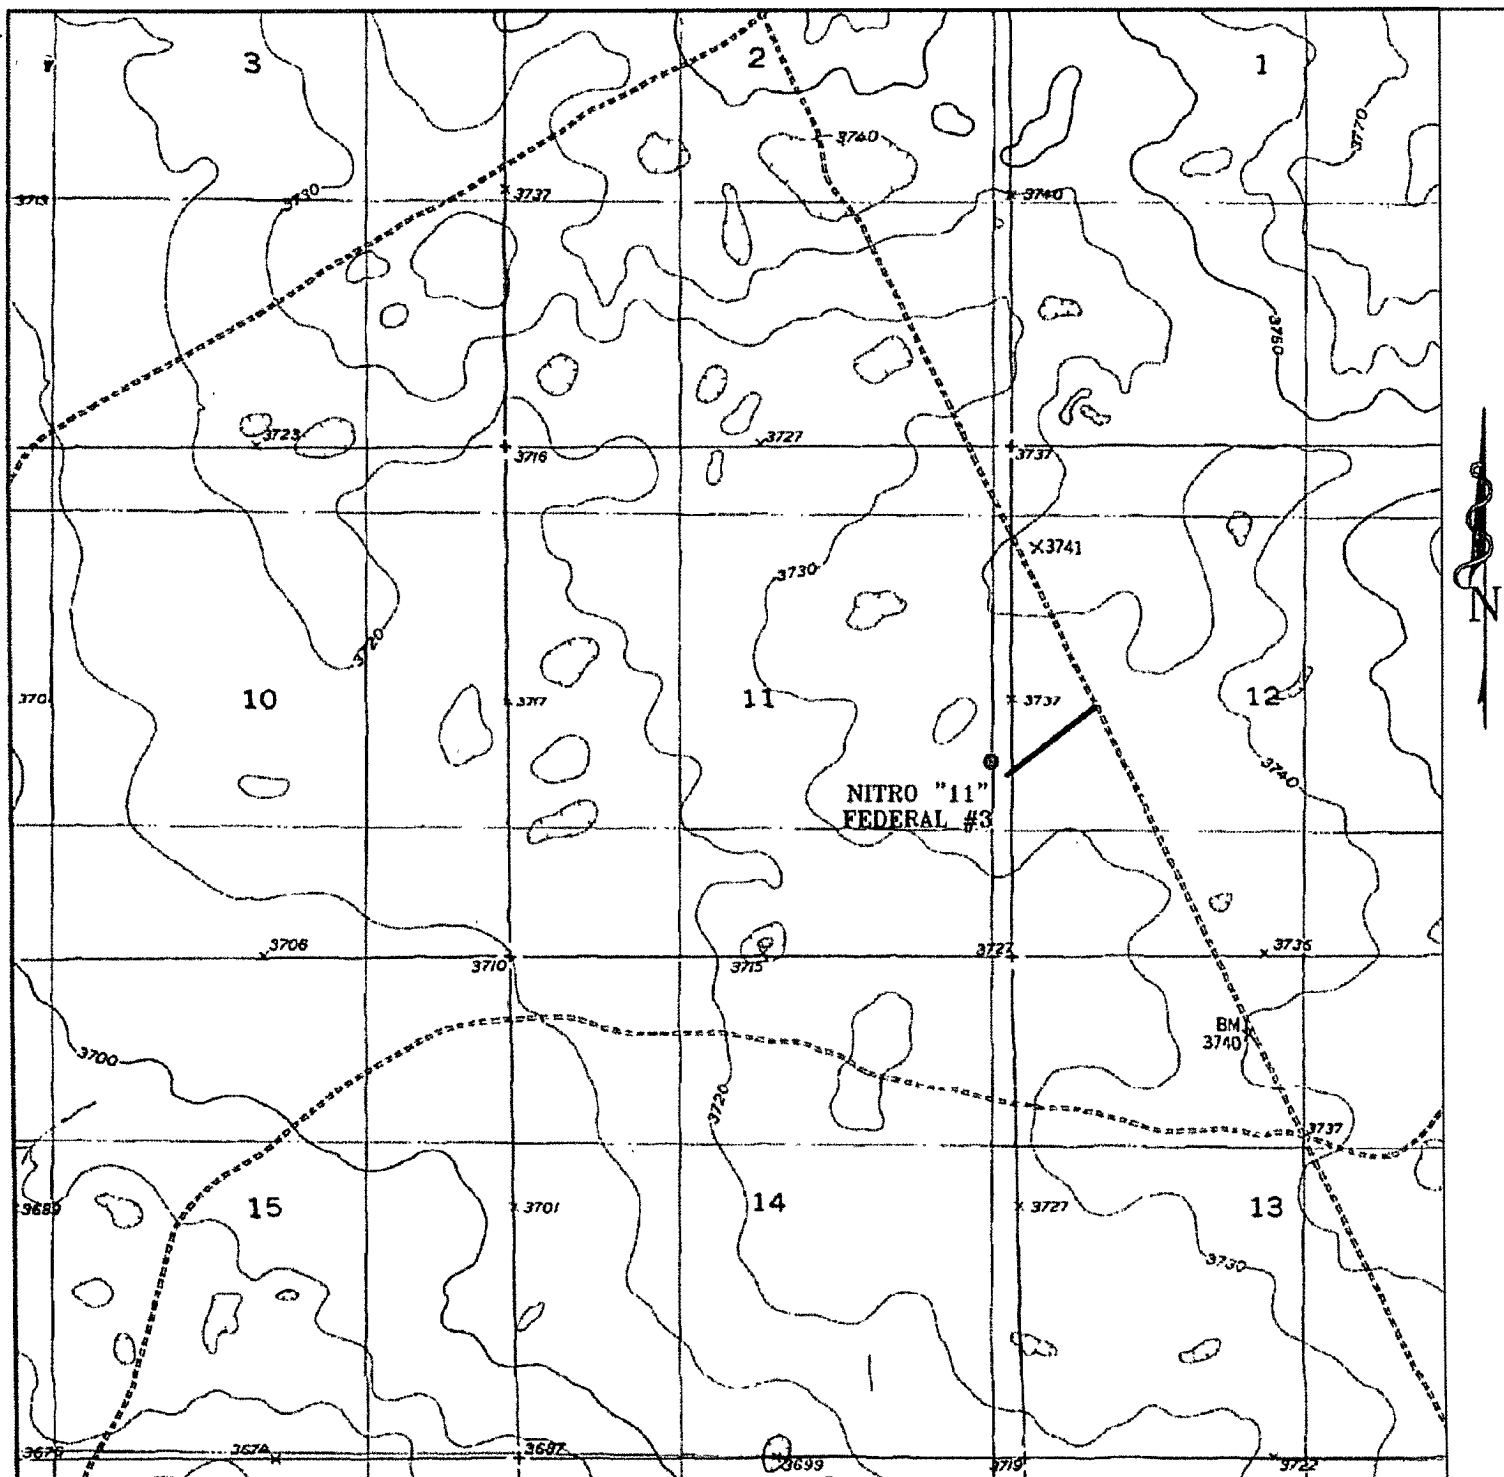

NITRO "11" FEDERAL #3

Located 1980' FSL and 330' FEL

Section 11, Township 16 South, Range 29 East,
N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(505) 393-7316 - Office
(505) 392-3074 - Fax
basinsurveys.com

W.O. Number: JMS 19123T


Survey Date: 01-31-2008

Scale: 1" = 2000'


Date: 02-01-2008

**CIMAREX
ENERGY CO.
OF COLORADO**

Exhibit C

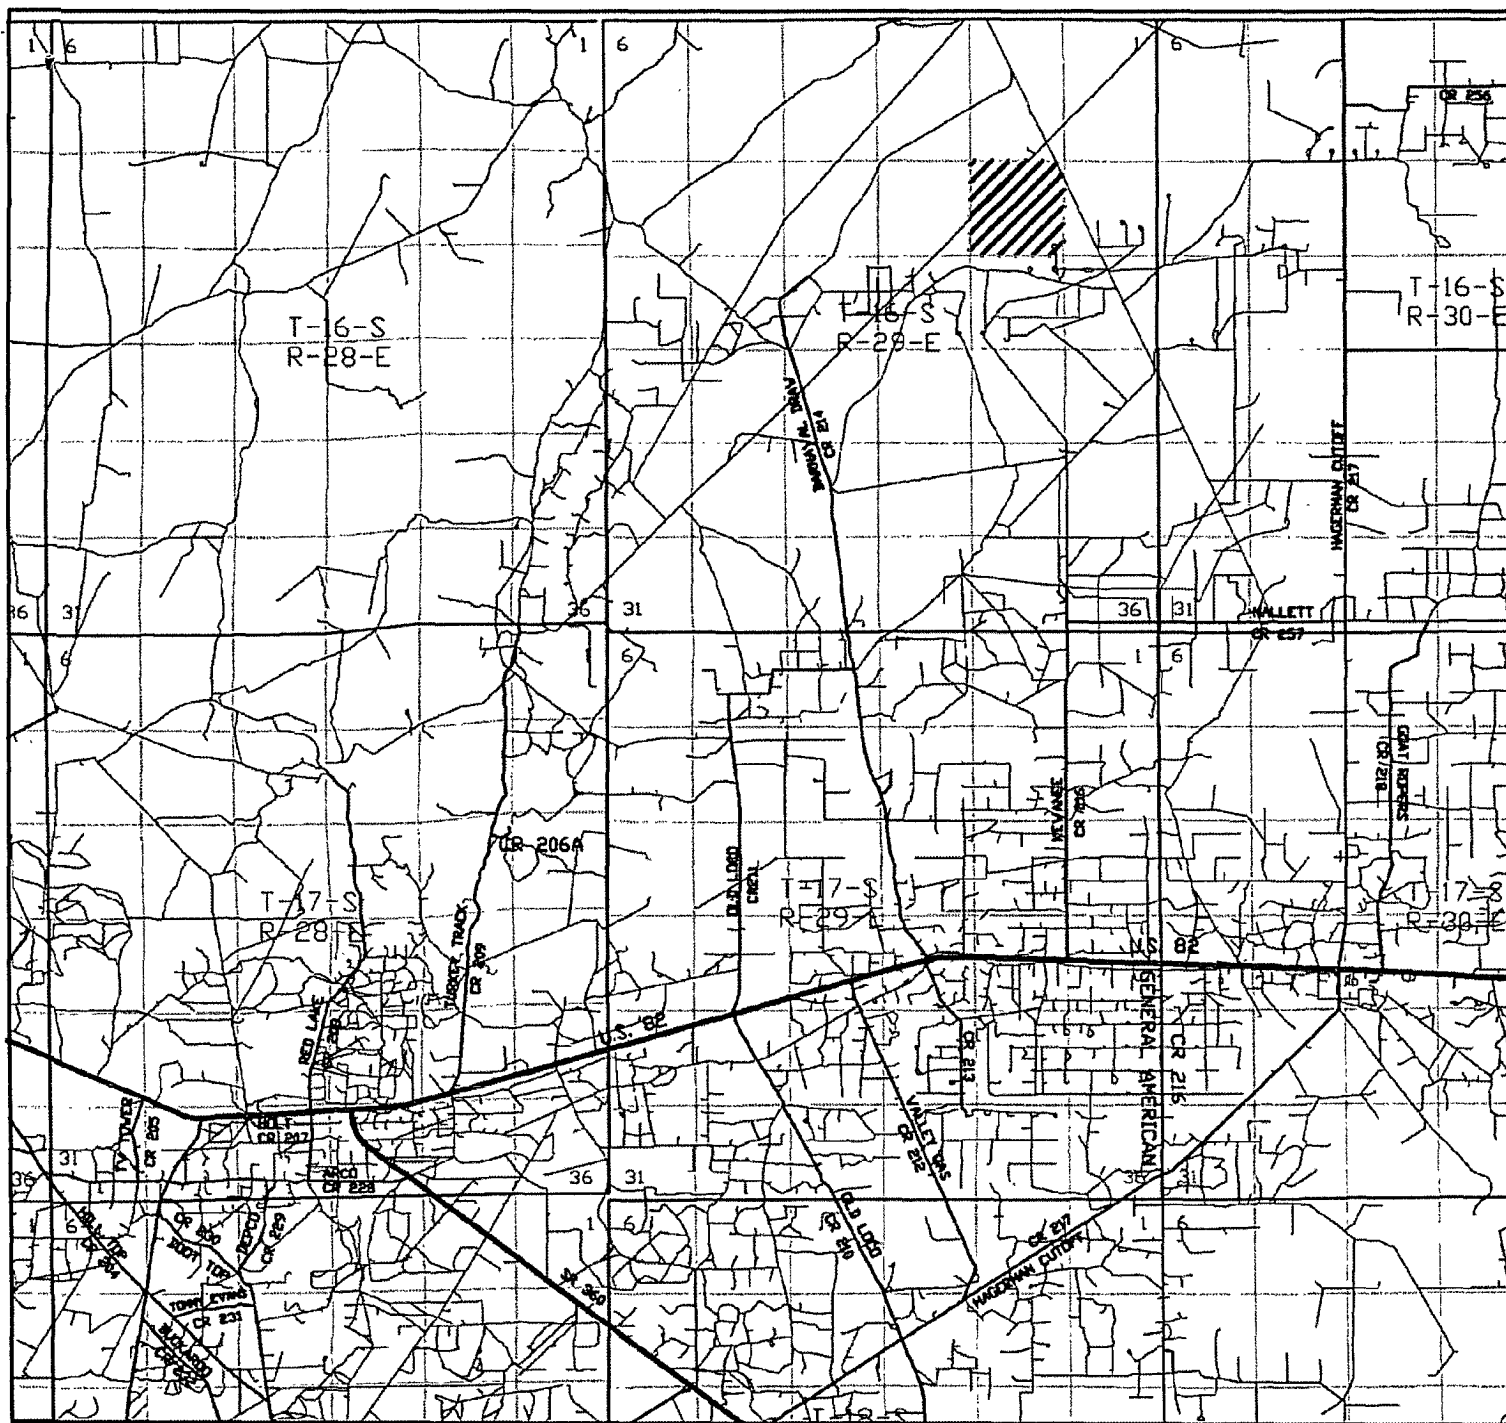

NITRO "11" FEDERAL #3
 Located 1980' FSL and 330' FEL
 Section 11, Township 16 South, Range 29 East,
 N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (505) 393-7316 - Office
 (505) 392-3074 - Fax
 basinsurveys.com

W.O. Number: JMS 19123TR

Survey Date: 01-31-2008

Scale: 1" = 2 MILES

Date: 02-01-2008

CIMAREX
 ENERGY CO.
 OF COLORADO

Exhibit B



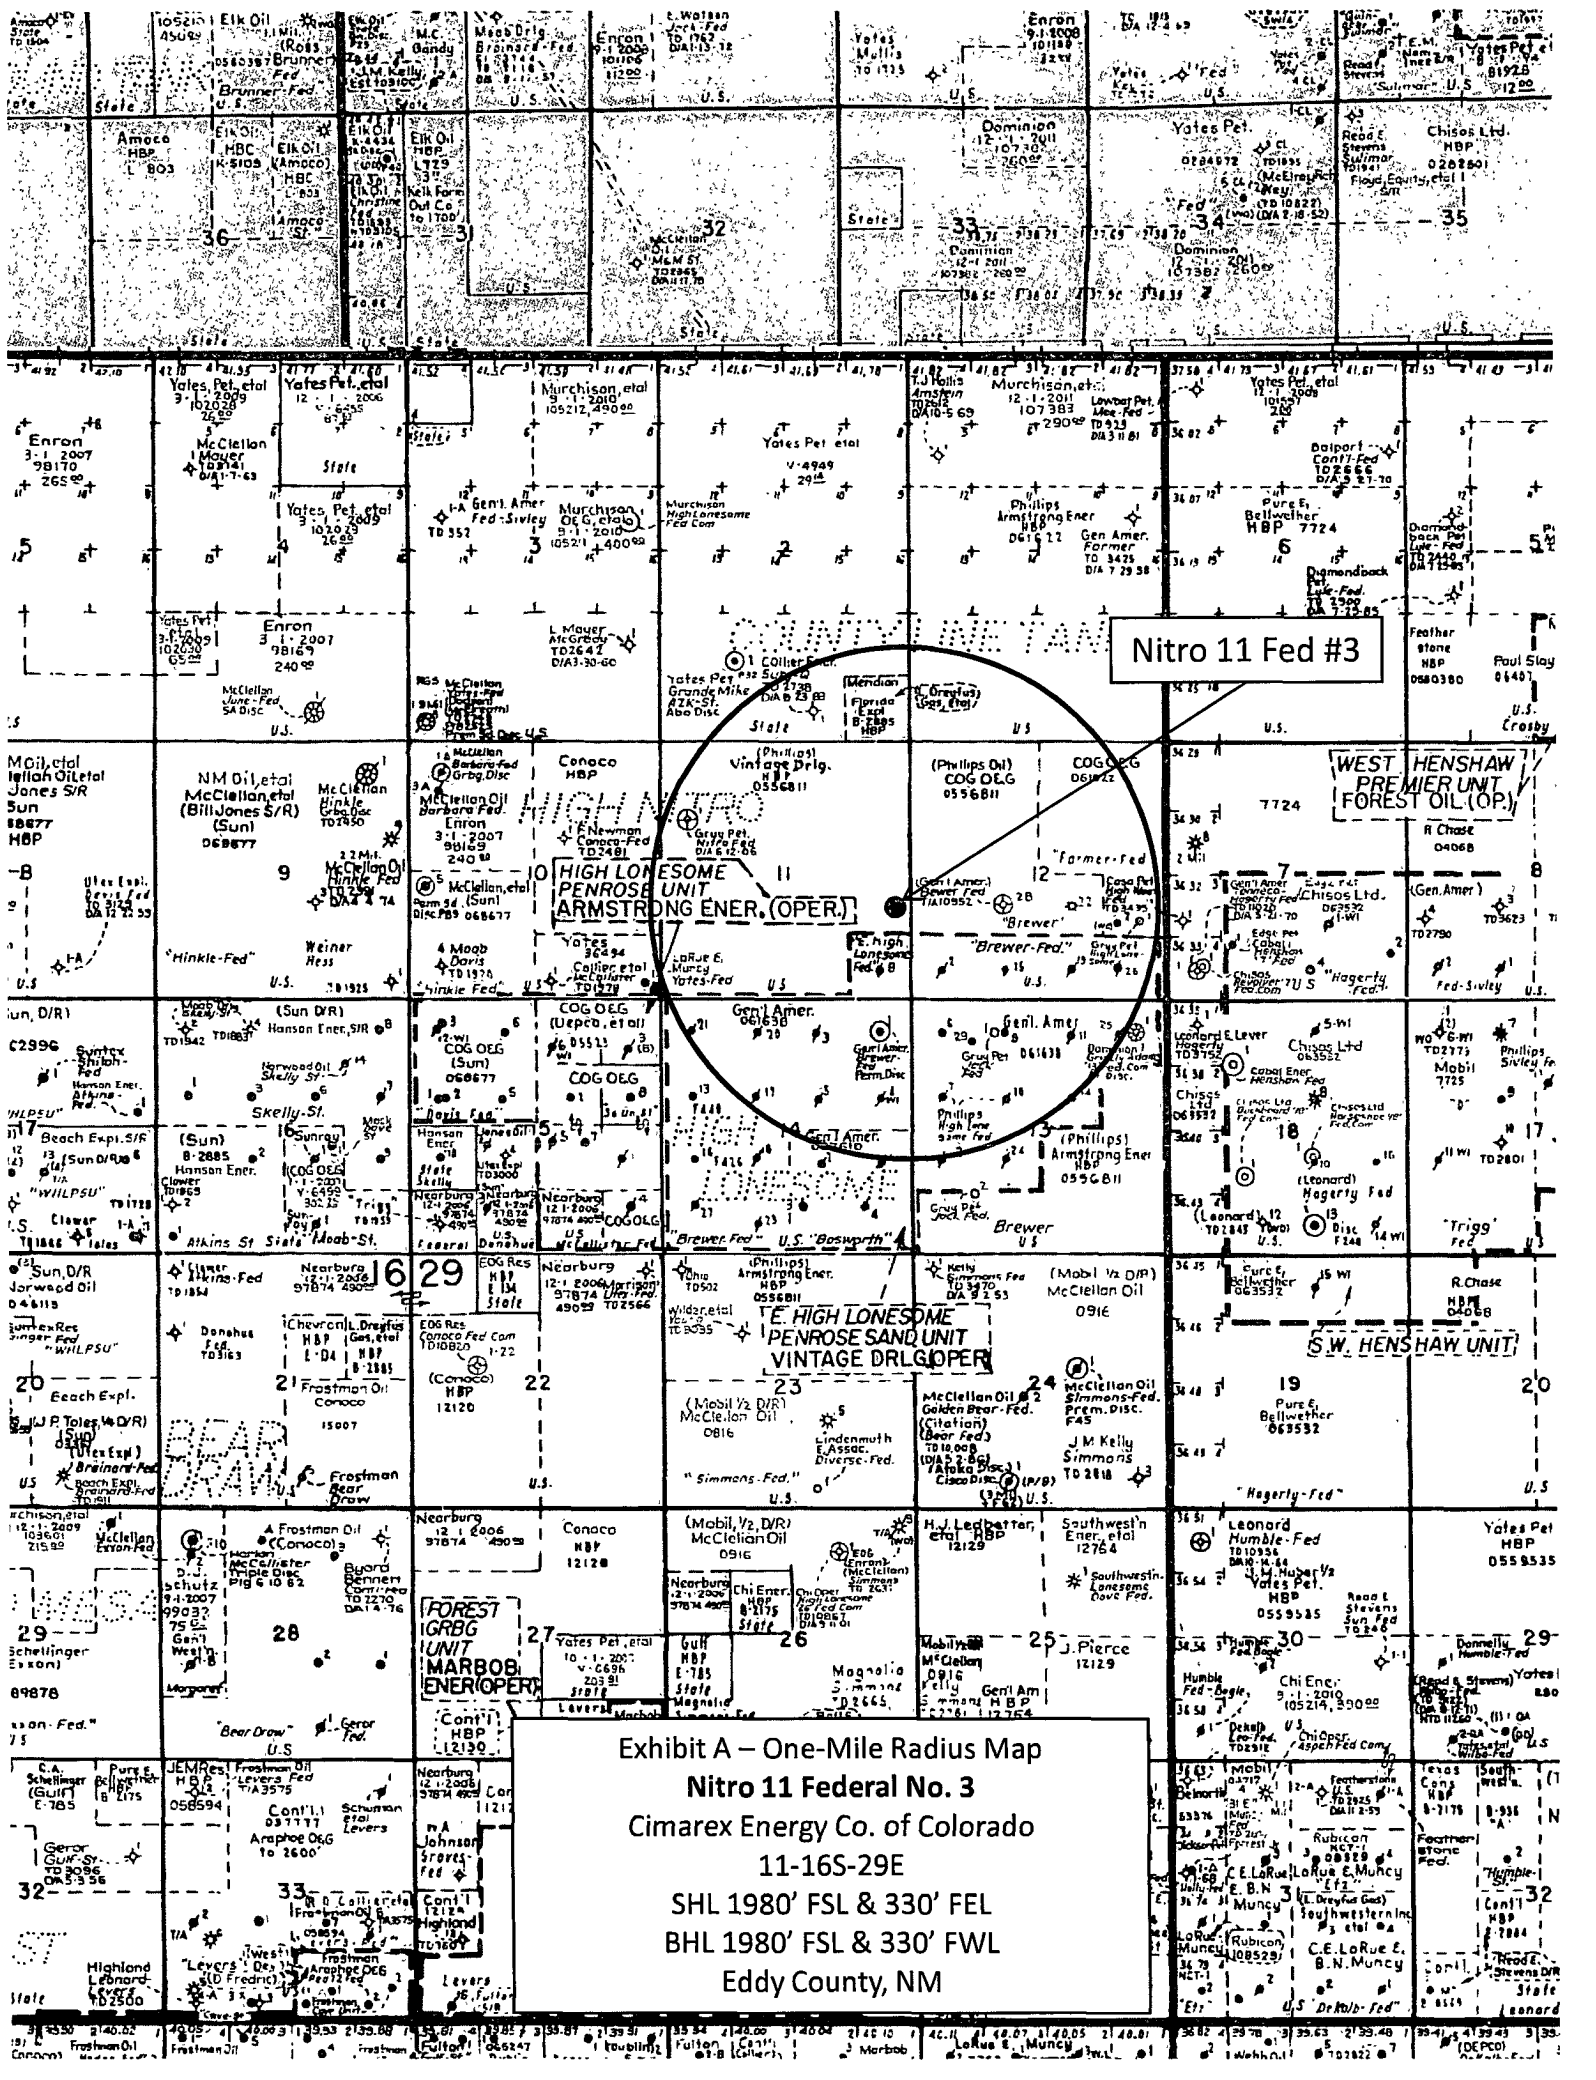


Exhibit A - One-Mile Radius Map
Nitro 11 Federal No. 3
Cimarex Energy Co. of Colorado
11-16S-29E
SHL 1980' FSL & 330' FEL
BHL 1980' FSL & 330' FWL
Eddy County, NM

SECTION 11, TOWNSHIP 16 SOUTH, RANGE 29 EAST, N.M.P.M.,
 EDDY COUNTY, NEW MEXICO.

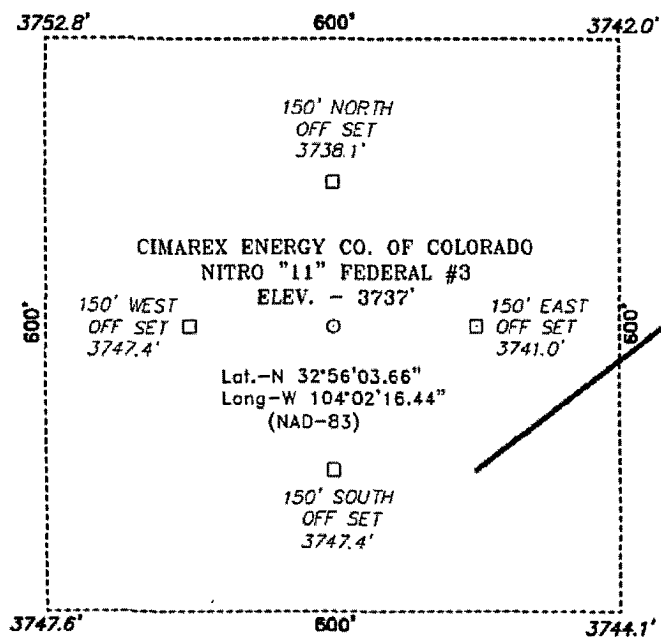

Directions to Location:

FROM JUNCTION OF MALLETT AND HAGERMAN
 CUTOFF, GO WEST ON MALLETT FOR 0.7 MILES TO
 LEASE ROAD. ON LEASE ROAD GO NORTHWEST FOR
 APPROX. 5.0 MILES TO PROPOSED LEASE ROAD.

BASIN SURVEYS P.O. BOX 1786 - HOBBS, NEW MEXICO

W.O. Number: 19123 Drawn By: J. SMALL

Date: 02-01-2008 Disk: JMS 19123W

CIMAREX ENERGY CO. OF COLORADO

REF: NITRO "11" FEDERAL #3 / WELL PAD TOPO

THE NITRO "11" FEDERAL #3 LOCATED 1980'

FROM THE SOUTH LINE AND 330' FROM THE EAST LINE OF
 SECTION 11, TOWNSHIP 16 SOUTH, RANGE 29 EAST,
 N.M.P.M., EDDY COUNTY, NEW MEXICO.

Survey Date: 01-31-2008 Sheet 1 of 1 Sheets

Application to Drill
Nitro 11 Federal No. 3
 Cimarex Energy Co. of Colorado
 Unit I, Section 11
 T16S-R29E, Eddy County, NM

In response to questions asked under Section II B of Bulletin NTL-6, the following information is provided for your consideration:

- 1 Location: SHL 1980' FSL & 330' FEL
 BHL 1980' FNL & 330' FEL
- 2 Elevation above sea level: 3737' GR
- 3 Geologic name of surface formation: Quaternary Alluvium Deposits
- 4 Drilling tools and associated equipment: Conventional rotary drilling rig using fluid as a circulating medium for solids removal.
- 5 Proposed drilling depth: Pilot Hole 7550' MD 11778' TVD 7310'
- 6 Estimated tops of geological markers:

San Andres	2,700'
Abo Shale	6,195'
Lower Abo Dolomite	7,220'
Wolfcamp Lime	7,320'
- 7 Possible mineral bearing formation:

Abo	Oil	Primary
-----	-----	---------

8 Proposed Mud Circulating System:

Depth	Mud Wt	Visc	Fluid Loss	Type Mud
0' to 340'	8.4 - 8.6	28-29	May lose circ	Fresh water gel spud mud
340' to 2,650'	10.0	28-29	May lose circ	Brine Water
2,650' to 7,550'	8.4 - 9.5	29-32	NC	Fresh water and brine, use hi-vis sweeps to keep hole clean
0' to MD 11778' TVD 7310'	8.4 - 9.5	29-33	NC	2% KCL

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs. Mud system monitoring equipment with derrick floor indicators and visual/audio alarms shall be installed and operative prior to drilling into the Wolfcamp formation. This equipment will remain in use until production casing is run and cemented.

8a. Proposed drilling Plan

Drill 8 3/4" hole to 7,550' (pilot hole) and cement (see page 2 - Application to Drill). Set whipstock plug @ 7,039.' Mill window from 7,024' to 7,034.' Kick off 6 1/2" lateral @ 7,029.' Drill 6 1/2" hole to MD 11,778' and TVD 7,550.' Install 4 1/2" Peak Completion Assembly, 600' of BTC from 6,922' to 7,522' and LTC from 7,523' to 11,778.' Liner length 4,856.' Lateral drill hole length 4,639.'

Application to Drill
Cimarex Energy Co. of Colorado
Nitro 11 Federal No. 3
Unit I, Section 11
T16S-R29E, Eddy County, NM

9 Casing & Cementing Program:

see COA

Hole Size	Depth	Casing OD	Weight	Thread	Collar	Grade
17½"	0 to 340'	New 13¾"	48#	8-R	STC	H-40
12¾"	0 to 2,650'	New 9¾"	40#	8-R	LTC	J/K-55
8¾"	0 to 7,550'	New 7"	26#	8-R	LTC	P-110
6¾"	0 to MD 11778' TVD 7310'	New 4½"	11.6#	8-R	LTC/BTC	P-110

10 Cementing & Setting Depth:

13¾" **Surface** Lead: 110 sx Thixotropic/Premium Plus + 1% CaCl + 0.125# Poly-e-flake (wt 14.2, yld 1.64)
Tail: 220 sx Premium Plus + 2% CaCl (wt 14.8, yld 1.35)
TOC Surface

9¾" **Intermediate** Lead: 450 sx Interfill C + 0.125# Poly-e-flake (wt 11.9, yld 2.45)
Tail: 215 sx Prem Plus + 1% CaCl (wt 14.8, yld 1.33)
TOC Surface

7" **Pilot Hole** Lead: 270 sx Interfill H + 0.1% HR-7 + 0.125# Poly-e-flake (wt 11.9, yld 2.76)
Tail: 170 sx Super H + 0.5% Halad-344 + 0.4% CFR-3 + 1# Salt + 5# Gilsonite + 0.125# Poly-e-flake + 0.35% HR-7 (wt 13.2, yld 1.61)
TOC 2300'

4½" **Liner** No cement needed. Peak completion assembly.

Fresh water will be protected by setting 13¾" casing at 340' and cementing to Surface
Hydrocarbon zones will be protected by setting 9¾" casing at 2,650' and cementing to Surface
and by setting 7" casing at 7,550' and cementing to 2300'

Cimarex uses the following minimum safety factors:

Burst	Collapse	Tension
1.125	1.125	1.80

11 Pressure control Equipment:

Exhibit "E". A 13¾" 5000 PSI working pressure B.O.P. consisting of one set of blind rams and one set of pipe rams and a 5000 # annular type preventer. A choke manifold and 120 gallon accumulator with floor and remote operating stations and auxiliary power system. Rotating head below 6000'. A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

BOP unit will be hydraulically operated. BOP will be nipped up and operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling. From the base of the surface pipe through the running of production casing, the well will be equipped with a 5000 psi BOP system.

We are requesting a variance for testing the 13¾" surface casing from Onshore Order No. 2, which states that all casing strings below the conductor shall be pressure tested to 0.22 psi per foot or 1500 psi, whichever is greater, but not to exceed 70% of the manufacturer's stated maximum internal yield. We are requesting to test the 13¾" casing to 1000 psi using rig pumps. The BOP will be tested to 5000 PSI by an independent service company.

Application to Drill
Nitro 11 Federal No. 3
Cimarex Energy Co. of Colorado
Unit I, Section 11
T16S-R29E, Eddy County, NM

12 Testing, Logging and Coring Program:

- A. Mud logging program: 2 man unit from 5,500' to TD
- B. Electric logging program: CNL / LDT / CAL / GR, DLL / CAL / GR
- C. No DSTs or cores are planned at this time.

13 Potential Hazards:

No abnormal pressures or temperatures are expected. In accordance with Onshore Order 6, Cimarex does not anticipate that there will be enough H₂S from the surface to the Abo formations to meet the BLM's minimum requirements for the submission of an "H₂S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since we have an H₂S Safety package on all wells, attached is an "H₂S Drilling Operations Plan." Adequate flare lines will be installed off the mud / gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

Estimated BHP **2300 psi** Estimated BHT **110°**

14 Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved.

Drilling expected to take 30-35 days

If production casing is run an additional 30 days will be required to complete and construct surface facilities.

15 Other Facets of Operations:

After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals.

Abo pay will be perforated and stimulated.

The proposed well will be tested and potentialized as **an oil well.**




DRILLING PROGNOSIS Cimarex Energy Company

3/18/2008

Well: Nitro 11 Fed #3
Location: 11-16S-29E
County, State: Eddy County, NM
Surface Location: 1980 FSL, 330 FEL
Bottomhole Loc: 1980 FSL, 330 FWL
E-Mail:
Wellhead:

Lse Serial #:
Field:
Objective:
TVD/MD: 7310 / 11778
Cementing: Halliburton
Mud:
Motors:
OH Logs: Halliburton
Rig: Key 880
Offset Wells:

Xmas Tree
Tubing: 2 7/8" L80 EUE
Superintendent: Dee Smith
Engineer: Mark Audas

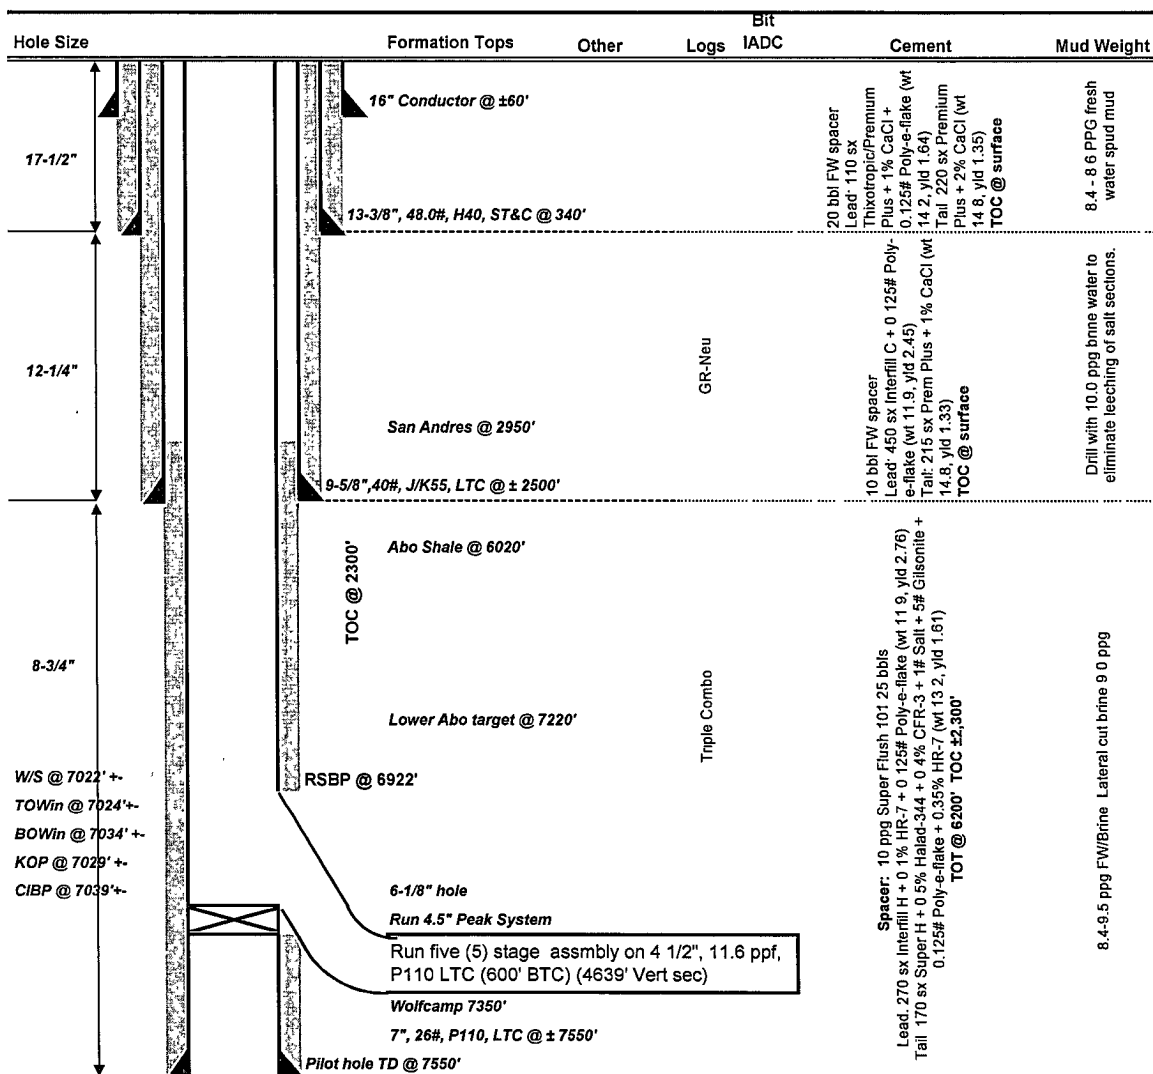

NOTES:

Install wellhead on 13-3/8" and NU BOP. Test this installation to 1000 psi w/ ng pump. Then after setting 9-5/8" in slips and installing the csg spool, NU BOP (5M) w/ rotating head and test BOP to 5M w/ test unit. Test casing.
Cement volumes for surface csg include a 100% excess in the open hole section. If drilling conditions deem necessary, fluid caliper hole and adjust volumes.
Cement volumes for intermediate csg include a 70% excess in the open hole section. If drilling conditions deem necessary, fluid caliper hole and adjust volumes.
Cement volumes for production csg include a 25% excess in the open hole section. Adjust volumes after caliper + 25% excess.

ALL INVOICES ARE TO SHOW **CIMAREX ENERGY** AS OPERATOR AND USE CIMAREX ACCOUNTING CODES.

Cimarex Energy Co., Inc.

Eddy Co., New Mexico

Nitro 11 Federal #3

Nitro 11 Federal #3

Lateral #1

Plan: Plan #1

Standard Survey Report

18 March, 2008

Black Viper Energy

Survey Report

Company:	Cimarex Energy Co., Inc.	Local Co-ordinate Reference:	Well Nitro 11 Federal #3
Project:	Eddy Co., New Mexico	TVD Reference:	WELL @ 3737.00ft (Original Well Elev)
Site:	Nitro 11 Federal #3	MD Reference:	WELL @ 3737.00ft (Original Well Elev)
Well:	Nitro 11 Federal #3	North Reference:	True
Wellbore:	Lateral #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 2003.14 Server Db

Project:	Eddy Co., New Mexico		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Nitro 11 Federal #3				
Site Position:		Northing:	703,778.60 ft	Latitude:	32° 56' 3.647 N
From:	Map	Easting:	631,977.90 ft	Longitude:	104° 2' 16.452 W
Position Uncertainty:	0.00 ft	Spot Radius:	"	Grid Convergence:	0.16 °

Well:	Nitro 11 Federal #3					
Well Position	+N/-S	0.00 ft	Northing:	703,778.60 ft	Latitude:	32° 56' 3.647 N
	+E/-W	0.00 ft	Easting:	631,977.90 ft	Longitude:	104° 2' 16.452 W
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	3,737.00 ft

Wellbore	Lateral #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	3/18/2008	8.23	60.85	49,338

Design:	Plan #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	7,029.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.00	0.00	0.00	270.00

Survey Tool Program		Date	3/18/2008		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
7,029.00	11,777.85	Plan #1 (Lateral #1)	MWD	MWD - Standard	

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
7,029.00	0.00	0.00	7,029.00	0.00	0.00	0.00	0.00	0.00	0.00
7,325.22	88.84	270.00	7,220.00	0.00	-187.18	187.18	29.99	29.99	0.00
7,325.33	88.84	270.00	7,220.00	0.00	-187.29	187.29	0.00	0.00	0.00
Lower Abo Shale									
11,777.85	88.84	270.00	7,310.00	0.00	-4,638.90	4,638.90	0.00	0.00	0.00

Black Viper Energy

Survey Report

Company:	Cimarex Energy Co. Inc.	Local Co-ordinate Reference:	Well Nitro 11 Federal #3
Project:	Eddy Co., New Mexico	TVD Reference:	WELL @ 3737.00ft (Original Well Elev)
Site:	Nitro 11 Federal #3	MD Reference:	WELL @ 3737.00ft (Original Well Elev)
Well:	Nitro 11 Federal #3	North Reference:	True
Wellbore:	Lateral #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 2003.14 Server Db



Targets										
Target Name	hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Shape		(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)		
LL[Nitro11Fed#3]		0.00	0.00	0.00	0.00	0.00	703,778.60	631,977.90	32° 56' 3.647 N	104° 2' 16.452 W
- plan misses by 7029.00ft at 7029.00ft MD (7029.00 TVD, 0.00 N, 0.00 E)										
- Rectangle (sides W5,280.00 H5,280.00 D0.00)										
HL[Nitro11Fed#3]		0.00	0.00	0.00	0.00	0.00	703,778.60	631,977.90	32° 56' 3.647 N	104° 2' 16.452 W
- plan misses by 7029.00ft at 7029.00ft MD (7029.00 TVD, 0.00 N, 0.00 E)										
- Rectangle (sides W4,620.00 H4,620.00 D0.00)										
PBHL#1[Nitro11Fed#3]		0.00	0.00	7,310.00	0.00	-4,638.90	703,765.59	627,339.02	32° 56' 3.644 N	104° 3' 10.883 W
- plan hits target										
- Point										

Formations						
Measured Depth	Vertical Depth	Name	Lithology	Dip	Dip Direction	
(ft)	(ft)			(°)	(°)	
	2,700.00	San Andres		0.00		
	6,195.00	Abo Shale		0.00		
7,325.33	7,220.00	Lower Abo Shale		0.00		
	7,320.00	Wolfcamp		0.00		

Checked By: _____ Approved By: _____ Date: _____



Project: Eddy Co., New Mexico
 Site: Nitro 11 Federal #3
 Well: Nitro 11 Federal #3
 Wellbore: Lateral #1
 Plan: Plan #1 (Nitro 11 Federal #3) (Lateral #1)

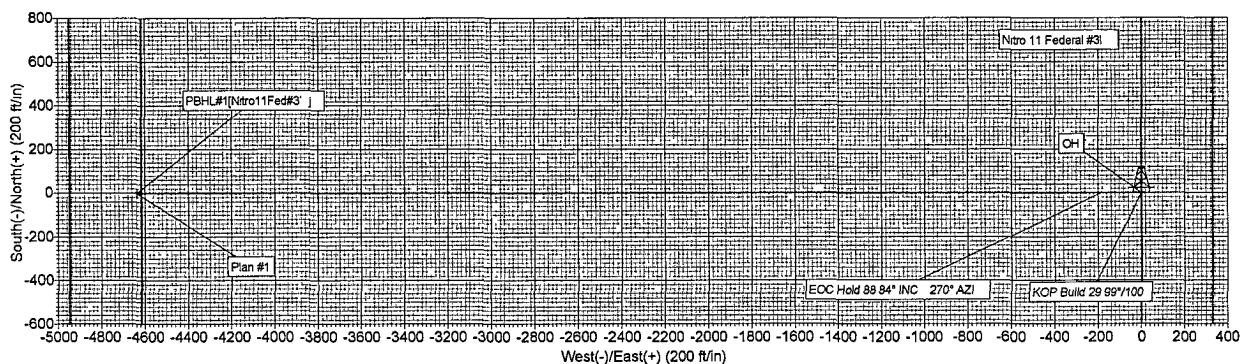


PROJECT DETAILS Eddy Co., New Mexico

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/S	+E/W	DLeg	TFace	VSec	Target
1	7029.00	0.00	0.00	7029.00	0.00	0.00	0.00	0.00	0.00	
2	7325.22	88.84	270.00	7220.00	0.00	-187.18	29.99	270.00	187.18	
3	11777.85	88.84	270.00	7310.00	0.00	-4638.90	0.00	0.00	4638.90	PBHL#1[Nitro11Fed#3]

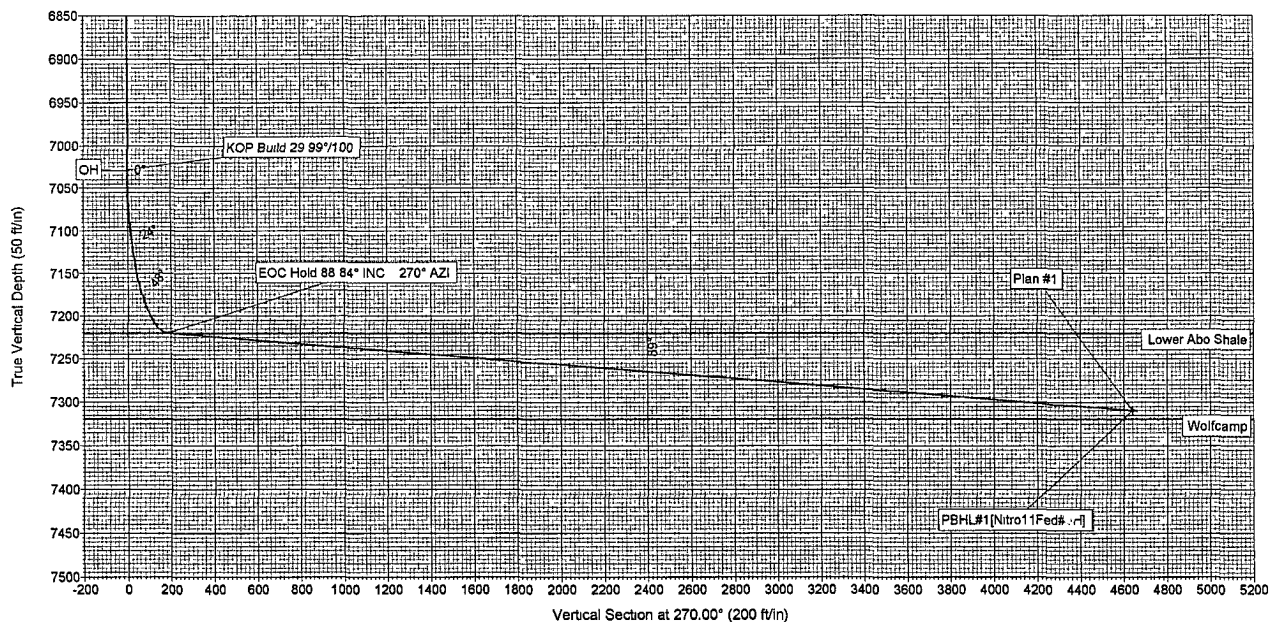

Plan: Plan #1 (Nitro 11 Federal #3) (Lateral #1)
 Created By: Heather Varnoy Date: March 18, 2008

Cimarex Energy Co., Inc.
Nitro 11 Federal #3 - Plan #1

Eddy Co., New Mexico
Nitro 11 Federal #3

Measured Dogleg Depth Rate (ft) (°/100ft)	Incl.	Azim.	Vertical Depth (ft)	Northings (ft)	Eastings (ft)	Vertical Section (ft)
7029.00 0.00	0.000	0.000	7029.00	0.00 N	0.00 E	0.00
7030.00 29.99	0.300	270.000	7030.00	0.00 S	0.00 W	0.00
7040.00 29.99	3.299	270.000	7039.99	0.00 S	0.32 W	0.32
7050.00 29.99	6.298	270.000	7049.96	0.00 S	1.15 W	1.15
7060.00 29.99	9.298	270.000	7059.86	0.00 S	2.51 W	2.51
7070.00 29.99	12.297	270.000	7069.69	0.00 S	4.38 W	4.38
7080.00 29.99	15.296	270.000	7079.40	0.00 S	6.77 W	6.77
7090.00 29.99	18.295	270.000	7088.97	0.00 S	9.66 W	9.66
7100.00 29.99	21.294	270.000	7098.38	0.00 S	13.04 W	13.04
7110.00 29.99	24.294	270.000	7107.59	0.00 S	16.92 W	16.92
7120.00 29.99	27.293	270.000	7116.60	0.00 S	21.27 W	21.27
7130.00 29.99	30.292	270.000	7125.36	0.00 S	26.08 W	26.08
7140.00 29.99	33.291	270.000	7133.86	0.00 S	31.35 W	31.35
7150.00 29.99	36.290	270.000	7142.07	0.00 S	37.06 W	37.06
7160.00 29.99	39.290	270.000	7149.97	0.00 S	43.18 W	43.18
7170.00 29.99	42.289	270.000	7157.54	0.00 S	49.71 W	49.71
7180.00 29.99	45.288	270.000	7164.76	0.00 S	56.63 W	56.63
7190.00 29.99	48.287	270.000	7171.61	0.00 S	63.92 W	63.92
7200.00 29.99	51.286	270.000	7178.06	0.00 S	71.56 W	71.56
7210.00 29.99	54.286	270.000	7184.11	0.00 S	79.52 W	79.52
7220.00 29.99	57.285	270.000	7189.73	0.00 S	87.79 W	87.79
7230.00 29.99	60.284	270.000	7194.91	0.00 S	96.34 W	96.34
7240.00 29.99	63.283	270.000	7199.64	0.00 S	105.15 W	105.15
7250.00 29.99	66.282	270.000	7203.90	0.00 S	114.20 W	114.20
7260.00 29.99	69.282	270.000	7207.68	0.00 S	123.45 W	123.45
7270.00	72.281	270.000	7210.97	0.00 S	132.89 W	132.89

29.99						
7280.00	75.280	270.000	7213.77	0.00 S	142.50 W	142.50
29.99						
7290.00	78.279	270.000	7216.05	0.00 S	152.23 W	152.23
29.99						
7300.00	81.278	270.000	7217.83	0.00 S	162.07 W	162.07
29.99						
7310.00	84.278	270.000	7219.08	0.00 S	171.99 W	171.99
29.99						
7320.00	87.277	270.000	7219.82	0.00 S	181.96 W	181.96
29.99						
7325.22	88.842	270.000	7220.00	0.00 S	187.18 W	187.18
29.99						
7330.00	88.842	270.000	7220.09	0.00 S	191.96 W	191.96
0.00						
7340.00	88.842	270.000	7220.30	0.00 S	201.95 W	201.95
0.00						
7350.00	88.842	270.000	7220.50	0.00 S	211.95 W	211.95
0.00						
7360.00	88.842	270.000	7220.70	0.00 S	221.95 W	221.95
0.00						
7370.00	88.842	270.000	7220.90	0.00 S	231.95 W	231.95
0.00						
7380.00	88.842	270.000	7221.10	0.00 S	241.95 W	241.95
0.00						
7390.00	88.842	270.000	7221.31	0.00 S	251.94 W	251.94
0.00						
7400.00	88.842	270.000	7221.51	0.00 S	261.94 W	261.94
0.00						
7410.00	88.842	270.000	7221.71	0.00 S	271.94 W	271.94
0.00						
7420.00	88.842	270.000	7221.91	0.00 S	281.94 W	281.94
0.00						
7430.00	88.842	270.000	7222.12	0.00 S	291.94 W	291.94
0.00						
7440.00	88.842	270.000	7222.32	0.00 S	301.93 W	301.93
0.00						
7450.00	88.842	270.000	7222.52	0.00 S	311.93 W	311.93
0.00						
7460.00	88.842	270.000	7222.72	0.00 S	321.93 W	321.93
0.00						
7470.00	88.842	270.000	7222.92	0.00 S	331.93 W	331.93
0.00						
7480.00	88.842	270.000	7223.13	0.00 S	341.93 W	341.93
0.00						
7490.00	88.842	270.000	7223.33	0.00 S	351.92 W	351.92
0.00						
7500.00	88.842	270.000	7223.53	0.00 S	361.92 W	361.92
0.00						
7510.00	88.842	270.000	7223.73	0.00 S	371.92 W	371.92
0.00						
7520.00	88.842	270.000	7223.93	0.00 S	381.92 W	381.92
0.00						
7530.00	88.842	270.000	7224.14	0.00 S	391.92 W	391.92
0.00						
7540.00	88.842	270.000	7224.34	0.00 S	401.91 W	401.91
0.00						
7550.00	88.842	270.000	7224.54	0.00 S	411.91 W	411.91
0.00						
7560.00	88.842	270.000	7224.74	0.00 S	421.91 W	421.91
0.00						
7570.00	88.842	270.000	7224.95	0.00 S	431.91 W	431.91
0.00						
7580.00	88.842	270.000	7225.15	0.00 S	441.91 W	441.91

0.00						
7590.00	88.842	270.000	7225.35	0.00 S	451.90 W	451.90
0.00						
7600.00	88.842	270.000	7225.55	0.00 S	461.90 W	461.90
0.00						
7610.00	88.842	270.000	7225.75	0.00 S	471.90 W	471.90
0.00						
7620.00	88.842	270.000	7225.96	0.00 S	481.90 W	481.90
0.00						
7630.00	88.842	270.000	7226.16	0.00 S	491.89 W	491.89
0.00						
7640.00	88.842	270.000	7226.36	0.00 S	501.89 W	501.89
0.00						
7650.00	88.842	270.000	7226.56	0.00 S	511.89 W	511.89
0.00						
7660.00	88.842	270.000	7226.76	0.00 S	521.89 W	521.89
0.00						
7670.00	88.842	270.000	7226.97	0.00 S	531.89 W	531.89
0.00						
7680.00	88.842	270.000	7227.17	0.00 S	541.88 W	541.88
0.00						
7690.00	88.842	270.000	7227.37	0.00 S	551.88 W	551.88
0.00						
7700.00	88.842	270.000	7227.57	0.00 S	561.88 W	561.88
0.00						
7710.00	88.842	270.000	7227.78	0.00 S	571.88 W	571.88
0.00						
7720.00	88.842	270.000	7227.98	0.00 S	581.88 W	581.88
0.00						
7730.00	88.842	270.000	7228.18	0.00 S	591.87 W	591.87
0.00						
7740.00	88.842	270.000	7228.38	0.00 S	601.87 W	601.87
0.00						
7750.00	88.842	270.000	7228.58	0.00 S	611.87 W	611.87
0.00						
7760.00	88.842	270.000	7228.79	0.00 S	621.87 W	621.87
0.00						
7770.00	88.842	270.000	7228.99	0.00 S	631.87 W	631.87
0.00						
7780.00	88.842	270.000	7229.19	0.00 S	641.86 W	641.86
0.00						
7790.00	88.842	270.000	7229.39	0.00 S	651.86 W	651.86
0.00						
7800.00	88.842	270.000	7229.59	0.00 S	661.86 W	661.86
0.00						
7810.00	88.842	270.000	7229.80	0.00 S	671.86 W	671.86
0.00						
7820.00	88.842	270.000	7230.00	0.00 S	681.86 W	681.86
0.00						
7830.00	88.842	270.000	7230.20	0.00 S	691.85 W	691.85
0.00						
7840.00	88.842	270.000	7230.40	0.00 S	701.85 W	701.85
0.00						
7850.00	88.842	270.000	7230.61	0.00 S	711.85 W	711.85
0.00						
7860.00	88.842	270.000	7230.81	0.00 S	721.85 W	721.85
0.00						
7870.00	88.842	270.000	7231.01	0.00 S	731.85 W	731.85
0.00						
7880.00	88.842	270.000	7231.21	0.00 S	741.84 W	741.84
0.00						
7890.00	88.842	270.000	7231.41	0.00 S	751.84 W	751.84
0.00						
7900.00	88.842	270.000	7231.62	0.00 S	761.84 W	761.84

0.00						
7910.00	88.842	270.000	7231.82	0.00 S	771.84 W	771.84
0.00						
7920.00	88.842	270.000	7232.02	0.00 S	781.84 W	781.84
0.00						
7930.00	88.842	270.000	7232.22	0.00 S	791.83 W	791.83
0.00						
7940.00	88.842	270.000	7232.42	0.00 S	801.83 W	801.83
0.00						
7950.00	88.842	270.000	7232.63	0.00 S	811.83 W	811.83
0.00						
7960.00	88.842	270.000	7232.83	0.00 S	821.83 W	821.83
0.00						
7970.00	88.842	270.000	7233.03	0.00 S	831.83 W	831.83
0.00						
7980.00	88.842	270.000	7233.23	0.00 S	841.82 W	841.82
0.00						
7990.00	88.842	270.000	7233.44	0.00 S	851.82 W	851.82
0.00						
8000.00	88.842	270.000	7233.64	0.00 S	861.82 W	861.82
0.00						
8010.00	88.842	270.000	7233.84	0.00 S	871.82 W	871.82
0.00						
8020.00	88.842	270.000	7234.04	0.00 S	881.82 W	881.82
0.00						
8030.00	88.842	270.000	7234.24	0.00 S	891.81 W	891.81
0.00						
8040.00	88.842	270.000	7234.45	0.00 S	901.81 W	901.81
0.00						
8050.00	88.842	270.000	7234.65	0.00 S	911.81 W	911.81
0.00						
8060.00	88.842	270.000	7234.85	0.00 S	921.81 W	921.81
0.00						
8070.00	88.842	270.000	7235.05	0.00 S	931.81 W	931.81
0.00						
8080.00	88.842	270.000	7235.25	0.00 S	941.80 W	941.80
0.00						
8090.00	88.842	270.000	7235.46	0.00 S	951.80 W	951.80
0.00						
8100.00	88.842	270.000	7235.66	0.00 S	961.80 W	961.80
0.00						
8110.00	88.842	270.000	7235.86	0.00 S	971.80 W	971.80
0.00						
8120.00	88.842	270.000	7236.06	0.00 S	981.79 W	981.79
0.00						
8130.00	88.842	270.000	7236.26	0.00 S	991.79 W	991.79
0.00						
8140.00	88.842	270.000	7236.47	0.00 S	1001.79 W	1001.79
0.00						
8150.00	88.842	270.000	7236.67	0.00 S	1011.79 W	1011.79
0.00						
8160.00	88.842	270.000	7236.87	0.00 S	1021.79 W	1021.79
0.00						
8170.00	88.842	270.000	7237.07	0.00 S	1031.78 W	1031.78
0.00						
8180.00	88.842	270.000	7237.28	0.00 S	1041.78 W	1041.78
0.00						
8190.00	88.842	270.000	7237.48	0.00 S	1051.78 W	1051.78
0.00						
8200.00	88.842	270.000	7237.68	0.00 S	1061.78 W	1061.78
0.00						
8210.00	88.842	270.000	7237.88	0.00 S	1071.78 W	1071.78
0.00						
8220.00	88.842	270.000	7238.08	0.00 S	1081.77 W	1081.77

0.00						
8230.00	88.842	270.000	7238.29	0.00 S	1091.77 W	1091.77
0.00						
8240.00	88.842	270.000	7238.49	0.00 S	1101.77 W	1101.77
0.00						
8250.00	88.842	270.000	7238.69	0.00 S	1111.77 W	1111.77
0.00						
8260.00	88.842	270.000	7238.89	0.00 S	1121.77 W	1121.77
0.00						
8270.00	88.842	270.000	7239.09	0.00 S	1131.76 W	1131.76
0.00						
8280.00	88.842	270.000	7239.30	0.00 S	1141.76 W	1141.76
0.00						
8290.00	88.842	270.000	7239.50	0.00 S	1151.76 W	1151.76
0.00						
8300.00	88.842	270.000	7239.70	0.00 S	1161.76 W	1161.76
0.00						
8310.00	88.842	270.000	7239.90	0.00 S	1171.76 W	1171.76
0.00						
8320.00	88.842	270.000	7240.11	0.00 S	1181.75 W	1181.75
0.00						
8330.00	88.842	270.000	7240.31	0.00 S	1191.75 W	1191.75
0.00						
8340.00	88.842	270.000	7240.51	0.00 S	1201.75 W	1201.75
0.00						
8350.00	88.842	270.000	7240.71	0.00 S	1211.75 W	1211.75
0.00						
8360.00	88.842	270.000	7240.91	0.00 S	1221.75 W	1221.75
0.00						
8370.00	88.842	270.000	7241.12	0.00 S	1231.74 W	1231.74
0.00						
8380.00	88.842	270.000	7241.32	0.00 S	1241.74 W	1241.74
0.00						
8390.00	88.842	270.000	7241.52	0.00 S	1251.74 W	1251.74
0.00						
8400.00	88.842	270.000	7241.72	0.00 S	1261.74 W	1261.74
0.00						
8410.00	88.842	270.000	7241.92	0.00 S	1271.74 W	1271.74
0.00						
8420.00	88.842	270.000	7242.13	0.00 S	1281.73 W	1281.73
0.00						
8430.00	88.842	270.000	7242.33	0.00 S	1291.73 W	1291.73
0.00						
8440.00	88.842	270.000	7242.53	0.00 S	1301.73 W	1301.73
0.00						
8450.00	88.842	270.000	7242.73	0.00 S	1311.73 W	1311.73
0.00						
8460.00	88.842	270.000	7242.94	0.00 S	1321.73 W	1321.73
0.00						
8470.00	88.842	270.000	7243.14	0.00 S	1331.72 W	1331.72
0.00						
8480.00	88.842	270.000	7243.34	0.00 S	1341.72 W	1341.72
0.00						
8490.00	88.842	270.000	7243.54	0.00 S	1351.72 W	1351.72
0.00						
8500.00	88.842	270.000	7243.74	0.00 S	1361.72 W	1361.72
0.00						
8510.00	88.842	270.000	7243.95	0.00 S	1371.72 W	1371.72
0.00						
8520.00	88.842	270.000	7244.15	0.00 S	1381.71 W	1381.71
0.00						
8530.00	88.842	270.000	7244.35	0.00 S	1391.71 W	1391.71
0.00						
8540.00	88.842	270.000	7244.55	0.00 S	1401.71 W	1401.71

0.00							
8550.00	88.842	270.000	7244.75	0.00 S	1411.71 W	1411.71	
0.00							
8560.00	88.842	270.000	7244.96	0.00 S	1421.70 W	1421.70	
0.00							
8570.00	88.842	270.000	7245.16	0.00 S	1431.70 W	1431.70	
0.00							
8580.00	88.842	270.000	7245.36	0.00 S	1441.70 W	1441.70	
0.00							
8590.00	88.842	270.000	7245.56	0.00 S	1451.70 W	1451.70	
0.00							
8600.00	88.842	270.000	7245.77	0.00 S	1461.70 W	1461.70	
0.00							
8610.00	88.842	270.000	7245.97	0.00 S	1471.69 W	1471.69	
0.00							
8620.00	88.842	270.000	7246.17	0.00 S	1481.69 W	1481.69	
0.00							
8630.00	88.842	270.000	7246.37	0.00 S	1491.69 W	1491.69	
0.00							
8640.00	88.842	270.000	7246.57	0.00 S	1501.69 W	1501.69	
0.00							
8650.00	88.842	270.000	7246.78	0.00 S	1511.69 W	1511.69	
0.00							
8660.00	88.842	270.000	7246.98	0.00 S	1521.68 W	1521.68	
0.00							
8670.00	88.842	270.000	7247.18	0.00 S	1531.68 W	1531.68	
0.00							
8680.00	88.842	270.000	7247.38	0.00 S	1541.68 W	1541.68	
0.00							
8690.00	88.842	270.000	7247.58	0.00 S	1551.68 W	1551.68	
0.00							
8700.00	88.842	270.000	7247.79	0.00 S	1561.68 W	1561.68	
0.00							
8710.00	88.842	270.000	7247.99	0.00 S	1571.67 W	1571.67	
0.00							
8720.00	88.842	270.000	7248.19	0.00 S	1581.67 W	1581.67	
0.00							
8730.00	88.842	270.000	7248.39	0.00 S	1591.67 W	1591.67	
0.00							
8740.00	88.842	270.000	7248.60	0.00 S	1601.67 W	1601.67	
0.00							
8750.00	88.842	270.000	7248.80	0.00 S	1611.67 W	1611.67	
0.00							
8760.00	88.842	270.000	7249.00	0.00 S	1621.66 W	1621.66	
0.00							
8770.00	88.842	270.000	7249.20	0.00 S	1631.66 W	1631.66	
0.00							
8780.00	88.842	270.000	7249.40	0.00 S	1641.66 W	1641.66	
0.00							
8790.00	88.842	270.000	7249.61	0.00 S	1651.66 W	1651.66	
0.00							
8800.00	88.842	270.000	7249.81	0.00 S	1661.66 W	1661.66	
0.00							
8810.00	88.842	270.000	7250.01	0.00 S	1671.65 W	1671.65	
0.00							
8820.00	88.842	270.000	7250.21	0.00 S	1681.65 W	1681.65	
0.00							
8830.00	88.842	270.000	7250.41	0.00 S	1691.65 W	1691.65	
0.00							
8840.00	88.842	270.000	7250.62	0.00 S	1701.65 W	1701.65	
0.00							
8850.00	88.842	270.000	7250.82	0.00 S	1711.65 W	1711.65	
0.00							
8860.00	88.842	270.000	7251.02	0.00 S	1721.64 W	1721.64	

0.00						
8870.00	88.842	270.000	7251.22	0.00 S	1731.64 W	1731.64
0.00						
8880.00	88.842	270.000	7251.42	0.00 S	1741.64 W	1741.64
0.00						
8890.00	88.842	270.000	7251.63	0.00 S	1751.64 W	1751.64
0.00						
8900.00	88.842	270.000	7251.83	0.00 S	1761.64 W	1761.64
0.00						
8910.00	88.842	270.000	7252.03	0.00 S	1771.63 W	1771.63
0.00						
8920.00	88.842	270.000	7252.23	0.00 S	1781.63 W	1781.63
0.00						
8930.00	88.842	270.000	7252.44	0.00 S	1791.63 W	1791.63
0.00						
8940.00	88.842	270.000	7252.64	0.00 S	1801.63 W	1801.63
0.00						
8950.00	88.842	270.000	7252.84	0.00 S	1811.63 W	1811.63
0.00						
8960.00	88.842	270.000	7253.04	0.00 S	1821.62 W	1821.62
0.00						
8970.00	88.842	270.000	7253.24	0.00 S	1831.62 W	1831.62
0.00						
8980.00	88.842	270.000	7253.45	0.00 S	1841.62 W	1841.62
0.00						
8990.00	88.842	270.000	7253.65	0.00 S	1851.62 W	1851.62
0.00						
9000.00	88.842	270.000	7253.85	0.00 S	1861.62 W	1861.62
0.00						
9010.00	88.842	270.000	7254.05	0.00 S	1871.61 W	1871.61
0.00						
9020.00	88.842	270.000	7254.25	0.00 S	1881.61 W	1881.61
0.00						
9030.00	88.842	270.000	7254.46	0.00 S	1891.61 W	1891.61
0.00						
9040.00	88.842	270.000	7254.66	0.00 S	1901.61 W	1901.61
0.00						
9050.00	88.842	270.000	7254.86	0.00 S	1911.60 W	1911.60
0.00						
9060.00	88.842	270.000	7255.06	0.00 S	1921.60 W	1921.60
0.00						
9070.00	88.842	270.000	7255.27	0.00 S	1931.60 W	1931.60
0.00						
9080.00	88.842	270.000	7255.47	0.00 S	1941.60 W	1941.60
0.00						
9090.00	88.842	270.000	7255.67	0.00 S	1951.60 W	1951.60
0.00						
9100.00	88.842	270.000	7255.87	0.00 S	1961.59 W	1961.59
0.00						
9110.00	88.842	270.000	7256.07	0.00 S	1971.59 W	1971.59
0.00						
9120.00	88.842	270.000	7256.28	0.00 S	1981.59 W	1981.59
0.00						
9130.00	88.842	270.000	7256.48	0.00 S	1991.59 W	1991.59
0.00						
9140.00	88.842	270.000	7256.68	0.00 S	2001.59 W	2001.59
0.00						
9150.00	88.842	270.000	7256.88	0.00 S	2011.58 W	2011.58
0.00						
9160.00	88.842	270.000	7257.08	0.00 S	2021.58 W	2021.58
0.00						
9170.00	88.842	270.000	7257.29	0.00 S	2031.58 W	2031.58
0.00						
9180.00	88.842	270.000	7257.49	0.00 S	2041.58 W	2041.58

0.00							
9190.00	88.842	270.000	7257.69	0.00 S	2051.58 W	2051.58	
0.00							
9200.00	88.842	270.000	7257.89	0.00 S	2061.57 W	2061.57	
0.00							
9210.00	88.842	270.000	7258.10	0.00 S	2071.57 W	2071.57	
0.00							
9220.00	88.842	270.000	7258.30	0.00 S	2081.57 W	2081.57	
0.00							
9230.00	88.842	270.000	7258.50	0.00 S	2091.57 W	2091.57	
0.00							
9240.00	88.842	270.000	7258.70	0.00 S	2101.57 W	2101.57	
0.00							
9250.00	88.842	270.000	7258.90	0.00 S	2111.56 W	2111.56	
0.00							
9260.00	88.842	270.000	7259.11	0.00 S	2121.56 W	2121.56	
0.00							
9270.00	88.842	270.000	7259.31	0.00 S	2131.56 W	2131.56	
0.00							
9280.00	88.842	270.000	7259.51	0.00 S	2141.56 W	2141.56	
0.00							
9290.00	88.842	270.000	7259.71	0.00 S	2151.56 W	2151.56	
0.00							
9300.00	88.842	270.000	7259.91	0.00 S	2161.55 W	2161.55	
0.00							
9310.00	88.842	270.000	7260.12	0.00 S	2171.55 W	2171.55	
0.00							
9320.00	88.842	270.000	7260.32	0.00 S	2181.55 W	2181.55	
0.00							
9330.00	88.842	270.000	7260.52	0.00 S	2191.55 W	2191.55	
0.00							
9340.00	88.842	270.000	7260.72	0.00 S	2201.55 W	2201.55	
0.00							
9350.00	88.842	270.000	7260.93	0.00 S	2211.54 W	2211.54	
0.00							
9360.00	88.842	270.000	7261.13	0.00 S	2221.54 W	2221.54	
0.00							
9370.00	88.842	270.000	7261.33	0.00 S	2231.54 W	2231.54	
0.00							
9380.00	88.842	270.000	7261.53	0.00 S	2241.54 W	2241.54	
0.00							
9390.00	88.842	270.000	7261.73	0.00 S	2251.54 W	2251.54	
0.00							
9400.00	88.842	270.000	7261.94	0.00 S	2261.53 W	2261.53	
0.00							
9410.00	88.842	270.000	7262.14	0.00 S	2271.53 W	2271.53	
0.00							
9420.00	88.842	270.000	7262.34	0.00 S	2281.53 W	2281.53	
0.00							
9430.00	88.842	270.000	7262.54	0.00 S	2291.53 W	2291.53	
0.00							
9440.00	88.842	270.000	7262.74	0.00 S	2301.53 W	2301.53	
0.00							
9450.00	88.842	270.000	7262.95	0.00 S	2311.52 W	2311.52	
0.00							
9460.00	88.842	270.000	7263.15	0.00 S	2321.52 W	2321.52	
0.00							
9470.00	88.842	270.000	7263.35	0.00 S	2331.52 W	2331.52	
0.00							
9480.00	88.842	270.000	7263.55	0.00 S	2341.52 W	2341.52	
0.00							
9490.00	88.842	270.000	7263.75	0.00 S	2351.51 W	2351.51	
0.00							
9500.00	88.842	270.000	7263.96	0.00 S	2361.51 W	2361.51	

0.00						
9510.00	88.842	270.000	7264.16	0.00 S	2371.51 W	2371.51
0.00						
9520.00	88.842	270.000	7264.36	0.00 S	2381.51 W	2381.51
0.00						
9530.00	88.842	270.000	7264.56	0.00 S	2391.51 W	2391.51
0.00						
9540.00	88.842	270.000	7264.77	0.00 S	2401.50 W	2401.50
0.00						
9550.00	88.842	270.000	7264.97	0.00 S	2411.50 W	2411.50
0.00						
9560.00	88.842	270.000	7265.17	0.00 S	2421.50 W	2421.50
0.00						
9570.00	88.842	270.000	7265.37	0.00 S	2431.50 W	2431.50
0.00						
9580.00	88.842	270.000	7265.57	0.00 S	2441.50 W	2441.50
0.00						
9590.00	88.842	270.000	7265.78	0.00 S	2451.49 W	2451.49
0.00						
9600.00	88.842	270.000	7265.98	0.00 S	2461.49 W	2461.49
0.00						
9610.00	88.842	270.000	7266.18	0.00 S	2471.49 W	2471.49
0.00						
9620.00	88.842	270.000	7266.38	0.00 S	2481.49 W	2481.49
0.00						
9630.00	88.842	270.000	7266.58	0.00 S	2491.49 W	2491.49
0.00						
9640.00	88.842	270.000	7266.79	0.00 S	2501.48 W	2501.48
0.00						
9650.00	88.842	270.000	7266.99	0.00 S	2511.48 W	2511.48
0.00						
9660.00	88.842	270.000	7267.19	0.00 S	2521.48 W	2521.48
0.00						
9670.00	88.842	270.000	7267.39	0.00 S	2531.48 W	2531.48
0.00						
9680.00	88.842	270.000	7267.60	0.00 S	2541.48 W	2541.48
0.00						
9690.00	88.842	270.000	7267.80	0.00 S	2551.47 W	2551.47
0.00						
9700.00	88.842	270.000	7268.00	0.00 S	2561.47 W	2561.47
0.00						
9710.00	88.842	270.000	7268.20	0.00 S	2571.47 W	2571.47
0.00						
9720.00	88.842	270.000	7268.40	0.00 S	2581.47 W	2581.47
0.00						
9730.00	88.842	270.000	7268.61	0.00 S	2591.47 W	2591.47
0.00						
9740.00	88.842	270.000	7268.81	0.00 S	2601.46 W	2601.46
0.00						
9750.00	88.842	270.000	7269.01	0.00 S	2611.46 W	2611.46
0.00						
9760.00	88.842	270.000	7269.21	0.00 S	2621.46 W	2621.46
0.00						
9770.00	88.842	270.000	7269.41	0.00 S	2631.46 W	2631.46
0.00						
9780.00	88.842	270.000	7269.62	0.00 S	2641.46 W	2641.46
0.00						
9790.00	88.842	270.000	7269.82	0.00 S	2651.45 W	2651.45
0.00						
9800.00	88.842	270.000	7270.02	0.00 S	2661.45 W	2661.45
0.00						
9810.00	88.842	270.000	7270.22	0.00 S	2671.45 W	2671.45
0.00						
9820.00	88.842	270.000	7270.43	0.00 S	2681.45 W	2681.45

0.00							
9830.00	88.842	270.000	7270.63	0.00 S	2691.45 W	2691.45	
0.00							
9840.00	88.842	270.000	7270.83	0.00 S	2701.44 W	2701.44	
0.00							
9850.00	88.842	270.000	7271.03	0.00 S	2711.44 W	2711.44	
0.00							
9860.00	88.842	270.000	7271.23	0.00 S	2721.44 W	2721.44	
0.00							
9870.00	88.842	270.000	7271.44	0.00 S	2731.44 W	2731.44	
0.00							
9880.00	88.842	270.000	7271.64	0.00 S	2741.44 W	2741.44	
0.00							
9890.00	88.842	270.000	7271.84	0.00 S	2751.43 W	2751.43	
0.00							
9900.00	88.842	270.000	7272.04	0.00 S	2761.43 W	2761.43	
0.00							
9910.00	88.842	270.000	7272.24	0.00 S	2771.43 W	2771.43	
0.00							
9920.00	88.842	270.000	7272.45	0.00 S	2781.43 W	2781.43	
0.00							
9930.00	88.842	270.000	7272.65	0.00 S	2791.43 W	2791.43	
0.00							
9940.00	88.842	270.000	7272.85	0.00 S	2801.42 W	2801.42	
0.00							
9950.00	88.842	270.000	7273.05	0.00 S	2811.42 W	2811.42	
0.00							
9960.00	88.842	270.000	7273.26	0.00 S	2821.42 W	2821.42	
0.00							
9970.00	88.842	270.000	7273.46	0.00 S	2831.42 W	2831.42	
0.00							
9980.00	88.842	270.000	7273.66	0.00 S	2841.41 W	2841.41	
0.00							
9990.00	88.842	270.000	7273.86	0.00 S	2851.41 W	2851.41	
0.00							
10000.00	88.842	270.000	7274.06	0.00 S	2861.41 W	2861.41	
0.00							
10010.00	88.842	270.000	7274.27	0.00 S	2871.41 W	2871.41	
0.00							
10020.00	88.842	270.000	7274.47	0.00 S	2881.41 W	2881.41	
0.00							
10030.00	88.842	270.000	7274.67	0.00 S	2891.40 W	2891.40	
0.00							
10040.00	88.842	270.000	7274.87	0.00 S	2901.40 W	2901.40	
0.00							
10050.00	88.842	270.000	7275.07	0.00 S	2911.40 W	2911.40	
0.00							
10060.00	88.842	270.000	7275.28	0.00 S	2921.40 W	2921.40	
0.00							
10070.00	88.842	270.000	7275.48	0.00 S	2931.40 W	2931.40	
0.00							
10080.00	88.842	270.000	7275.68	0.00 S	2941.39 W	2941.39	
0.00							
10090.00	88.842	270.000	7275.88	0.00 S	2951.39 W	2951.39	
0.00							
10100.00	88.842	270.000	7276.09	0.00 S	2961.39 W	2961.39	
0.00							
10110.00	88.842	270.000	7276.29	0.00 S	2971.39 W	2971.39	
0.00							
10120.00	88.842	270.000	7276.49	0.00 S	2981.39 W	2981.39	
0.00							
10130.00	88.842	270.000	7276.69	0.00 S	2991.38 W	2991.38	
0.00							
10140.00	88.842	270.000	7276.89	0.00 S	3001.38 W	3001.38	

0.00							
10150.00	88.842	270.000	7277.10	0.00	S	3011.38 W	3011.38
0.00							
10160.00	88.842	270.000	7277.30	0.00	S	3021.38 W	3021.38
0.00							
10170.00	88.842	270.000	7277.50	0.00	S	3031.38 W	3031.38
0.00							
10180.00	88.842	270.000	7277.70	0.00	S	3041.37 W	3041.37
0.00							
10190.00	88.842	270.000	7277.90	0.00	S	3051.37 W	3051.37
0.00							
10200.00	88.842	270.000	7278.11	0.00	S	3061.37 W	3061.37
0.00							
10210.00	88.842	270.000	7278.31	0.00	S	3071.37 W	3071.37
0.00							
10220.00	88.842	270.000	7278.51	0.00	S	3081.37 W	3081.37
0.00							
10230.00	88.842	270.000	7278.71	0.00	S	3091.36 W	3091.36
0.00							
10240.00	88.842	270.000	7278.91	0.00	S	3101.36 W	3101.36
0.00							
10250.00	88.842	270.000	7279.12	0.00	S	3111.36 W	3111.36
0.00							
10260.00	88.842	270.000	7279.32	0.00	S	3121.36 W	3121.36
0.00							
10270.00	88.842	270.000	7279.52	0.00	S	3131.36 W	3131.36
0.00							
10280.00	88.842	270.000	7279.72	0.00	S	3141.35 W	3141.35
0.00							
10290.00	88.842	270.000	7279.93	0.00	S	3151.35 W	3151.35
0.00							
10300.00	88.842	270.000	7280.13	0.00	S	3161.35 W	3161.35
0.00							
10310.00	88.842	270.000	7280.33	0.00	S	3171.35 W	3171.35
0.00							
10320.00	88.842	270.000	7280.53	0.00	S	3181.35 W	3181.35
0.00							
10330.00	88.842	270.000	7280.73	0.00	S	3191.34 W	3191.34
0.00							
10340.00	88.842	270.000	7280.94	0.00	S	3201.34 W	3201.34
0.00							
10350.00	88.842	270.000	7281.14	0.00	S	3211.34 W	3211.34
0.00							
10360.00	88.842	270.000	7281.34	0.00	S	3221.34 W	3221.34
0.00							
10370.00	88.842	270.000	7281.54	0.00	S	3231.34 W	3231.34
0.00							
10380.00	88.842	270.000	7281.74	0.00	S	3241.33 W	3241.33
0.00							
10390.00	88.842	270.000	7281.95	0.00	S	3251.33 W	3251.33
0.00							
10400.00	88.842	270.000	7282.15	0.00	S	3261.33 W	3261.33
0.00							
10410.00	88.842	270.000	7282.35	0.00	S	3271.33 W	3271.33
0.00							
10420.00	88.842	270.000	7282.55	0.00	S	3281.32 W	3281.32
0.00							
10430.00	88.842	270.000	7282.76	0.00	S	3291.32 W	3291.32
0.00							
10440.00	88.842	270.000	7282.96	0.00	S	3301.32 W	3301.32
0.00							
10450.00	88.842	270.000	7283.16	0.00	S	3311.32 W	3311.32
0.00							
10460.00	88.842	270.000	7283.36	0.00	S	3321.32 W	3321.32

0.00							
10470.00	88.842	270.000	7283.56	0.00 S	3331.31 W	3331.31	
0.00							
10480.00	88.842	270.000	7283.77	0.00 S	3341.31 W	3341.31	
0.00							
10490.00	88.842	270.000	7283.97	0.00 S	3351.31 W	3351.31	
0.00							
10500.00	88.842	270.000	7284.17	0.00 S	3361.31 W	3361.31	
0.00							
10510.00	88.842	270.000	7284.37	0.00 S	3371.31 W	3371.31	
0.00							
10520.00	88.842	270.000	7284.57	0.00 S	3381.30 W	3381.30	
0.00							
10530.00	88.842	270.000	7284.78	0.00 S	3391.30 W	3391.30	
0.00							
10540.00	88.842	270.000	7284.98	0.00 S	3401.30 W	3401.30	
0.00							
10550.00	88.842	270.000	7285.18	0.00 S	3411.30 W	3411.30	
0.00							
10560.00	88.842	270.000	7285.38	0.00 S	3421.30 W	3421.30	
0.00							
10570.00	88.842	270.000	7285.59	0.00 S	3431.29 W	3431.29	
0.00							
10580.00	88.842	270.000	7285.79	0.00 S	3441.29 W	3441.29	
0.00							
10590.00	88.842	270.000	7285.99	0.00 S	3451.29 W	3451.29	
0.00							
10600.00	88.842	270.000	7286.19	0.00 S	3461.29 W	3461.29	
0.00							
10610.00	88.842	270.000	7286.39	0.00 S	3471.29 W	3471.29	
0.00							
10620.00	88.842	270.000	7286.60	0.00 S	3481.28 W	3481.28	
0.00							
10630.00	88.842	270.000	7286.80	0.00 S	3491.28 W	3491.28	
0.00							
10640.00	88.842	270.000	7287.00	0.00 S	3501.28 W	3501.28	
0.00							
10650.00	88.842	270.000	7287.20	0.00 S	3511.28 W	3511.28	
0.00							
10660.00	88.842	270.000	7287.40	0.00 S	3521.28 W	3521.28	
0.00							
10670.00	88.842	270.000	7287.61	0.00 S	3531.27 W	3531.27	
0.00							
10680.00	88.842	270.000	7287.81	0.00 S	3541.27 W	3541.27	
0.00							
10690.00	88.842	270.000	7288.01	0.00 S	3551.27 W	3551.27	
0.00							
10700.00	88.842	270.000	7288.21	0.00 S	3561.27 W	3561.27	
0.00							
10710.00	88.842	270.000	7288.42	0.00 S	3571.27 W	3571.27	
0.00							
10720.00	88.842	270.000	7288.62	0.00 S	3581.26 W	3581.26	
0.00							
10730.00	88.842	270.000	7288.82	0.00 S	3591.26 W	3591.26	
0.00							
10740.00	88.842	270.000	7289.02	0.00 S	3601.26 W	3601.26	
0.00							
10750.00	88.842	270.000	7289.22	0.00 S	3611.26 W	3611.26	
0.00							
10760.00	88.842	270.000	7289.43	0.00 S	3621.26 W	3621.26	
0.00							
10770.00	88.842	270.000	7289.63	0.00 S	3631.25 W	3631.25	
0.00							
10780.00	88.842	270.000	7289.83	0.00 S	3641.25 W	3641.25	

0.00						
10790.00	88.842	270.000	7290.03	0.00 S	3651.25 W	3651.25
0.00						
10800.00	88.842	270.000	7290.23	0.00 S	3661.25 W	3661.25
0.00						
10810.00	88.842	270.000	7290.44	0.00 S	3671.25 W	3671.25
0.00						
10820.00	88.842	270.000	7290.64	0.00 S	3681.24 W	3681.24
0.00						
10830.00	88.842	270.000	7290.84	0.00 S	3691.24 W	3691.24
0.00						
10840.00	88.842	270.000	7291.04	0.00 S	3701.24 W	3701.24
0.00						
10850.00	88.842	270.000	7291.25	0.00 S	3711.24 W	3711.24
0.00						
10860.00	88.842	270.000	7291.45	0.00 S	3721.24 W	3721.24
0.00						
10870.00	88.842	270.000	7291.65	0.00 S	3731.23 W	3731.23
0.00						
10880.00	88.842	270.000	7291.85	0.00 S	3741.23 W	3741.23
0.00						
10890.00	88.842	270.000	7292.05	0.00 S	3751.23 W	3751.23
0.00						
10900.00	88.842	270.000	7292.26	0.00 S	3761.23 W	3761.23
0.00						
10910.00	88.842	270.000	7292.46	0.00 S	3771.22 W	3771.22
0.00						
10920.00	88.842	270.000	7292.66	0.00 S	3781.22 W	3781.22
0.00						
10930.00	88.842	270.000	7292.86	0.00 S	3791.22 W	3791.22
0.00						
10940.00	88.842	270.000	7293.06	0.00 S	3801.22 W	3801.22
0.00						
10950.00	88.842	270.000	7293.27	0.00 S	3811.22 W	3811.22
0.00						
10960.00	88.842	270.000	7293.47	0.00 S	3821.21 W	3821.21
0.00						
10970.00	88.842	270.000	7293.67	0.00 S	3831.21 W	3831.21
0.00						
10980.00	88.842	270.000	7293.87	0.00 S	3841.21 W	3841.21
0.00						
10990.00	88.842	270.000	7294.07	0.00 S	3851.21 W	3851.21
0.00						
11000.00	88.842	270.000	7294.28	0.00 S	3861.21 W	3861.21
0.00						
11010.00	88.842	270.000	7294.48	0.00 S	3871.20 W	3871.20
0.00						
11020.00	88.842	270.000	7294.68	0.00 S	3881.20 W	3881.20
0.00						
11030.00	88.842	270.000	7294.88	0.00 S	3891.20 W	3891.20
0.00						
11040.00	88.842	270.000	7295.09	0.00 S	3901.20 W	3901.20
0.00						
11050.00	88.842	270.000	7295.29	0.00 S	3911.20 W	3911.20
0.00						
11060.00	88.842	270.000	7295.49	0.00 S	3921.19 W	3921.19
0.00						
11070.00	88.842	270.000	7295.69	0.00 S	3931.19 W	3931.19
0.00						
11080.00	88.842	270.000	7295.89	0.00 S	3941.19 W	3941.19
0.00						
11090.00	88.842	270.000	7296.10	0.00 S	3951.19 W	3951.19
0.00						
11100.00	88.842	270.000	7296.30	0.00 S	3961.19 W	3961.19

0.00							
11110.00	88.842	270.000	7296.50	0.00 S	3971.18 W	3971.18	
0.00							
11120.00	88.842	270.000	7296.70	0.00 S	3981.18 W	3981.18	
0.00							
11130.00	88.842	270.000	7296.90	0.00 S	3991.18 W	3991.18	
0.00							
11140.00	88.842	270.000	7297.11	0.00 S	4001.18 W	4001.18	
0.00							
11150.00	88.842	270.000	7297.31	0.00 S	4011.18 W	4011.18	
0.00							
11160.00	88.842	270.000	7297.51	0.00 S	4021.17 W	4021.17	
0.00							
11170.00	88.842	270.000	7297.71	0.00 S	4031.17 W	4031.17	
0.00							
11180.00	88.842	270.000	7297.92	0.00 S	4041.17 W	4041.17	
0.00							
11190.00	88.842	270.000	7298.12	0.00 S	4051.17 W	4051.17	
0.00							
11200.00	88.842	270.000	7298.32	0.00 S	4061.17 W	4061.17	
0.00							
11210.00	88.842	270.000	7298.52	0.00 S	4071.16 W	4071.16	
0.00							
11220.00	88.842	270.000	7298.72	0.00 S	4081.16 W	4081.16	
0.00							
11230.00	88.842	270.000	7298.93	0.00 S	4091.16 W	4091.16	
0.00							
11240.00	88.842	270.000	7299.13	0.00 S	4101.16 W	4101.16	
0.00							
11250.00	88.842	270.000	7299.33	0.00 S	4111.16 W	4111.16	
0.00							
11260.00	88.842	270.000	7299.53	0.00 S	4121.15 W	4121.15	
0.00							
11270.00	88.842	270.000	7299.73	0.00 S	4131.15 W	4131.15	
0.00							
11280.00	88.842	270.000	7299.94	0.00 S	4141.15 W	4141.15	
0.00							
11290.00	88.842	270.000	7300.14	0.00 S	4151.15 W	4151.15	
0.00							
11300.00	88.842	270.000	7300.34	0.00 S	4161.15 W	4161.15	
0.00							
11310.00	88.842	270.000	7300.54	0.00 S	4171.14 W	4171.14	
0.00							
11320.00	88.842	270.000	7300.75	0.00 S	4181.14 W	4181.14	
0.00							
11330.00	88.842	270.000	7300.95	0.00 S	4191.14 W	4191.14	
0.00							
11340.00	88.842	270.000	7301.15	0.00 S	4201.14 W	4201.14	
0.00							
11350.00	88.842	270.000	7301.35	0.00 S	4211.13 W	4211.13	
0.00							
11360.00	88.842	270.000	7301.55	0.00 S	4221.13 W	4221.13	
0.00							
11370.00	88.842	270.000	7301.76	0.00 S	4231.13 W	4231.13	
0.00							
11380.00	88.842	270.000	7301.96	0.00 S	4241.13 W	4241.13	
0.00							
11390.00	88.842	270.000	7302.16	0.00 S	4251.13 W	4251.13	
0.00							
11400.00	88.842	270.000	7302.36	0.00 S	4261.12 W	4261.12	
0.00							
11410.00	88.842	270.000	7302.56	0.00 S	4271.12 W	4271.12	
0.00							
11420.00	88.842	270.000	7302.77	0.00 S	4281.12 W	4281.12	

0.00						
11430.00	88.842	270.000	7302.97	0.00 S	4291.12 W	4291.12
0.00						
11440.00	88.842	270.000	7303.17	0.00 S	4301.12 W	4301.12
0.00						
11450.00	88.842	270.000	7303.37	0.00 S	4311.11 W	4311.11
0.00						
11460.00	88.842	270.000	7303.58	0.00 S	4321.11 W	4321.11
0.00						
11470.00	88.842	270.000	7303.78	0.00 S	4331.11 W	4331.11
0.00						
11480.00	88.842	270.000	7303.98	0.00 S	4341.11 W	4341.11
0.00						
11490.00	88.842	270.000	7304.18	0.00 S	4351.11 W	4351.11
0.00						
11500.00	88.842	270.000	7304.38	0.00 S	4361.10 W	4361.10
0.00						
11510.00	88.842	270.000	7304.59	0.00 S	4371.10 W	4371.10
0.00						
11520.00	88.842	270.000	7304.79	0.00 S	4381.10 W	4381.10
0.00						
11530.00	88.842	270.000	7304.99	0.00 S	4391.10 W	4391.10
0.00						
11540.00	88.842	270.000	7305.19	0.00 S	4401.10 W	4401.10
0.00						
11550.00	88.842	270.000	7305.39	0.00 S	4411.09 W	4411.09
0.00						
11560.00	88.842	270.000	7305.60	0.00 S	4421.09 W	4421.09
0.00						
11570.00	88.842	270.000	7305.80	0.00 S	4431.09 W	4431.09
0.00						
11580.00	88.842	270.000	7306.00	0.00 S	4441.09 W	4441.09
0.00						
11590.00	88.842	270.000	7306.20	0.00 S	4451.09 W	4451.09
0.00						
11600.00	88.842	270.000	7306.41	0.00 S	4461.08 W	4461.08
0.00						
11610.00	88.842	270.000	7306.61	0.00 S	4471.08 W	4471.08
0.00						
11620.00	88.842	270.000	7306.81	0.00 S	4481.08 W	4481.08
0.00						
11630.00	88.842	270.000	7307.01	0.00 S	4491.08 W	4491.08
0.00						
11640.00	88.842	270.000	7307.21	0.00 S	4501.08 W	4501.08
0.00						
11650.00	88.842	270.000	7307.42	0.00 S	4511.07 W	4511.07
0.00						
11660.00	88.842	270.000	7307.62	0.00 S	4521.07 W	4521.07
0.00						
11670.00	88.842	270.000	7307.82	0.00 S	4531.07 W	4531.07
0.00						
11680.00	88.842	270.000	7308.02	0.00 S	4541.07 W	4541.07
0.00						
11690.00	88.842	270.000	7308.22	0.00 S	4551.07 W	4551.07
0.00						
11700.00	88.842	270.000	7308.43	0.00 S	4561.06 W	4561.06
0.00						
11710.00	88.842	270.000	7308.63	0.00 S	4571.06 W	4571.06
0.00						
11720.00	88.842	270.000	7308.83	0.00 S	4581.06 W	4581.06
0.00						
11730.00	88.842	270.000	7309.03	0.00 S	4591.06 W	4591.06
0.00						
11740.00	88.842	270.000	7309.23	0.00 S	4601.06 W	4601.06

0.00	11750.00	88.842	270.000	7309.44	0.00 S	4611.05 W	4611.05
0.00	11760.00	88.842	270.000	7309.64	0.00 S	4621.05 W	4621.05
0.00	11770.00	88.842	270.000	7309.84	0.00 S	4631.05 W	4631.05
0.00	11777.85	88.842	270.000	7310.00	0.00 S	4638.90 W	4638.90


All data are in feet unless otherwise stated. Directions and coordinates are relative to True North.
Vertical depths are relative to WELL. Northings and Eastings are relative to Well.

The Dogleg Severity is in Degrees per 100 feet.
Vertical Section is from Site and calculated along an Azimuth of 270.000° (True).

Coordinate System is North American Datum 1983 US State Plane 1983, New Mexico Eastern Zone.
Central meridian is -104.333°.
Grid Convergence at Surface is 0.161°.

Based upon Minimum Curvature type calculations, at a Measured Depth of 11777.85ft., the Bottom Hole Displacement is 4638.90ft., in the Direction of 270.000° (True).


Key Rig 880

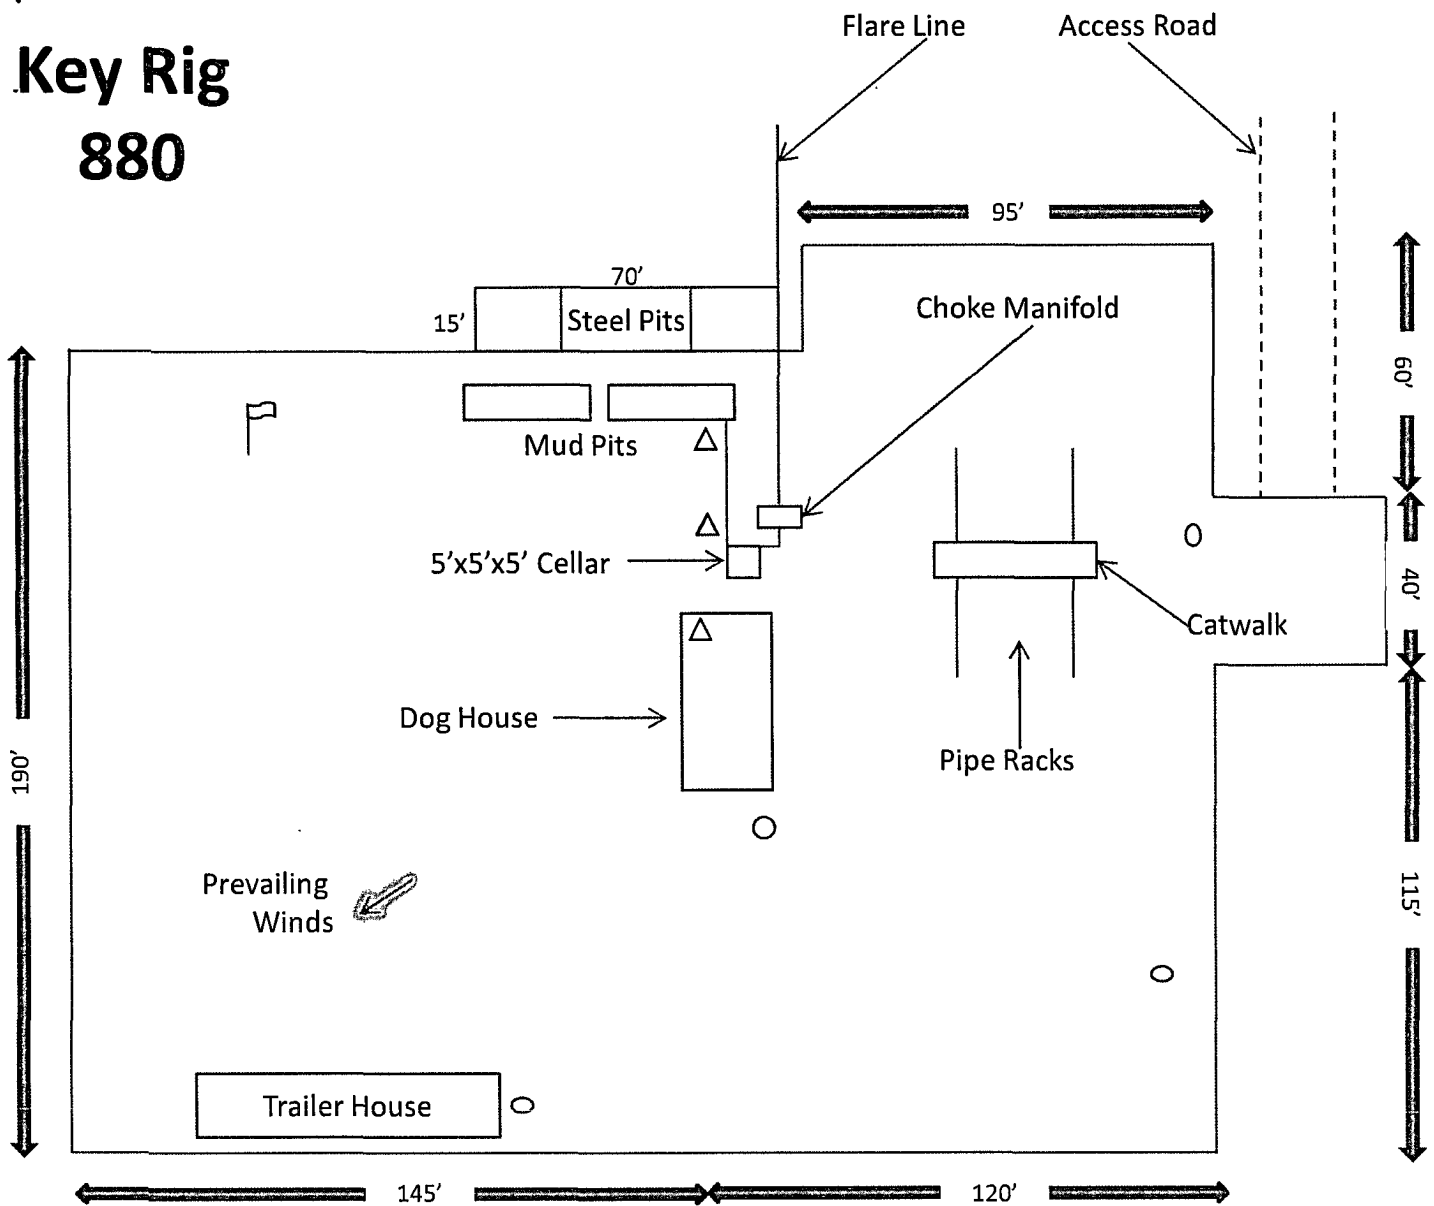

- Wind Direction Indicators
(wind sock or streamers)
- △ H2S Monitors
(alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote BOP Closing Unit

Exhibit D – Rig Diagram
Nitro 11 Federal No. 3
 Cimarex Energy Co. of Colorado
 11-16S-29E
 SHL 1980' FSL & 330' FEL
 BHL 1980' FSL & 330' FWL
 Eddy County, NM

SR & A

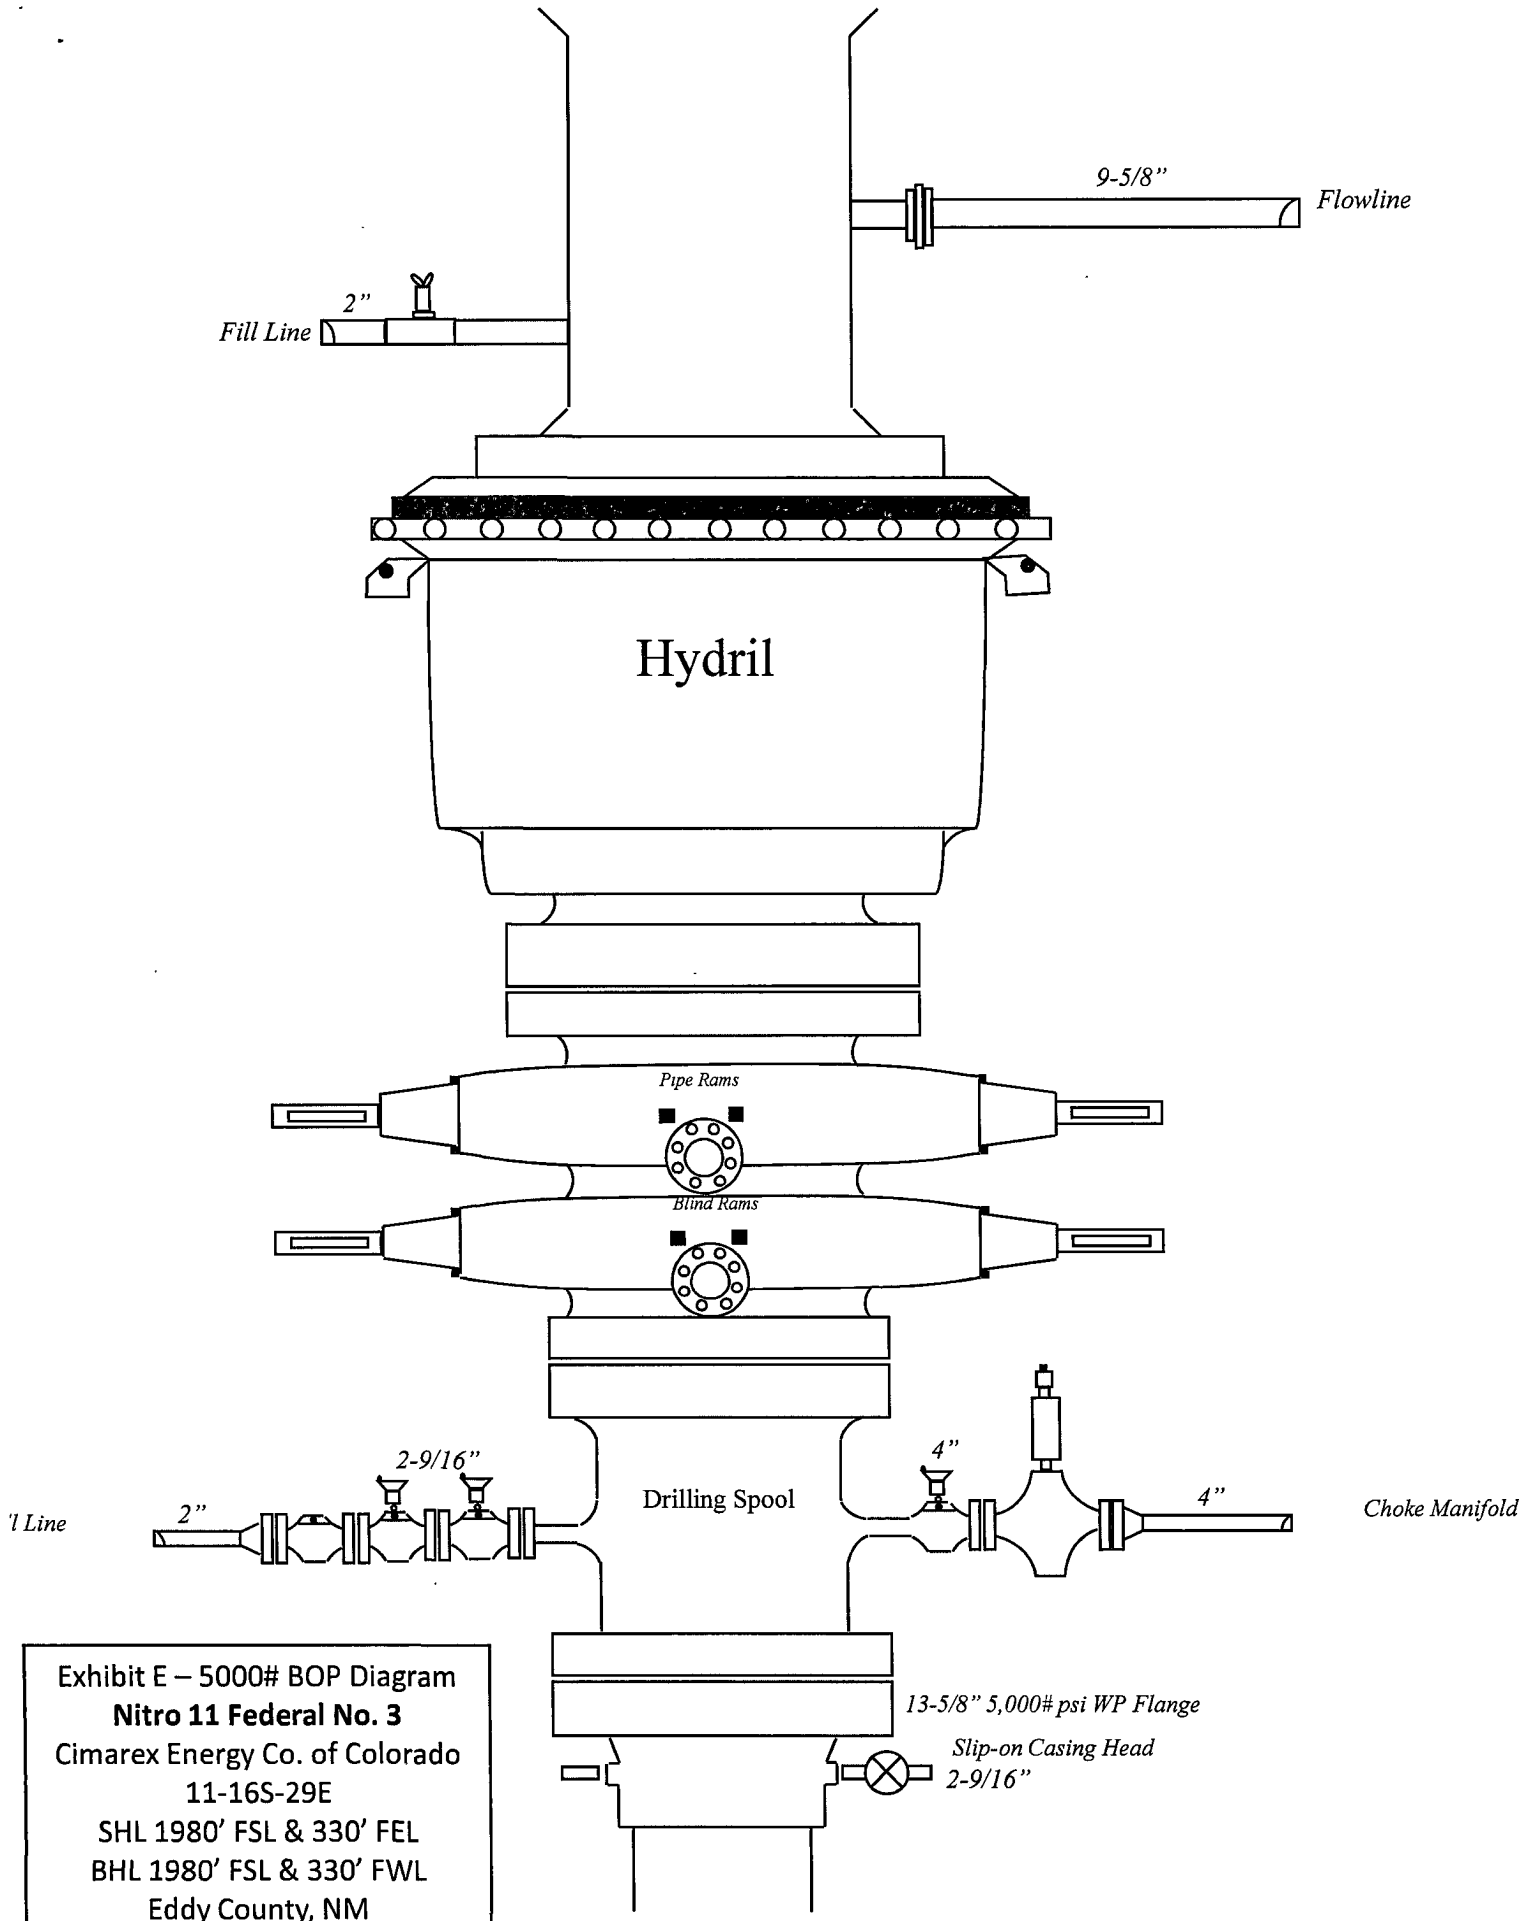

**DRILLING OPERATIONS
CHOKE MANIFOLD
5M SERVICE**

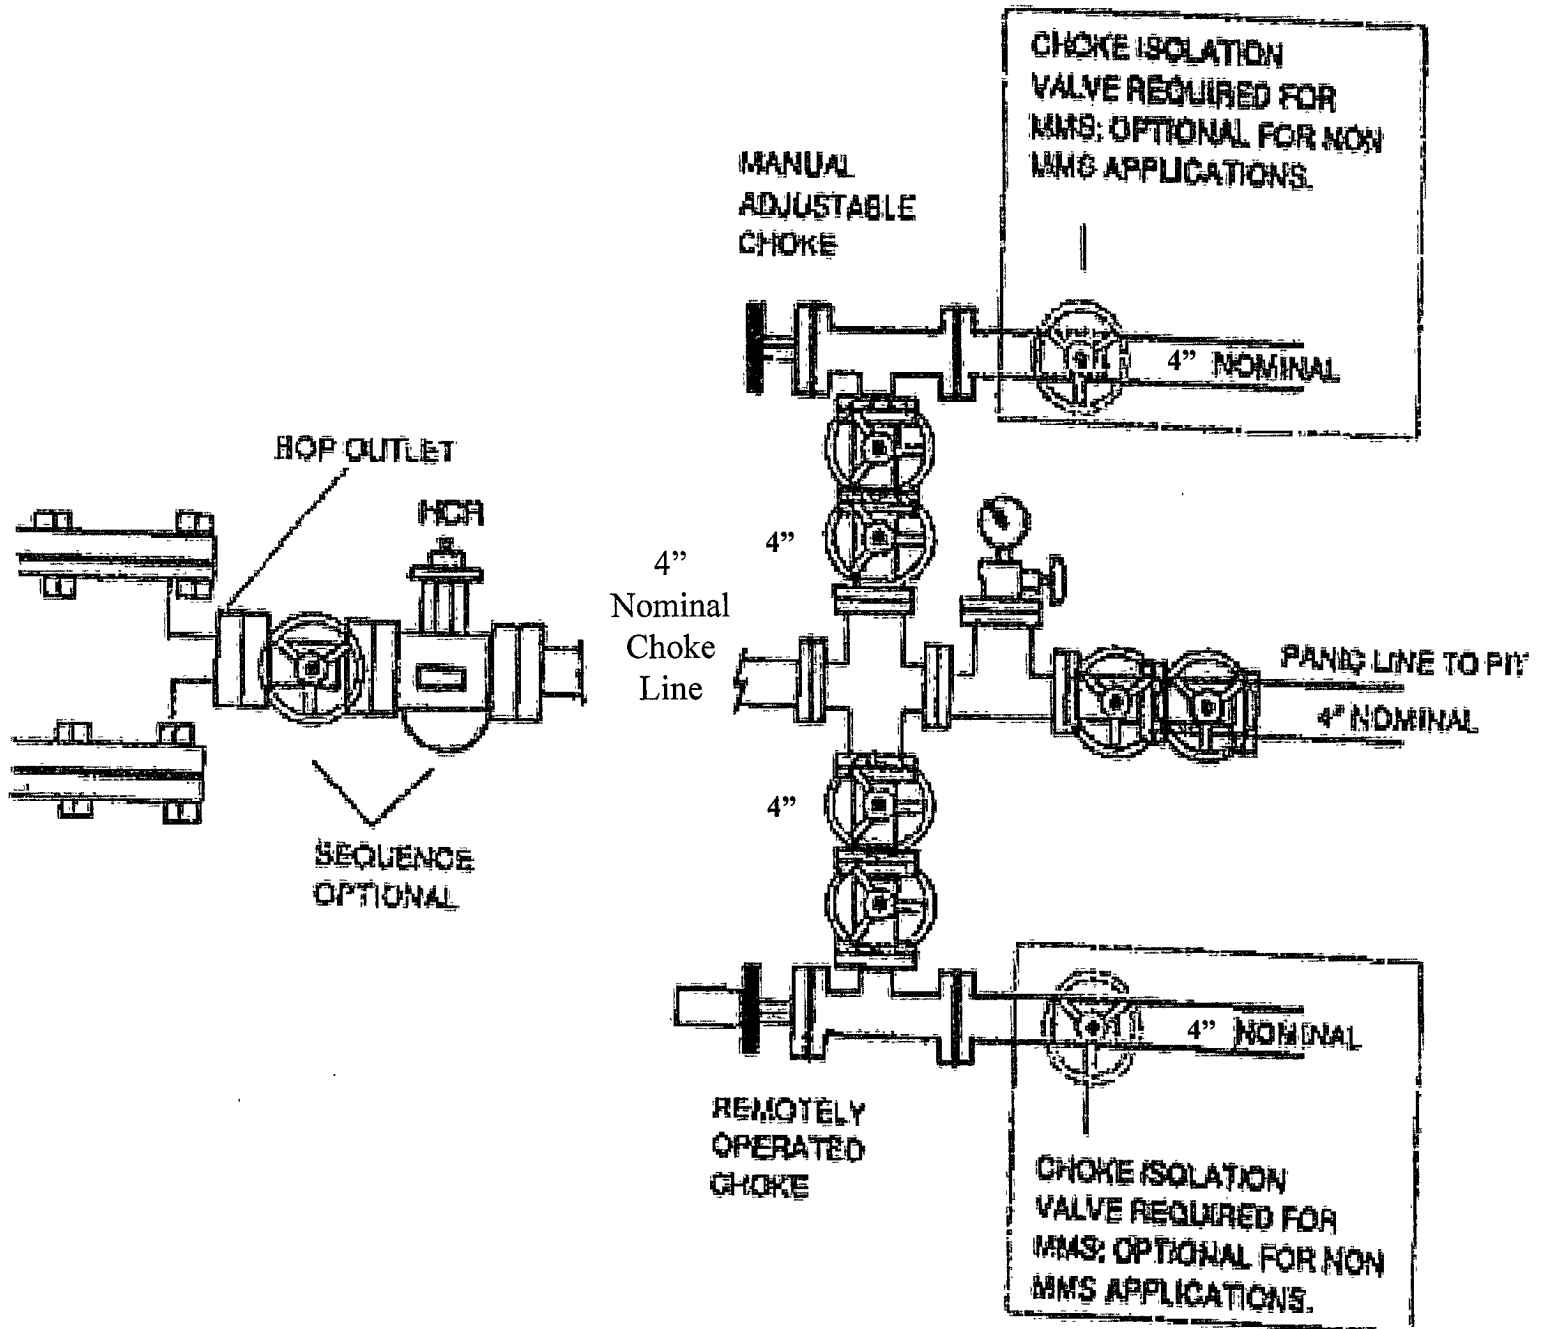


Exhibit E-1 – Choke Manifold Diagram
Nitro 11 Federal No. 3
 Cimarex Energy Co. of Colorado
 11-16S-29E
 SHL 1980' FSL & 330' FEL
 BHL 1980' FSL & 330' FWL
 Eddy County, NM

Hydrogen Sulfide Drilling Operations Plan
Cimarex Energy Co. of Colorado
Nitro 11 Federal No. 3
Unit I, Section 11
T16S-R29E, Eddy County, NM

- 1 All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
- 2 H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of flow line (mud pit) and on derrick floor or doghouse.
- 3 Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
- 4 Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag indicates normal safe condition. Yellow flag indicates potential pressure and danger. Red flag indicates danger (H₂S present in dangerous concentration). Only emergency personnel admitted to location.
- 5 Well control equipment
 - A. See exhibit "E"
- 6 Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
- 7 Drillstem Testing

No DSTs or cores are planned at this time.
- 8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
- 9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

H₂S Contingency Plan
Nitro 11 Federal No. 3
Cimarex Energy Co. of Colorado
Unit I, Section 11
T16S-R29E, Eddy County, NM

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- ★ Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- ★ Evacuate any public places encompassed by the 100 ppm ROE.
- ★ Be equipped with H₂S monitors and air packs in order to control the release.
- ★ Use the "buddy system" to ensure no injuries occur during the response.
- ★ Take precautions to avoid personal injury during this operation.
- ★ Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- ★ Have received training in the:
 - ◆ Detection of H₂S, and
 - ◆ Measures for protection against the gas,
 - ◆ Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air=1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air=1	2 ppm	N/A	1000 ppm

Contacting Authorities

Cimarex Energy Co. of Colorado's personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Cimarex Energy Co. of Colorado's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

H₂S Contingency Plan Emergency Contacts
Nitro 11 Federal No. 3
 Cimarex Energy Co. of Colorado
 Unit I, Section 11
 T16S-R29E, Eddy County, NM

Company Office

Cimarex Energy Co. of Colorado	800-969-4789
Co. Office and After-Hours Menu	

Key Personnel

Name	Title	Office	Mobile
Doug Park	Drilling Manager	972-443-6463	972-333-1407
Dee Smith	Drilling Super	972-443-6491	972-882-1010
Jim Evans	Drilling Super	972-443-6451	972-465-6564
Dorsey Rogers	Field Super		505-200-6105
Roy Shirley	Field Super		432-634-2136

Artesia

Ambulance	911
State Police	575-746-2703
City Police	575-746-2703
Sheriff's Office	575-746-9888
Fire Department	575-746-2701
Local Emergency Planning Committee	575-746-2122
New Mexico Oil Conservation Division	575-748-1283

Carlsbad

Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-887-3798
Local Emergency Planning Committee	575-887-6544
US Bureau of Land Management	575-887-6544

Santa Fe

New Mexico Emergency Response Commission (Santa Fe)	505-476-9600
New Mexico Emergency Response Commission (Santa Fe) 24 Hrs	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

National

National Emergency Response Center (Washington, D.C.)	800-424-8802
---	--------------

Medical

Flight for Life - 4000 24th St.; Lubbock, TX	806-743-9911
Aerocare - R3, Box 49F; Lubbock, TX	806-747-8923
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM	505-842-4433
SB Air Med Service - 2505 Clark Carr Loop S.E.; Albuquerque, NM	505-842-4949

Other

Boots & Coots IWC	800-256-9688	or	281-931-8884
Cudd Pressure Control	432-699-0139	or	432-563-3356
Halliburton	575-746-2757		
B.J. Services	575-746-3569		

Surface Use Plan
Cimarex Energy Co. of Colorado
Nitro 11 Federal No. 3
Unit I, Section 11
T16S-R29E, Eddy County, NM

- 1 Existing Roads: Area maps, Exhibit "B" is a reproduction of Eddy Co. General Highway Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing roads and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
 - A. Exhibit "A" shows the proposed well site as staked.
 - B. From junction of Mallett and Hagerman Cutoff, go West on Mallett for 0.7 miles to lease road. On lease road, go Northwest for approx 5.0 miles to proposed lease road.
- 2 Planned Access Roads: 1193' of on-lease access road is proposed.
- 3 Location of Existing Wells in a One-Mile Radius - Exhibit A
 - A. Water wells - None known
 - B. Disposal wells - None known
 - C. Drilling wells - None known
 - D. Producing wells - As shown on Exhibit "A"
 - E. Abandoned wells - As shown on Exhibit "A"
- 4 If on completion this well is a producer, Cimarex Energy Co. of Colorado will furnish maps and/or plats showing on site facilities or off site facilities if needed. This will be accompanied by a Sundry Notice.
- 5 Location and Type of Water Supply:

Water will be purchased locally from a commercial source and trucked over the access roads or piped in flexible lines laid on top of the ground.
- 6 Source of Construction Material:

If possible, construction will be obtained from the excavation of drill site. If additional material is needed, it will be purchased from a local source and transported over the access route as shown on Exhibit "C".
- 7 Methods of Handling Waste Material:
 - A. Drill cuttings will be separated by a series of solids removal equipment and stored in steel containment pits and then hauled to a state-approved disposal facility.
 - B. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary land fill.
 - C. Salts remaining after completion of well will be picked up by supplier including broken sacks.
 - D. Sewage from living quarters will drain into holding tanks and be cleaned out periodically. A Porta-John will be provided for the rig crews. This equipment will be properly maintained during the drilling operations and removed upon completion of the well.
 - E. Drilling fluids will be contained in steel pits in a closed circulating system. Fluids will be cleaned and reused. Water produced during testing will be contained in the steel pits and disposed of at a state approved disposal facility. Any oil or condensate produced will be stored in test tanks until sold and hauled from the site.

Surface Use Plan
Cimarex Energy Co. of Colorado
Nitro 11 Federal No. 3
Unit I, Section 11
T16S-R29E, Eddy County, NM

8 Ancillary Facilities:

- A. No camps or airstrips to be constructed.

9 Well Site Layout:

- A. Exhibit "D" shows location and rig layout.
- C. Mud pits in the closed circulating system will be steel pits and the cuttings will be stored in steel containment pits.
- D. Cuttings will be stored in steel pits until they are hauled to a state-approved disposal facility.
- E. If the well is a producer, those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10 Plans for Restoration of Surface:

Rehabilitation of the location will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be recountoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

11 Other Information

- A. Topography consists of a sloping plane with loose tan sands. Vegetation is mainly yucca, mesquite and shin oak.
- B. The wellsite is on surface owned by Department of the Interior, Bureau of Land Management. The land is used mainly for farming, cattle ranching, recreational use, and oil and gas production.
- C. An Archaeological survey will be conducted on the location and proposed roads, and this report will be filed with the Bureau of Land Management in the Carlsbad BLM office.
- D. There are no known dwellings within 1½ miles of this location.

Operator Certification Statement
Cimarex Energy Co. of Colorado
Nitro 11 Federal No. 3
Unit I, Section 11
T16S-R29E, Eddy County, NM

Operator's Representative

Cimarex Energy Co. of Colorado
P.O. Box 140907
Irving, TX 75014
Office Phone: (972) 443-6489
Zeno Farris

CERTIFICATION: I hereby certify that the statements and plans made in this APD are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Cimarex Energy Co. of Colorado and/or its contractors/subcontractors and is in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME: Zeno Farris
Zeno Farris
DATE: March 20, 2008
TITLE: Manager Operations Administration

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Cimarex Energy Co. of Colorado
LEASE NO.:	NM-0556811
WELL NAME & NO.:	Nitro 11 Federal # 3
SURFACE HOLE FOOTAGE:	1980' FSL & 330' FEL
BOTTOM HOLE FOOTAGE:	1980' FSL & 330' FWL
LOCATION:	Section 11, T. 16 S., R 29 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie Chicken
- ☒ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☒ **Road Section Diagram**
- ☒ **Drilling**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment/Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Mitigation Measures: The mitigation measures include the Pecos District Conditions of Approval, and the standard stipulation for permanent resource roads. Stipulations for lesser prairie-chickens also apply:

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken: Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Nitro 11 Federal # 3: Pit North V-Door East

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (505) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

C. Closed Loop System

Nitro 11 Fed. # 3: Closed Loop System V-Door East

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.

Payment shall be made to the BLM prior to removal of any additional federal mineral materials from any site other than the reserve pit. Call the Carlsbad Field Office at (505) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

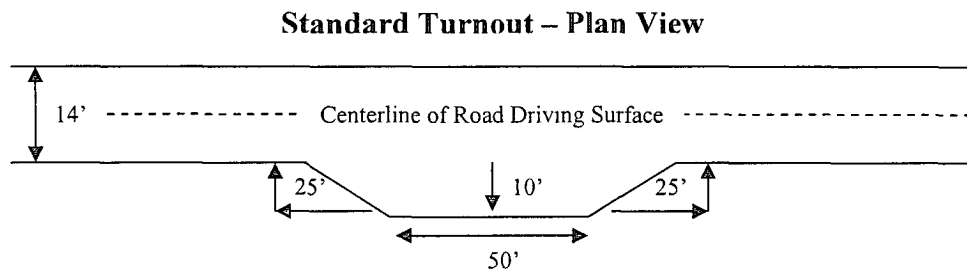

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

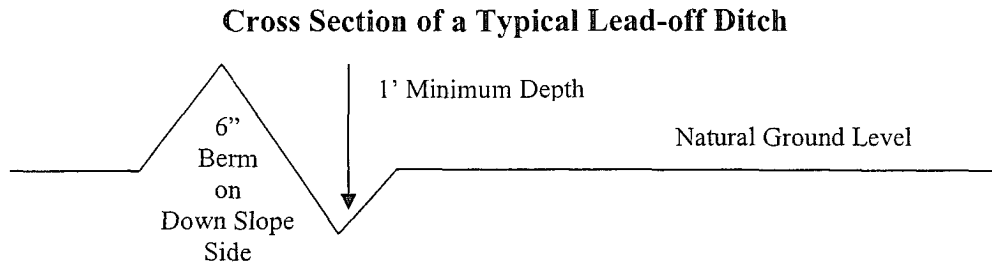

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Culvert Installations

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

Fence Requirement


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

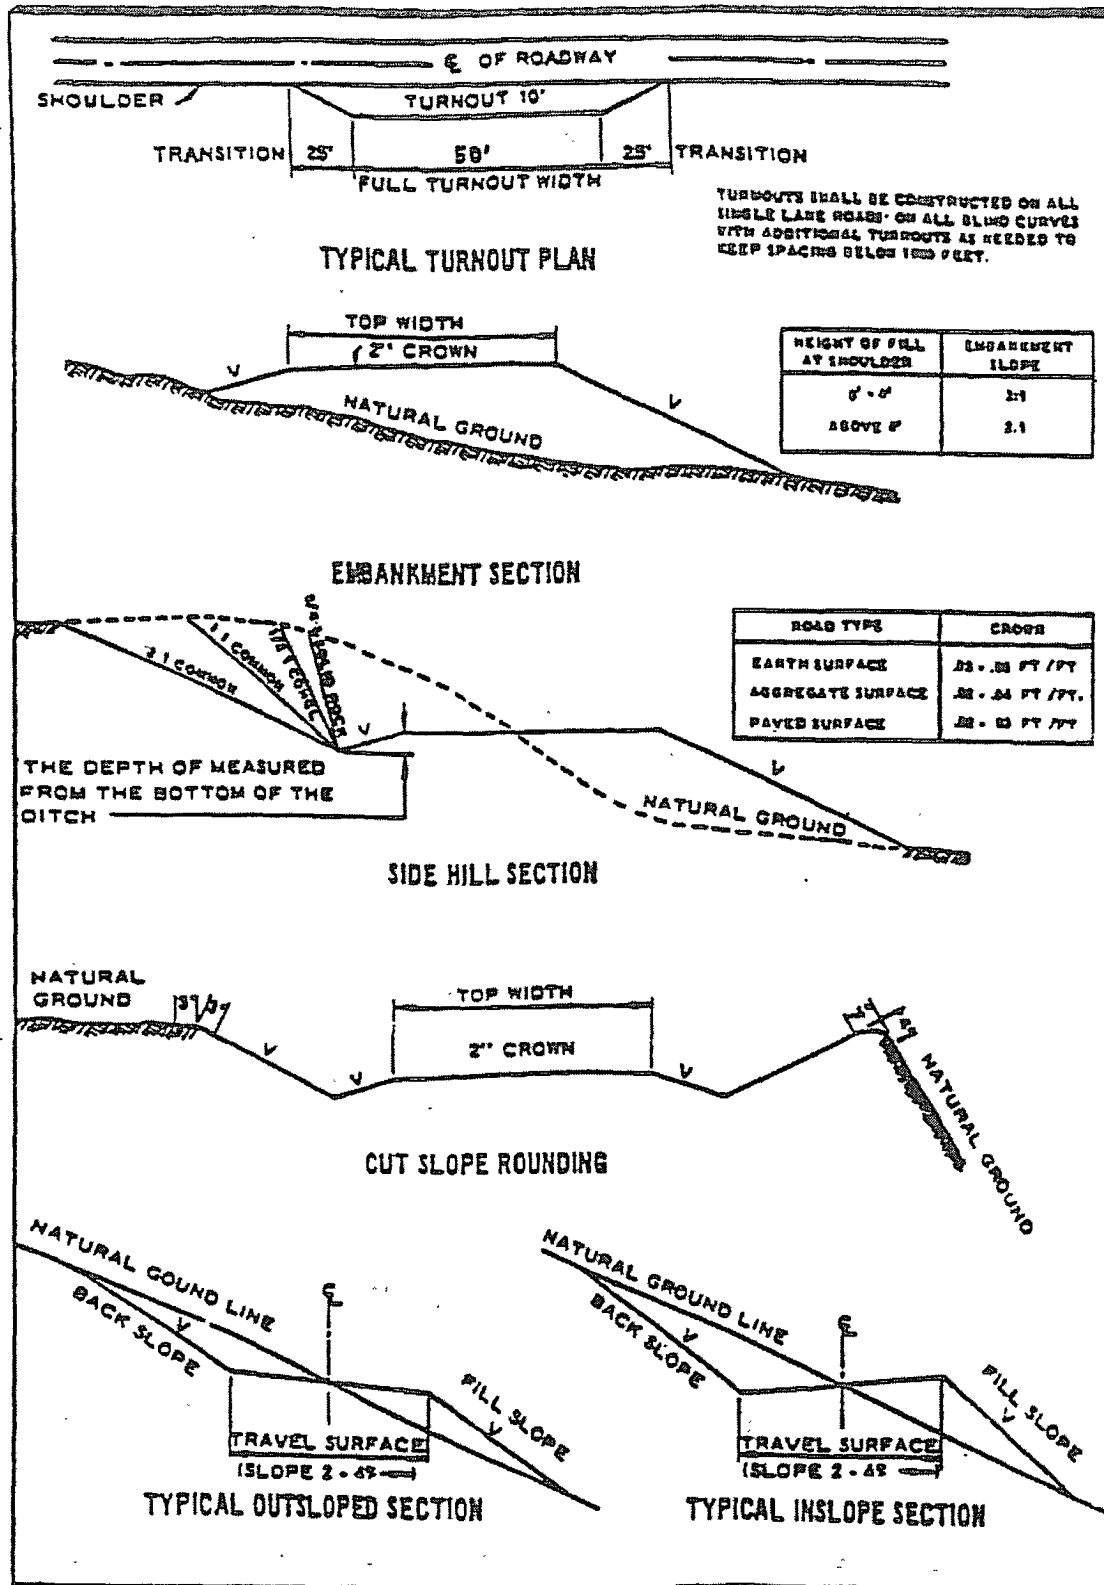

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified a minimum of 4 hours in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOPE tests

☒ **Chaves and Roosevelt Counties, T16S Eddy County**
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
(575) 627-0205 and (575) 361-2822.

1. **Although Hydrogen Sulfide has not been reported in this section, it is always a possible hazard. If Hydrogen Sulfide is encountered, please report measured amounts and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

B. CASING

Changes to the approved APD casing and cement program require submitting a sundry and receiving approval prior to work.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string.

Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compression strength, whichever is greater. (This is to include the lead cement).

WOC for water basin or potash applies to entire wellbore.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possible lost circulation in the Grayburg and San Andres formations.

Possible high pressure gas bursts from the Wolfcamp formation – applicable to pilot hole.

1. The 13-3/8 inch surface casing shall be set **at approximately 400 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt)** and cemented to the surface. **If the salt is penetrated, set casing 25' above the salt. Fresh water mud to setting depth.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement).
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

☒ Cement to surface. If cement does not circulate see B.1.a-d above.

Formation below the 9-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i.

3. The minimum required fill of cement behind the 7 inch production casing is:

☒ Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.

Formation below the kick off point to be tested according to Onshore Order 2.III.B.1.i.

Tag cement at bottom of pilot hole and report on subsequent report.

NOTE: Pilot hole will require proper plug when well is plugged.

4. The minimum required fill of cement behind the 4-1/2 inch production casing is:

- ☒ Not required as operator is using Peak Iso-Pak liner. **Seal on Peak Systems Iso-Pack liner is to be tested per Onshore Oil and Gas Order 2.III.B.1.b. Please call BLM for witness of seal test.**

5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. The tests shall be done by an independent service company.
 - b. The results of the test shall be reported to the appropriate BLM office.
 - c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.
 - e. A variance to test only the surface casing to the reduced pressure of 1000 psi with the rig pumps is approved. **The BOP will be tested to 5000 psi by an independent service company.**

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

WWI 052608

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Containment Structures

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color
Shale Green, Munsell Soil Color Chart # 5Y 4/2

B. PIPELINES

C. ELECTRIC LINES

IX. INTERIM RECLAMATION & RESERVE PIT CLOSURE

A. INTERIM RECLAMATION

If the well is a producer, interim reclamation shall be conducted on the well site in accordance with the orders of the Authorized Officer. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed
(Insert Seed Mixture Here)

X. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS

Upon abandonment of the well and/or when the access road is no longer in service the Authorized Officer shall issue instructions and/or orders for surface reclamation and restoration of all disturbed areas.

On private surface/federal mineral estate land the reclamation procedures on the road and well pad shall be accomplished in accordance with the private surface land owner agreement.