

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-ARTESIA

AUG 10 2009

FORM APPROVED
OMB No 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1 Type of Well ☒ Oil Well ☐ Gas Well ☐ Other

2 Name of Operator NADEL AND GUSSMAN HEYCO, LLC

3a Address
PO BOX 1936 ~ ROSWELL NM 88202-1936

3b Phone No. (include area code)
505/623/6601

4 Location of Well (Footage, Sec., T, R, M, or Survey Description)

1697' FSL & 1600' FEL, Sec. 13: T18S, R31E

5 Lease Serial No
NMNM-106718

6 If Indian, Allottee or Tribe Name

7 If Unit or CA/Agreement, Name and/or No

8. Well Name and No.
South Taylor 13 Federal #5

9. API Well No.
30-015-37092

10. Field and Pool, or Exploratory Area
East Shugart Delaware

11. County or Parish, State
Eddy, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Casing and Cmt report
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

- 13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

BLM Bond No. NMB000520
Surety Bond No. B004230

7/12/09 TD 11" hole at 940' ran 8 5/8" float shoe, 1 jts 8 5/8" 24# J-55 LTC csg. 8 5/8" float collar, 22 jts 8 5/8" 24# J-55 STC csg. Tagged at 940' no fill. Set bottom of csg at 939'.

Centralizers placed @ 897.75, 855.85, 814.90, 774.00, 619.23. Cementing data completed by Schlumberger.

1st stage: 20 bbls fw, lead: 165 sx, C+4% D20+0.2% D46+2% s1, @ 12.90 ppg, 1.97 cf/sx yield, 10.87 gal/sx. Tail: 200 sx C Neat @ 14.80 ppg, 1.34 cf/sx yield, 6.36 gal/sx

Displacement: displaced w/57.2 bbls f/w. bump plug w/500 psi @ 4:57 pm. Circulated 165 sx to pit.

See Attachment "A"
7/20/09

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Tommy Link

Signature

Title Production Analyst

Date

07/24/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

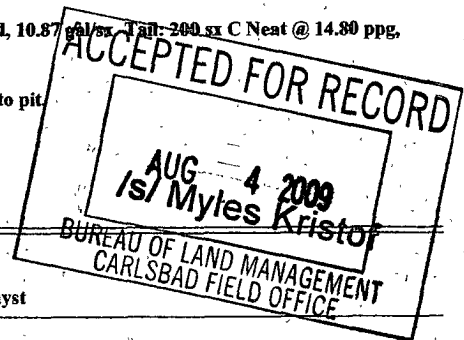

Attachment "A"

7/20/09 – TD 5500' 7 7/8" hole at 5500' ran 5 ½ float shoe, 2 jts 5 ½" 17# J-55 LTC Csg. 5 1/2 " float collar, 80 jts 5 ½" 17# J-55 LTC csg. DV Tool and 60 JTs 5 ½ 17" J-55 LTC. Tagged at 5500' no fill.

Centralizers placed @ 5457.42, 5417.86, 5377.26, 5298.49, 5221.67, 5144.95, 5067.92, 4988.21, 4288.69, 4210.48. Cementing data completed by Schlumberger.

1st stage: 20 bbls fw, 830 sx Cement TXI Liteweight, + 1.3% D44 (BWOW)+0.2% D13+0.2%D65+0.2%D167+0.125 PPSD130+0.2%D46. 13.0 lb/gal, yield 1.41, Mix water 7.07 ft 3/sk. Plug dn @ 1:00 p.m. 7/21/09, open dv tool and circ 250 sx to pit.

2nd stage: 20 bbls fw, 900 sx Class H,+0.3% D65=0.2% D167+0.2%D46+0.1% D13, 16.40 lb/gal, yield 1.07, mix water 4.36 ft3/sk. Circ 188 sx to pit. Plug dn @ 2:08 am 7/22/09.