

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
June 19, 2008

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. <b>30-015-02655</b>
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. <b>E - 7179</b>
7. Lease Name or Unit Agreement Name <b>West Artesia Grayburg Unit</b>
8. Well Number <b>11</b>
9. OGRID Number <b>261198</b>
10. Pool name or Wildcat <b>Artesia-Qn-GB-SA</b>

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other <u>Water Injection</u>	
2. Name of Operator <b>Doral Energy Corp.</b>	
3. Address of Operator <b>415 W. Wall Street, Suite 500 Midland, TX 79701</b>	
4. Well Location Unit Letter <u>K</u> : <u>1650</u> feet from the <u>South</u> line and <u>1650</u> feet from the <u>West</u> line Section <u>8</u> Township <u>18S</u> Range <u>28E</u> NMPM <u>Eddy</u> County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <b>3603' GR</b>	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

P & A as follows:

- All portions of well not filled with cement are to be filled with mud.
- Verify perforations with CCL log. Set CIBP  $\pm 25'$  above top perfs (anticipated to be @ 2,190'; perfs 2,218' - 2,272'). Cap CIBP with 35' cement 35' cement
- Determine freepoint on 5-1/2" 15.5# casing. Cut & pull free casing. Est. to be 1,500'
- Spot cement plug from 1,350' to 1,550' (150' above stub & 50' inside stub). 80X Tag
- Spot 100' cement plug from 1,100' - 1,200'. 50 X - Perf + Squeez. WOC Tag
- Spot 200' cement plug from 400' - 600' (100' above & 100' below casing shoe). 100X Tag - Perf + Squeez
- Perf casing @ 350' and circ cement to surface. 100X - Tag
- Spot cement plug from 50' to surface. 25X 60'
- Set P & A marker and clean up location.

**Notify OCD 24 hrs. prior  
to any work done.**

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Vice President of Operations DATE 10/06/2009

Type or print name C.M. Bloodworth, P.E. E-mail address: martyb@doralenergy.com PHONE: 432/789-1180  
For State Use Only

APPROVED BY: [Signature] TITLE Approval Granted providing work is complete by 1/20/09 DATE 10/20/09  
Conditions of Approval (if any):

Lease/Well No.	WAGU # 11 WIW	ELEVATION	KB
Location	1650' FSL & 1650' FWL		GL 3603'
	K, SEC 8, T18S, R28E	FIELD	ARTESIA; Q.GB,SA
	EDDY CO, NM		
LEASE NO	TRACT 5 - E 7179	Spudded	12/12/58
API No.	30-015-02655	Completed	01/17/58

LAT  
LONG

10" HOLE

8 5/8" 24# J-55  
CSG W/ MUD


8" HOLE

expected 159  
cut @ 1500'

ToC est  
@ 1767'

CIBPO  
± 2190' w/ 35' cut

5 1/2", 15.5 #  
CSGW/100SX

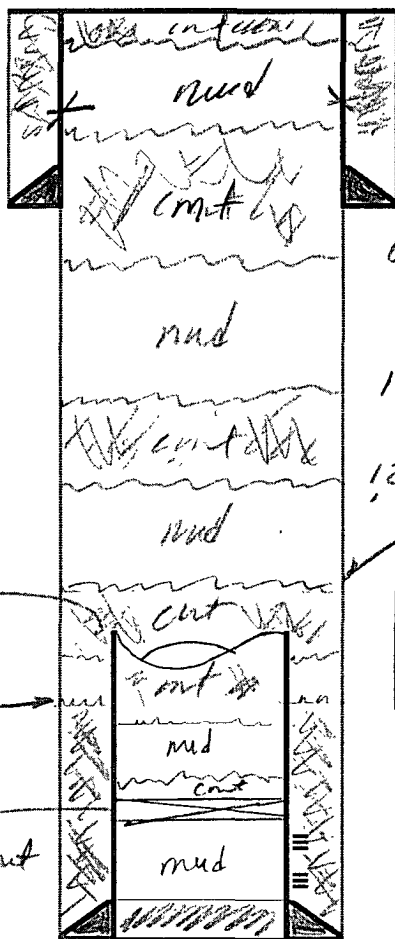

25' x  
Port 350'  
400' cut  
500' 100X  
600' (100' inside  
100' below  
Shoe)  
1100' 50X perf. + 5922' woc Tag  
1200' cut 1350 - 1550' (80X; 150' above Stub, 50'  
inside stub) Tag

TOPS	FT
YATES	492
SVN RIVERS	810
BOWERS	
QUEEN	1,456
GRAYBURG	1,998
SAN ANDRES	2,287

Sundry notice of **INTENT** to perf. &  
frac. 1900' to 1996' - **NO** Sundry of  
work performed

PACKER @ 2113.27'  
PERFS  
2218' - 2228' 40 HOLES  
2256' - 2272' 48 HOLES  
CSG @ 2305'

CMB 10/05/25