

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N French Dr, Hobbs, NM 88240  
District II  
1301 W Grand Ave, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd, Aztec, NM 87410  
District IV  
1220 S St Francis Dr, Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103

June 19, 2008

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.

30-015-31552

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B-5862

7. Lease Name or Unit Agreement Name

AID 24P State

8. Well Number 23

9. OGRID Number

255333

10. Pool name or Wildcat

San Adres/Yeso

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Lime Rock Resources A, L.P.

3. Address of Operator

Heritage Plaza, 1111 Bagby St. Suite 4600, Houston, TX 77002

4. Well Location

Unit Letter: K: 1,860 feet from the South line and 1,650 feet from the West line

Section 24 Township 17S Range 28E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3,697' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: TEMPORARILY ABANDON ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Current Condition:

8-5/8", 24#, J-55 Casing set @ 639'. Cemented with 550 sxs to surface.

5-1/2", 15.5#, K-55 Casing set @ 4,237'. Cemented with 745 sxs to surface.

Perfs: 2,596-3,197'

Temporarily Abandon well as follows:

10/02/2009:

Received verbal permission from Richard Inge w/ NM OCD to begin work. Pulled rods, pump, and tubing.

10/09/2009:

Set CIBP @ 3,730' with 35' cement on top of plug to abandon Glorieta & Yeso. Set CIBP @ 2,550' with 35' cement on top of plug to temporarily abandon San Andres. Circulate casing with salt water and pull out of hole with tubing. Install tubing sub and valve.

10/13/2009:

RU pump truck w/ pressure recorder. Conduct MIT to 550# for 30 minutes. Held pressure with no leak. Submitted original chart to NM OCD.

Well TA'd on 10/13/2009.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

C. Tim Miller

TITLE Vice President - Operations

DATE 10/15/2009

Type or print name C. Tim Miller

E-mail address: tmiller@limerockresources.com

PHONE: (713) 292-9514

For State Use Only

APPROVED BY:

Richard Inge

TITLE COMPLIANCE OFFICER


DATE 10/21/09

Conditions of Approval (if any):



LIME ROCK  
RESOURCES

## WELLBORE AFTER COMPLETION OF TA OPERATIONS

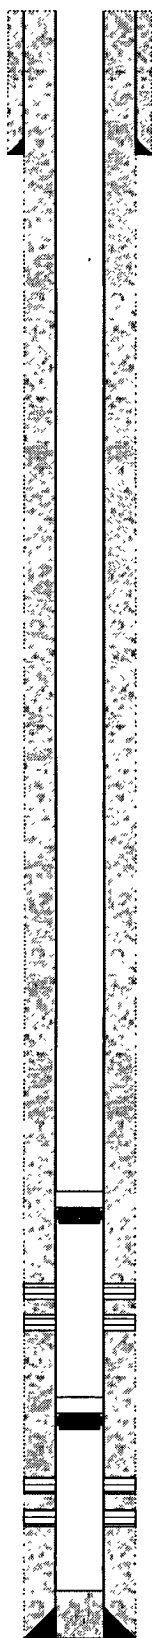

8-5/8", 24#, K-55, ST&C Casing @ 639'

**CIBP set @ 2,550' w/ 35' cement on top of plug**

San Andres Perfs: 2,596-3,197' (35 holes)

**CIBP set @ 3,730' w/ 35' cement on top of plug**

Yeso Perfs: 3,768-08' & 3,872-70' (4 SPF)

PBTD @ 4,155'

5-1/2"; 15.5#; K-55; ST&C Casing @ 4,250'

TD @ 4,280'

Lime Rock Resources  
AID 24P State 23  
Sec 24-17S-28E  
Eddy County, NM