

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-ARTESIA

FORM APPROVED
OMB No 1004-0135
Expires January 31, 2004

Rm

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Mewbourne Oil Company 14744

3a. Address 3b. Phone No. (include area code)

PO Box 5270 Hobbs, NM 88241

575-393-5905

4. Location of Well (Footage, Sec, T, R, M, or Survey Description)

660' FSL & 1730' FEL, Sec 1-T17S-R29E Unit Letter O

5. Lease Serial No.

NM-7752

6. If Indian, Allotted or Title Name

RECEIVED

7. If Unit or CA Agreement, Name and No.

NM OCD ARTESIA

8. Well Name and No.

Skyhawk 1 Fed Com #1

9. API Well No

10. Field and Pool, or Exploratory Area

Grayburg Morrow

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Spud, csg & TD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

3. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

02/16/10 MI & Rig up Patterson/UTI #45. At 5:00 pm on 02/16/10 begin daywork operations. Tested BOPE to 5000# & annular to 2500#. At 12:00 am 02/18/10, tested csg to 1500# for 30 minutes, held OK. Charts and schematic attached. Re-entered & drilled out cmt plugs with 7 7/8" bit.

02/20/10 TD'ed 7 7/8" hole @ 11225'. Ran 11225' 4 1/2" 11.6# HCP110 LT&C Csg. Cemented with 1500 sks BJ Lite Class "H" (50:50:10) with additives. Mixed @ 11.7 #/g w/ 2.54 yd. Tail with 500 sks Class "H" w/additives. Mixed @ 15.1 #/g w/ 1.29 yd. Plug down @ 6:30 pm 02/22/10. Circ 125 sks cmt to pit. At 6:30 pm 02/22/10, tested casing to 3200# for 30 minutes, held OK.

02/23/10...Released rig at 8:00 am.

02/28/10...Ran CBL, CCL & GR. Found TOC at surface.

ACCEPTED FOR RECORD

MAR 6 2010

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Jackie Lathan

Title Hobbs Regulatory

BUREAU OF LAND MANAGEMENT
CARLSBAD FIELD OFFICE

Signature

Date 03/02/10

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by (Signature)

Name
(Printed/Typed)

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office


Date

Title 18 U S C Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

(Continued on next page)

2010.3.11.10

PRINTED IN U.S.A.

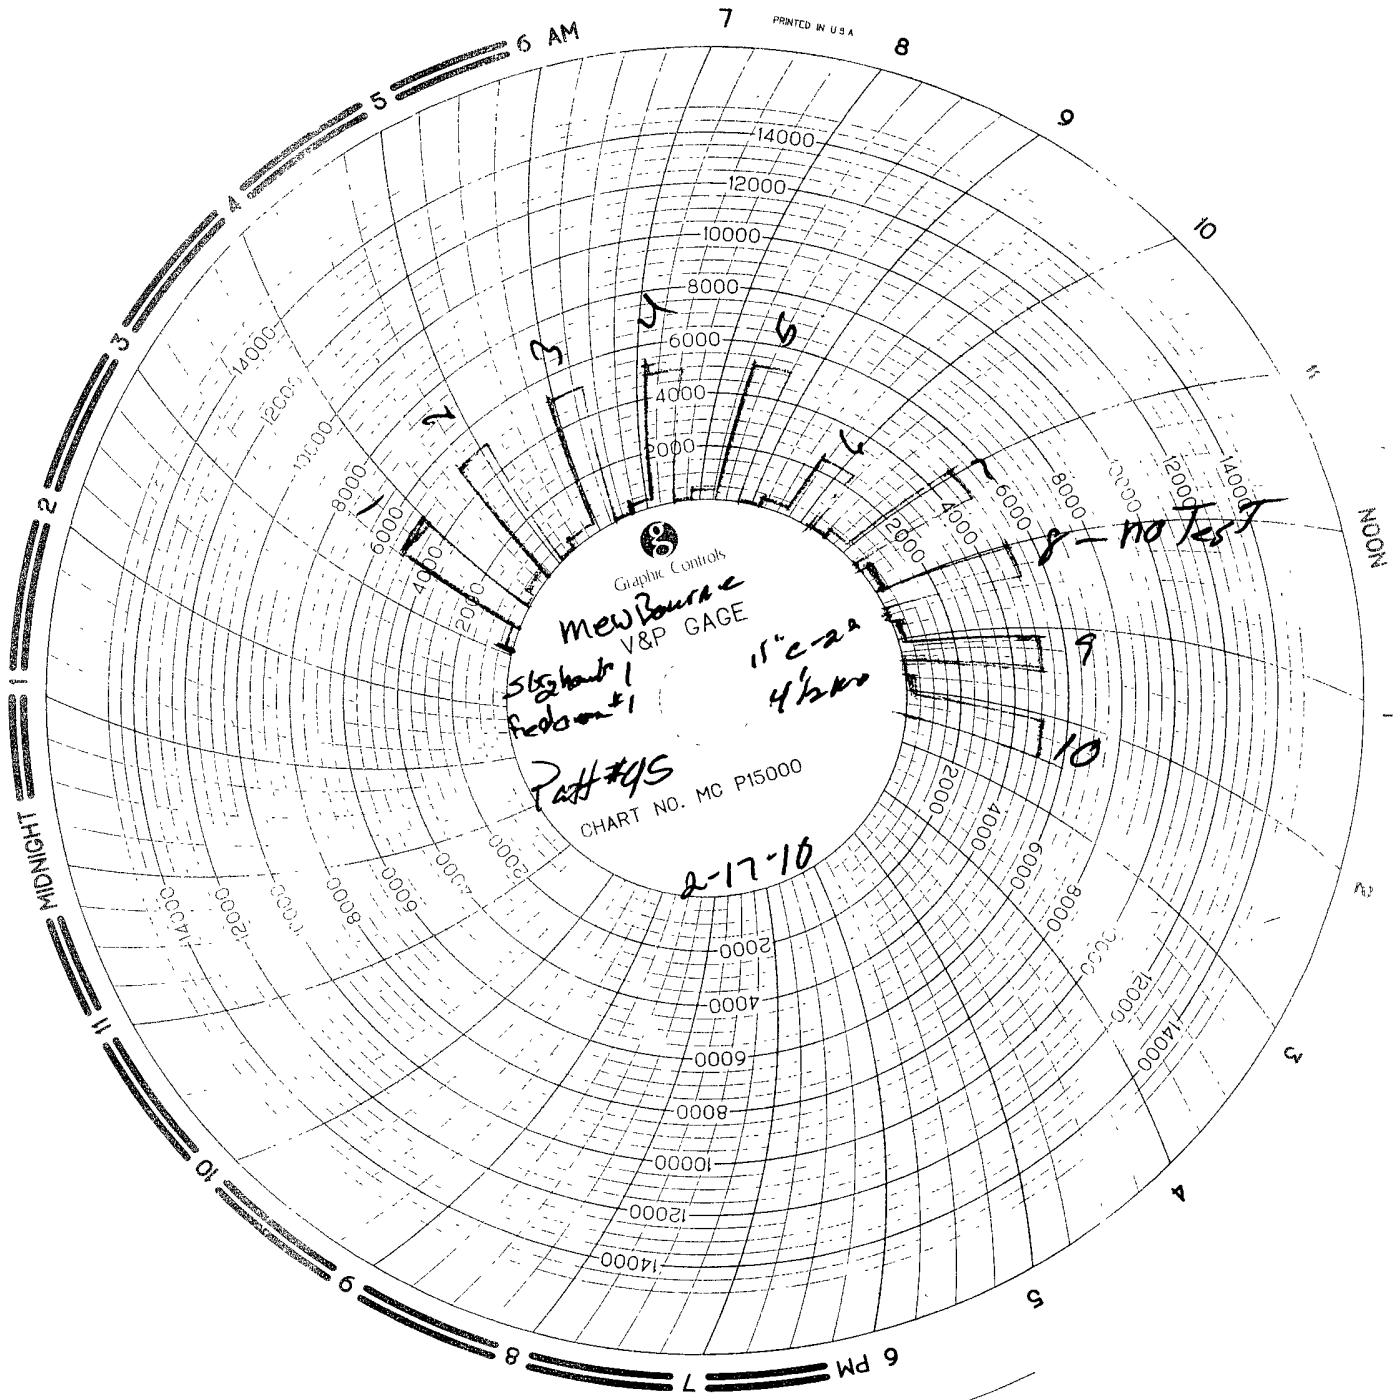

new Bourne
V&P GAGE
562 hwh
Reddon #1
Part #45
CHART NO. MC P15000
2-17-10
11" C-22
4 1/2" W

8 - no test

9

10




MAN WELDING SERVICES

WELDING • BOP TESTING
NIPPLE UP SERVICE • BOP LIFTS • TANDEM
MUD AND GAS SEPARATORS
Lovington, NM • 575-396-4540

INVOICE

BO10772

Company Mewbourne Date 2-17-10 Start Time 2:00 ☒ am ☐ pm
Lease Skyhawk 1 Poolcom County Curry State NM
Company Man Levi
Wellhead Vendor _____ Tester Duke Abner
Drig. Contractor Pact Rig # 4-3
Tool Pusher Rick
Plug Type C-22 Plug Size 11" Drill Pipe Size 4 1/2 x 0
Casing Valve Opened Yes Check Valve Open Yes

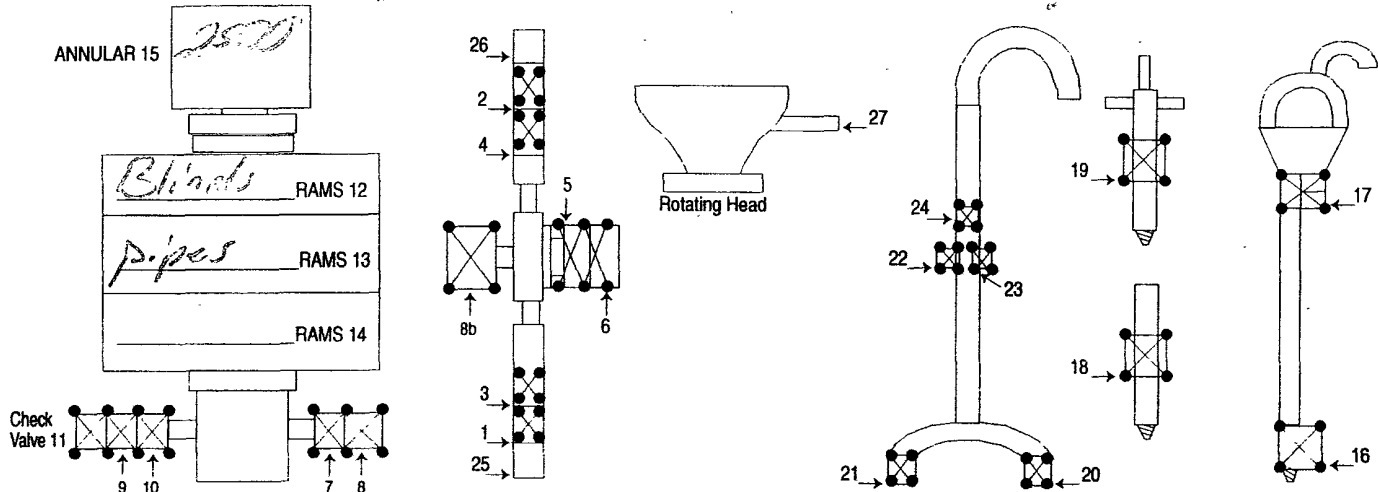

TEST #	ITEMS TESTED	TEST LENGTH	LOW PSI	HIGH PSI	REMARKS
1	12, 5, 25, 6, 26	10 min	250	5000	Flange Leak on ("10") & ("7")
2	12, 10, 1, 5, 2	10 min	250	5000	Flange Leak on Well head
3	12, 11, 3, 5, 4	10 min	250	5000	
4	13, 9, 8	10 min	250	5000	
5	13, 10, 7	10 min	250	5000	
6	15, 10, 7	10 min	250	2500	
7	19	10 min	250	5000	
8	18 no Test	10 min	250	5000	no Test
9	16	10 min	250	5000	
10	17	10 min	250	5000	
Thanks!					
L. J. Abner					

8 HR @ \$1000.00 = \$1000.00
2 HR @ \$185.00 = \$170.00
Mileage 100 @ \$1.00 = \$100.00

Methodical \$100.00

SUB TOTAL \$1370.00
TAX \$ 73.63
TOTAL \$1443.63

MAN WELDING SERVICES, INC

Company Maw Bourne Date 2-17-12
Lease Skyhawk 1 (w/conn #1) County Colony
Drilling Contractor Rob #45 Plug & Drill Pipe Size 11/8" x 22 4/2" ID

Accumulator Function Test - OO&GO#2

To Check - USABLE FLUID IN THE NITROGEN BOTTLES (III.A.2.c.i. or ii or iii)

- Make sure all rams and annular are open and if applicable HCR is closed.
- Ensure accumulator is pumped up to working pressure! **(Shut off all pumps)**
 1. Open HCR Valve. (If applicable)
 2. Close annular.
 3. Close **all** pipe rams.
 4. Open one set of the pipe rams to simulate closing the blind ram.
 5. For 3 ram stacks, open the annular to achieve the 50+ % safety factor. (5M and greater systems).
 6. **Record remaining pressure** 1700 **psi. Test Fails if pressure is lower than required.**
 - a. {950 psi for a 1500 psi system} b. {1200 psi for a 2000 & 3000 psi system }
 7. If annular is closed, open it at this time and close HCR.

To Check - PRECHARGE ON BOTTLES OR SPHERICAL (III.A.2.d.)

- Start with manifold pressure at, or above, maximum acceptable pre-charge pressure:
 - a. {800 psi for a 1500 psi system} b. {1100 psi for 2000 and 3000 psi system}
- 1. Open bleed line to the tank, slowly. **(gauge needle will drop at the lowest bottle pressure)**
 2. Close bleed line. Barely bump electric pump and see what pressure the needle jumps up to.
 3. **Record pressure drop** 1050 **psi. Test fails if pressure drops below minimum.**
- **Minimum:** a. {700 psi for a 1500 psi system} b. {900 psi for a 2000 & 3000 psi system}

To Check - THE CAPACITY OF THE ACCUMULATOR PUMPS (III.A.2.f.)

- Isolate the accumulator bottles or spherical from the pumps & manifold.
- Open the bleed off valve to the tank, {manifold psi should go to 0 psi} close bleed valve.
 1. Open the HCR valve, {if applicable}
 2. Close annular
 3. With **pumps** only, time how long it takes to regain the required manifold pressure.
 4. **Record elapsed time** 1:35 **. Test fails if it takes over 2 minutes.**
 - a. {950 psi for a 1500 psi system} b. {1200 psi for a 2000 & 3000 psi system}