

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised June 10, 2003

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO
30-005-62967

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
V-2925

7. Lease Name or Unit Agreement Name
Trailblazer ANL State

8. Well Number
1

9. OGRID Number
025575

10. Pool name or Wildcat
Southeast Acme San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 S. 4th Street, Artesia, NM 88210

4. Well Location

Unit Letter O : 330' feet from the South line and 1,650' feet from the East line

Section 11 Township 8S Range 27E NMPM Chaves County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify the NMOCD 24 hours before starting the work, MIRU a WSU & any safety equipment as needed. Load the casing w/ 30 +/- BBLS of 2% KCL water. NU the BOP on the wellhead.

2. RIH w/ a string of 2 3/8" tubing to 2,131' & circulate the hole w/ 10.0 ppg brine plugging mud w/ 25 lbs of gel/bbl in the mud & pump a 35sacks cement plug across the San Andres perfs. WOC and tag. ~~Pull the tubing up the hole to~~ pump a 35 sack cement plug across the base of the 8 5/8" casing. ~~Pull the tubing up the hole to 60' & pump a 10 sack cement plug to the surface.~~ * Perf. CSg. @ 508' - Place 100' of Cmt. inside & outside of CSg. 408-508' - TAG

3. Remove all surface equipment & weld dry hole marker per regulations.

* Perf. CSg. @ 60' - Place 60' of Cmt. inside & outside of CSg. 0-60'

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE: Su'Ann Rogers TITLE: Production Clerk DATE: 2/3/04

Type or print name Su'Ann Rogers

E-mail address:

Telephone No. 505-748-1471

(This space for State use)

APPROVED BY

TITLE

DATE

FEB 5 2004

Conditions of approval, if any:

San Andres

WELL NAME: Trailblazer ANL State #1 **Field:** Acme ~~San~~ Andres, South East

LOCATION: Unit O, Sec 11, T8S-27E 330' FSL & 1650' FEL Chaves County


GL: 3929' **ZERO:** **KB:**

SPUD DATE: 7/5/93 **COMP DATE:** 10/93

COMMENTS: 30-005-63051

CASING PROGRAM

8 5/8" 24# J-55	458'
4 1/2" 10.5# J-55	2160'

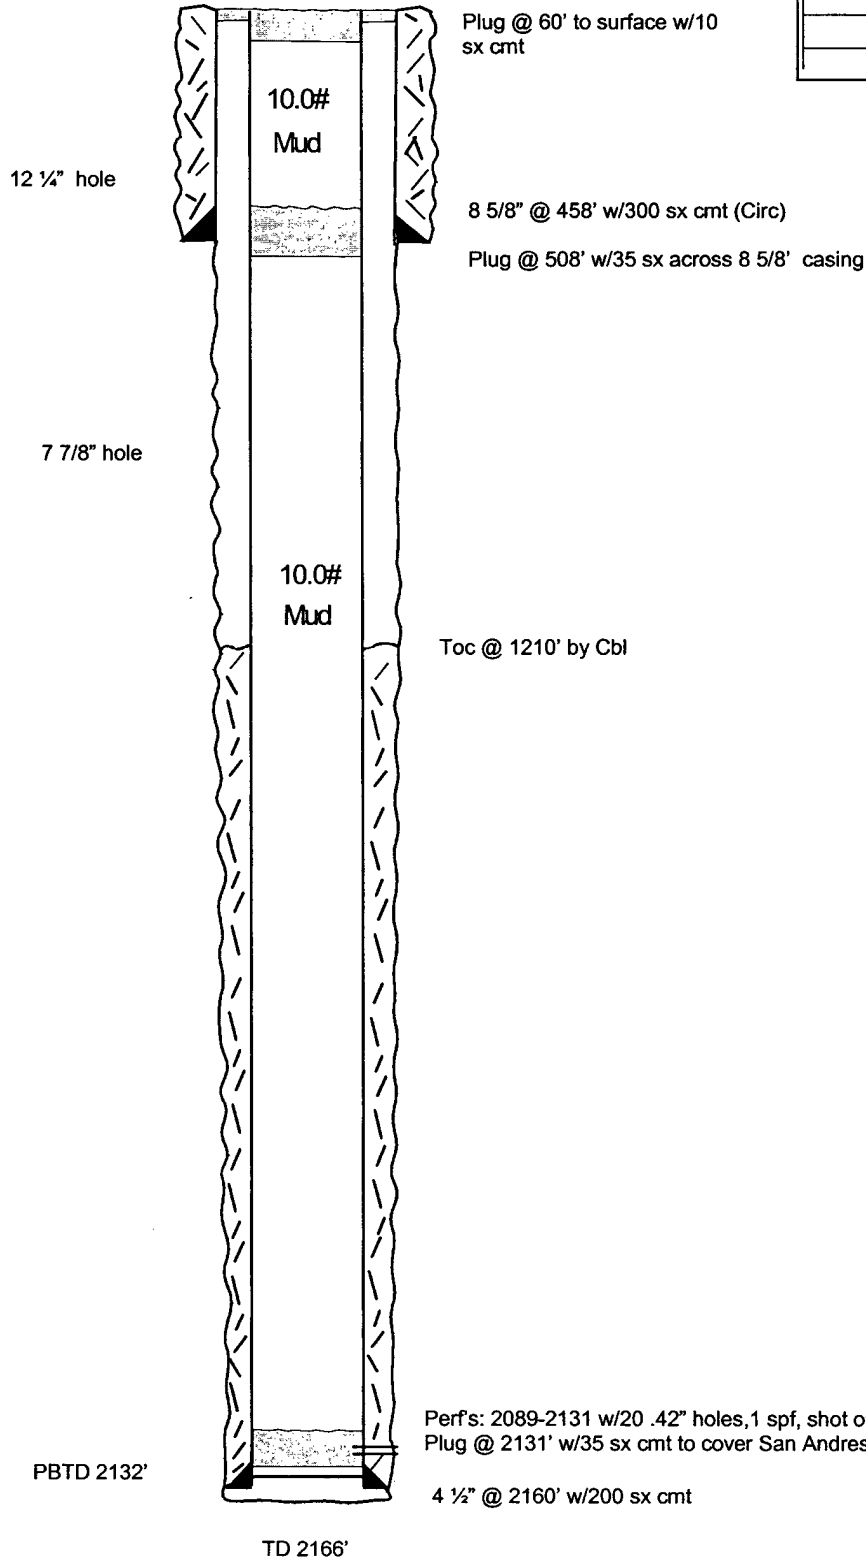

Not to Scale
Cam
02/3/04