

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-015-23564

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name
Bradshaw

8. Well Number

1

9. OGRID Number
025575

10. Pool name or Wildcat
Penasco Draw; Upper Penn

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South Fourth Street, Artesia, NM 88210

4. Well Location

Unit Letter P : 660 feet from the South line and 660 feet from the East line
Section 4 Township 19S Range 25E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3518'GR

RECEIVED
AUG 25 2010
NMOCD ARTESIA

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

Notify OCD 24 hrs. prior
to any work done.

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU. Rig up any safety equipment as needed. No casing recovery will be attempted as production casing is cemented to surface. POOH with any tubing and packer if any exist.
2. Set a CIBP at 7708' with 35' cement on top.
3. Load hole with plugging mud. Spot a 380' cement plug from 5088'-5468'. This will leave a plug across Wolfcamp top.
4. Load hole with plugging mud. Spot a 380' cement plug from 2274'-2654'. This will leave a plug across the casing splice.
5. Load hole with plugging mud. Spot a 380' cement plug from 919'-1299'. This will leave a plug across intermediate casing shoe. WOC and tag, reset if necessary.
6. Load hole with plugging mud. Spot a 517' cement plug from 517' up to the surface. This will leave a plug across surface casing shoe and act as the surface plug. WOC and tag, reset if necessary.
7. Remove all surface equipment and weld dry hole marker per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE August 24, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168
For State Use Only

APPROVED BY: [Signature] TITLE Approval Granted providing work DATE 8/30/2010
Conditions of Approval (if any): is complete by 11/30/2010

WELL NAME: Bradshaw #1 FIELD: Penasco Draw Upper Penn

LOCATION: 660' FSL & 660' FEL of Section 04-19S-25E Eddy Co., NM

GL: 3,518' ZERO: KB:

SPUD DATE: 01//1981 COMPLETION DATE:

COMMENTS: API No.: 30-015-23564


CASING PROGRAM

| | |
|-------------------|--------|
| 13-3/8" 48# H-40 | 467' |
| 8-5/8" 24# K-55 | 1,249' |
| 4-1/2" 10.5# J-55 | 2,604' |
| 4-1/2" 11.6# N-80 | 6,643' |
| | 9,247' |

Before

TOPS

| | |
|----------|--------|
| Glorieta | 2,044' |
| WC | 5,518 |
| Penn | 7,190' |
| Canyon | 7,612' |

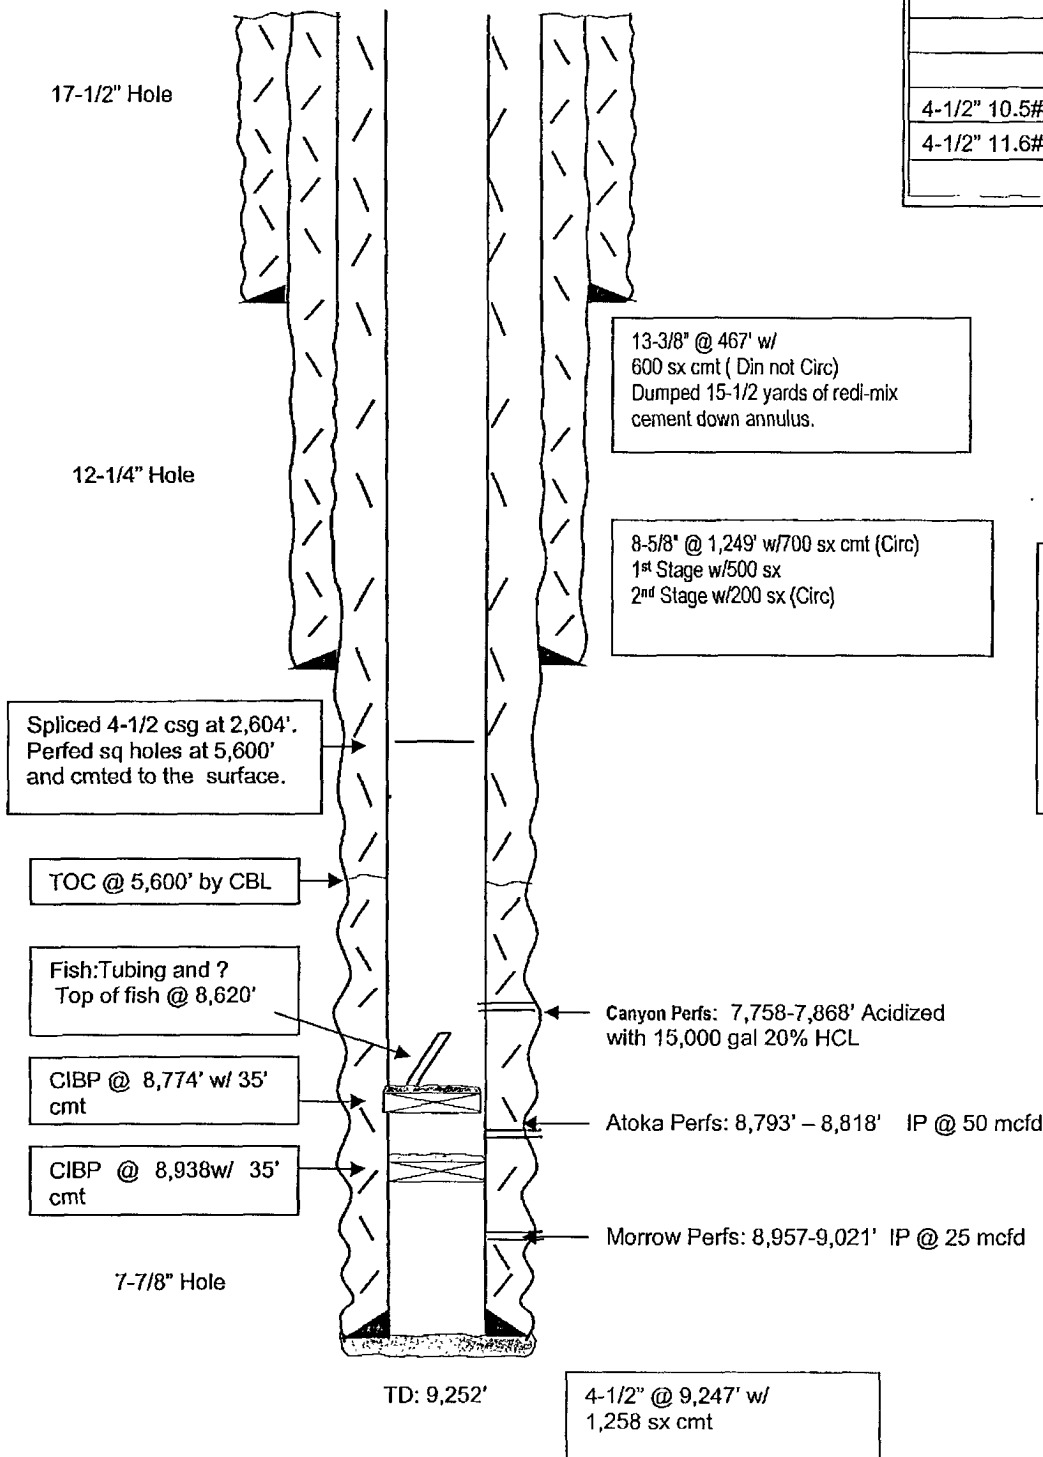


Not to Scale
5-6-10
Hill

WELL NAME: Bradshaw #1 FIELD: Penasco Draw Upper Penn
 LOCATION: 660' FSL & 660' FEL of Section 04-19S-25E Eddy Co., NM
 GL: 3,518' ZERO: KB:
 SPUD DATE: 01//1981 COMPLETION DATE:
 COMMENTS: API No.: 30-015-23564

CASING PROGRAM

| | |
|-------------------|--------|
| 13-3/8" 48# H-40 | 467' |
| 8-5/8" 24# K-55 | 1,249' |
| 4-1/2" 10.5# J-55 | 2,604' |
| 4-1/2" 11.6# N-80 | 6,643' |
| | 9,247' |

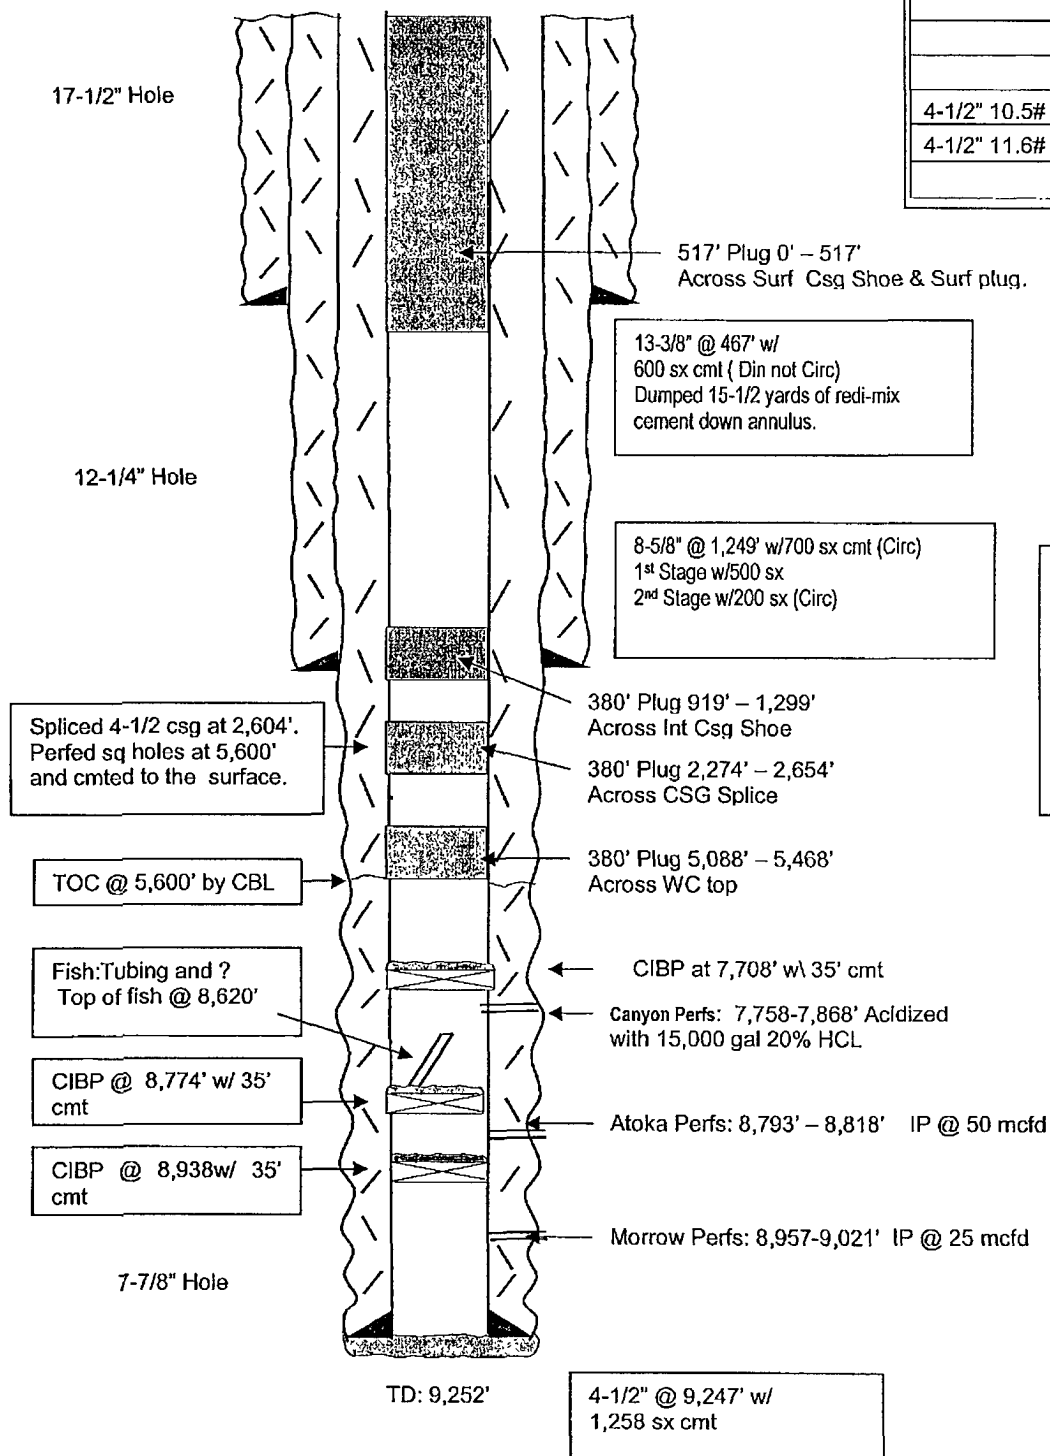

After

TOPS

| | |
|----------|--------|
| Glorieta | 2,044' |
| WC | 5,518 |
| Penn | 7,190' |
| Canyon | 7,612' |

Not to Scale
 5-6-10
 Hill