

District I
1/25 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-20931
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No. 302397
7. Lease Name or Unit Agreement Name Felmont-Atoka Com
8. Well Number 1
9. OGRID Number 228937
10. Pool name or Wildcat Atoka-Penn

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☐ Gas Well ☒ Other	
2. Name of Operator Matador Production Company	
3. Address of Operator 5400 LBJ Freeway, Ste. 1500, Dallas, Tx 75240	
4. Well Location Unit Letter 0 : 990 feet from the North line and 990 feet from the West line Section 12 Township 18S Range 26E NMPM County Eddy	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3291 GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐ DOWNHOLE COMMINGLE ☐	SUBSEQUENT REPORT OF: REMEDIAL WORK ☐ ALTERING CASING ☐ COMMENCE DRILLING OPNS. ☐ P AND A ☐ CASING/CEMENT JOB ☐
OTHER: ☐	OTHER: ☐

Notify OCD 24 hrs. prior to any work done

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Existing CIBP @ 8400' w/35' cement. RTH Tag

Circulate w/P&A mud.

Cut and pull 4 1/2" casing at 7300' or 500' above freepoint

Spot 30 sx plug 7250-7350'

Tag plug at 7250'

Spot 30 sx plug 5967'-5867'

Spot 30 sx plug 4376'-4276'

Spot 30 sx plug 2380'-2280'

Spot 30 sx plug 1913'-1813'

Tag plug at 1813'

Perf 8 5/8" casing @ 250'.

Squeeze 75 sx plug 250'-150'. Tag

Spot 10 sx surface plug. - Perf. @ 60' - cmt plug. 60' - 0'

Weld on cap and dry hole marker.


Remove all surface equipment

NMOCD, Artesia office, will be notified to witness all plugging operations.

Spud Date:

9-13-73

Rig Release Date:



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

David Lackey

TITLE

Consultant

DATE 9/28/10

Type or print name David Lackey E-mail address: L2cc@earthlink.net PHONE: 512-496-0941

For State Use Only

APH

Approval Granted providing work is complete by 1/5/2011


10/5/2010

Felmont - Atoka Com 1
990' FNL, 990' FWL, Sec 12, TS 18S, R 26E
Eddy County, NM

WELLBORE SCHEMATIC
Proposed Plugs

KB = 13' above GL
GL = 3291'
KB = 3304'

Spudded: 9/13/1973 Originally drilled: Felmont Oil Corp
Prepared by: DL 7/27/10
Updated by:

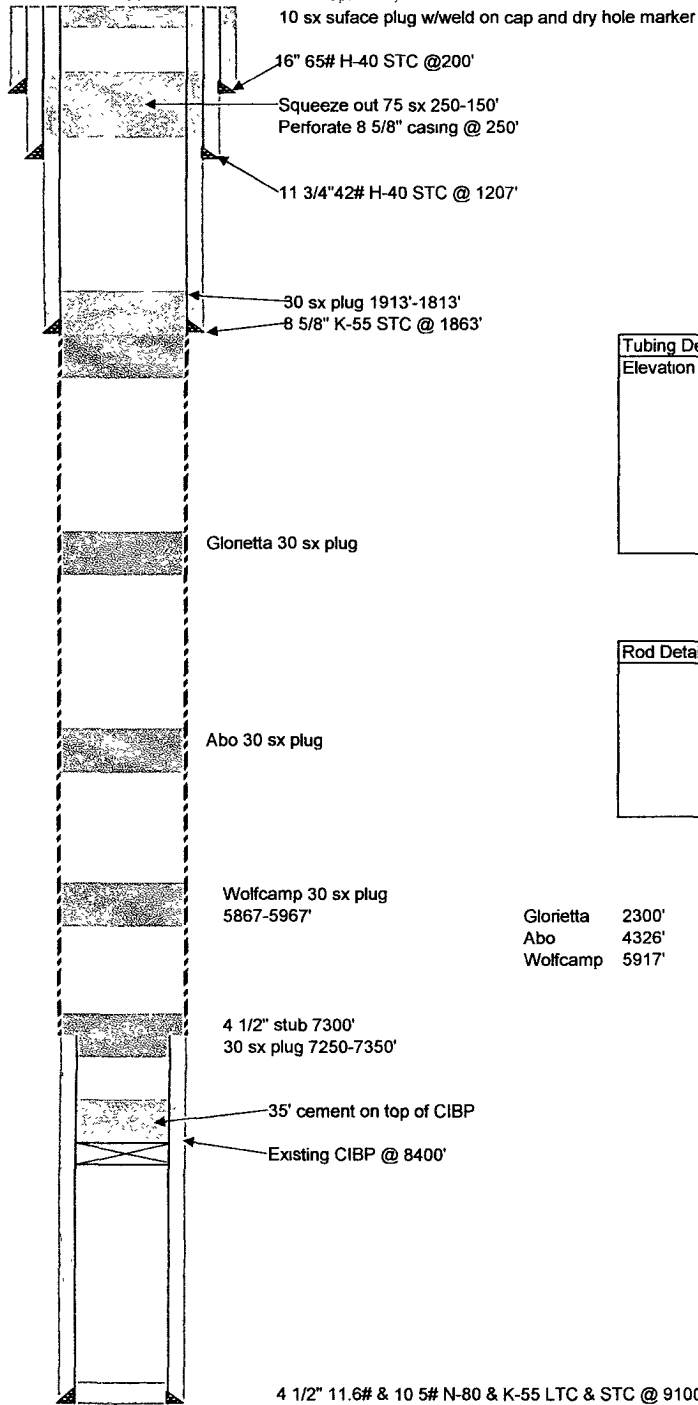

Tubing Detail	
Elevation - KB	
EOT at 0.00 KB	

Rod Detail	

Glorietta 2300'
Abo 4326'
Wolfcamp 5917'