

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIP
(Other Instructions
on Reverse Side)DATE
OR TOForm approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 10263

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Thomas LN Federal

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Und. San Andres

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Unit F-

Sec. 12-T6S-R25E

12. COUNTY OR PARISH 13. STATE

Chaves

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

SEP 18 1980

O. C. D.

ARTESIA, OFFICE

SEP 15 1980

U.S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Yates Petroleum Corporation

3. ADDRESS OF OPERATOR

207 S. 4th, Artesia, NM 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)

See also space 17 below.)

At surface

2310' FNL & FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DES or GR)

3803.1 GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 307' Spudded a 12-1/4" hole at 9:30 AM 6/4/80. Ran 8 joints of 8-5/8" 20# (306') of casing set at 296'. Cemented w/200 sacks Class C 4% CaCl. 1-Texas pattern guide shoe at 307'. Flapper float at 264'. PD 7:30 PM 6/4/80. Circulated 25 sacks to pit. WOC 12 hours. Nippled up and tested to 1000#, OK. Reduced hole to 7-7/8". Drilled plug and tested to 600#, OK. Resumed drilling.

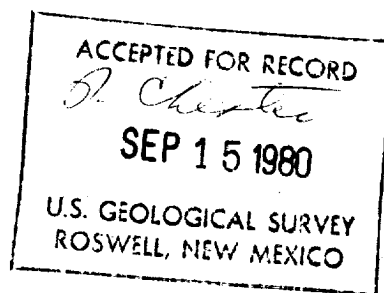

18. I hereby certify that the foregoing is true and correct

SIGNED

Albert R. Hall

TITLE

Engineer

DATE Sept. 11, 1980

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side