
_	~C157
Submit 3 Copies To Appropriate District State of New Me	exico Form C-103
Office District I Energy, Minerals and Natu	
1625 N Frenc., Dr., Hobbs, NM 88240	WELL API NO.
District II 811 South First, Artesia, NM 88210 OIL CONSERVATION	DIVISION 30005-60802  5. Indicate Type of Lease
District III 2040 South Pac	heco STATE FEE
1000 Rio Brazos Rd., Aztec, NM 87410 District IV Santa Fe, NM 8	7505 STATE FEE  6. State Oil & Gas Lease No.
2040 South Pacheco, Santa Fe, NM 87505	
SUNDRY NOTICES AND REPORTS ON WELLS	
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PL DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FO	OR GEFORE
PROPOSALS.)  Twin Lakes San Andres Unit	
1. Type of Well:	
Oil Well Gas Well Other Injection  2. Name of Operator	7. Well No.
Concho Oil & Gas Corp.	7. Well No. 42
3. Address of Operator	8. Pool name or Wildcat
110 W. Louisiana Ste 410; Midland, Tx 79701	Twin Lakes; San Andres (Assoc)
4. Well Location	
Unit Letter I: 1650 Feet from the South line and 990 feet from the East line	
Unit Letter I: 1650 Feet from the South line and 990 feet from the East line	
Section 31 Township 8S Range	e 29E NMPM Chaves County
10. Elevation (Show whether DR, RKB, RT, GR, etc.)	
3989 GR	
11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK D PLUG AND ABANDON	REMEDIAL WORK ALTERING CASING
TEMPORARILY ABANDON	COMMENCE DRILLING OPNS. PLUG AND
_	ABANDONMENT
PULL OR ALTER CASING	CASING TEST AND
OOM LETION	
OTHER:	OTHER:
12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date	
of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.	
of recompliation.	
Concho Oil & Gas Corp. respectfully request approval to plug and abandon the above well according to the	
following procedure:	
1. Notify NMOCD- Artesia.	
2. Set 200' cmt plug @ 2700-2900'. WOC & tag.	
3. Circ hole with mud.	
4.25 st. Set 75' plug @ 1500-2165'.	
5. Perf csg @ 1710' & set 100' plug @ 1660-1760'. inside outside 6. Perf csg @ 970' & set 100' plug @ 920=1020'. 870-970-inside outside 7. Perf csg @ 182'. Circ cmt to surface. 8. Cut off wellhead & install dry hole marker	
7. Perf csg @ 370 d set 100 plug @ 323 1920 : 370 1,5	
8. Cut off wellhead & install dry hole marker.	
o, out on wellhead a motali ary note marker.	
•	
I hereby certify that the information above is true and complete to the best of my knowledge and belief.	
CHANGE IN THE STATE OF THE STAT	
SIGNATURE TITLE <u>Production Analyst</u> DATE 1-9-02	
Type or print name Terri Stathen Terri Stathen Telephone 1915183,7443	
(This space for State use)	
APPPROVED BY  TITLE  DATE  DAT	
Conditions of approval, if any:  JAN 28 2002	

## **TLSAU #42**

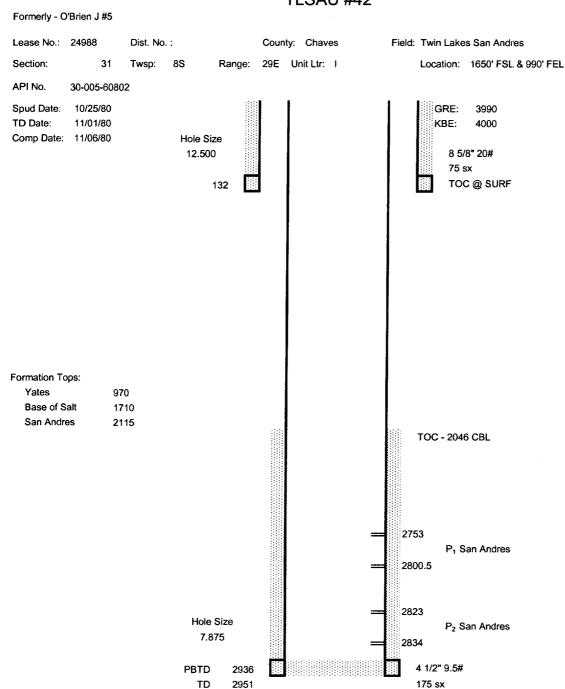

Original Perf Details: P1: 2758, 58.5, 59.5, 60, 75, 78, 78.5, 79, 80, 80.5, 85.5, 86, 86.5, 87

7000 gals 28% acid

Nov-84 Added P1: 2753-57, 2762-64, 2768.5-71, 2775.5-77, 2781-83.5

Xylene acid job

Feb-88

Add P1 & P2: 2791, 92, 95, 96, 97, 2800.5, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34

Acdz'd P2 w/ 1000 gals 20%