

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐  
2. NAME OF OPERATOR  
Yates Petroleum Corporation  
3. ADDRESS OF OPERATOR  
207 South 4th St., Artesia, NM 88210  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 990' FNL & 990' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input checked="" type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Production Casing <input type="checkbox"/>	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*


TD 720' - Ran 7" casing and got stuck at 340'. Obtained verbal approval to cement 7" to surface. Ran 9 joints of 7" 18# K-55 casing set at 340'. 1-regular pattern guide shoe at 340'. Flapper float insert at 304'. Cemented w/150 sacks Class C 2% CaCl. PD 12:00 noon 4-2-81. Bumped plug to 500 psi, released pressure & float held okay. Cement circulated 35 sacks. Compressive strength of cement - 850 psi in 12 hrs'. WOC 12 hours. Reduced hole to 6-1/4". TD 1100'. Ran 34 joints of 4-1/2" 9.5# J-55 LT&C of casing set at 1100'. 1-diff-fill shoe at 1100'. Cemented w/275 sacks 50-50 Lite Poz III, .3% D-65, .6% D-112 and 5# KCL/sack. PD 4:45 AM 4-5-81. Bumped plug to 500 psi, released pressure & float held okay. Cement circulated 15 sacks to pit.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Rogers A. Chapman TITLE Engineering Secretary DATE 4-7-81

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY.

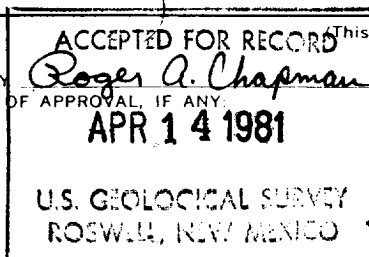

See Instructions on Reverse Side

5. LEASE  
NM 27909

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
RECEIVED

8. FARM OR LEASE NAME  
Comanche PQ Federal  
APR 15 1981

9. WELL NO.  
1  
O. C. D.

10. FIELD OR WILDCAT NAME  
Und. San Andres  
South Bitter Lake  
ARTESIA, OFFICE

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit A, Sec. 27-10S-25E

12. COUNTY OR PARISH  
Chaves

13. STATE  
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3536.1' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

