

Draw DD
Artesia, NM 88210

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-16069

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Coyote Draw Federal

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Wildcat Und. Abo

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Section 1-T8S-R24E

12. COUNTY OR PARISH 13. STATE

Chaves

NM

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

McClellan Oil Corporation

3. ADDRESS OF OPERATOR

Post Office Drawer 730, Roswell, New Mexico 88201

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

660' FSL & 660' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3698' G.L.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Casing and cement

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

X

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*


6/16/81: Move in Tex Mex Rig #2. Spud with 17½" bit.

6/17/81: Drilled to 450'. Could not get 13-3/8" casing to bottom.

6/18/81: Reamed hole from 200' to 450' with 17½" reamer.

6/19/81: Ran 448' of 13-3/8" 48 lb/ft new casing. Cemented with 100 sx Class "C" Thickset, 250 sx Halliburton Lite, 100 sx Class "C" with 4% CaCl₂. Did not circulate cement. Ran temperature survey. TOC at 280'.

6/20/81: One inched cement to surface with 200 sx Class "C" Thickset and 25 sx Class "C" Neat.

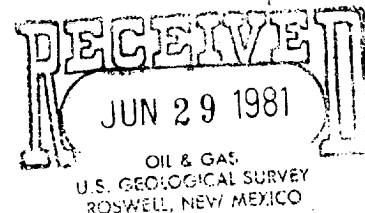

18. I hereby certify that the foregoing is true and correct

SIGNED

Paul Rapdale

TITLE Engineer

DATE 6/22/81

(This space for Federal or State Record)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

ROGER A. CHAPMAN

TITLE

DATE

JUN 29 1981

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side