

SF/jue

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Artesia, NM 88210

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Rault Petroleum Corporation

3. ADDRESS OF OPERATOR
808 W. Missouri, Midland, Texas 79701

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FS & 990' FEL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

5. LEASE
NM 20328

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
----- MAR 11 1982

8. FARM OR LEASE NAME
Tommy Federal

9. WELL NO. 1 ARTESIA, OFFICE

10. FIELD OR WILDCAT NAME
Wildcat Alto

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 24, T9S, R22E

12. COUNTY OR PARISH Chavez 13. STATE New Mexico


14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
4082 gr.

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- REQUEST FOR APPROVAL TO:
- TEST WATER SHUT-OFF
 - FRACTURE TREAT
 - SHOOT OR ACIDIZE
 - REPAIR WELL
 - PULL OR ALTER CASING
 - MULTIPLE COMPLETE
 - CHANGE ZONES
 - ABANDON*
 - (other)

- SUBSEQUENT REPORT OF:
- Surface casing
 -
 -
 -
 -
 -
 -
 -
 -
 -

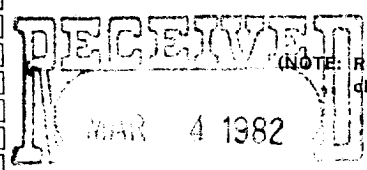

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

12 1/4" was spudded at 7:00 a.m. 2/23/82, drilled to 590' with air, converted to water, drilled with out returns to 1089', ran 8-5/8" guide shoe, 1 jt. 8-5/8", 24#, J-55 casing, 24 jts., 8-5/8", 24# casing, landed at 1089', cemented with 850 sxs of class "C", PD at 12:30 p.m. 2/28/82, cement did not circulate, cement was inserted from the surface thru 1" Kobe, top cement by survey was 550', 100sxs, 50sxs, 100sxs, 8 yds. of ready mix cement circulated, 3/1/82, witnessed by USGS, nipples up BOP, tested casing to 800 psi.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Joni Velazquez TITLE Manager DATE 3/2/82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

MAR 10 1982
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXIC

*See Instructions on Reverse Side