

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ gas ☒ other ☐  
well well  
2. NAME OF OPERATOR  
Yates Petroleum Corporation  
3. ADDRESS OF OPERATOR  
207 South 4th St., Artesia, NM 88210  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 660 FSL & 1980 FEL  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:  
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other)

SUBSEQUENT REPORT OF:

- ☒  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐



5. LEASE NM 17202  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME Short RM Federal  
9. WELL NO. 2  
10. FIELD OR WILDCAT NAME Pecos Slope Abo  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit 0, Sec. 27-T7S-R25E  
12. COUNTY OR PARISH Chaves 13. STATE NM  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3599.4' GR

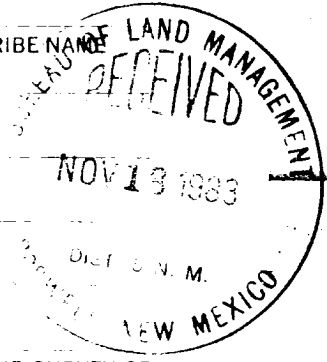

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded 14-3/4" hole 6:00 PM 11-11-83. Ran 22 jts 13-3/8" 68# J-55 casing set 800'. 1-Texas Pattern notched guide shoe set 800'. Insert float set 761'. Cemented w/200 sacks Pacesetter Lite, Tailed in w/300 sacks Class "C" 3% CaCl2. Compressive strength of cement - 1250 psi in 12 hrs. PD 3:30 PM 11-13-83. Bumped plug to 1000 psi, released pressure and float held okay. Cement did not circulate. WOC 6 hrs. Ran Temperature Sruvey and found top of cement 190'. Ran 1". Tagged cement 190'. Spotted 100 sacks Class "C" 3% CaCl2. PD 4:30 AM 11-14-83. WOC 2 hrs. Ran 1". Tagged cement 190'. Spotted 50 sacks Class "C" 3% CaCl2. PD 6:30 AM 11-14-83. WOC 2 hrs. Ran 1". Tagged cement 190'. Spotted 100 sacks Class "C" 3% CaCl2. Cement circulated 6 sacks to surface. WOC. Drilled out 9:30 AM 11-14-83. WOC 18 hrs. Nippled up and tested to 1000 for 30 minutes. okay. Reduced hole to 7-7/8". Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED David R. Glass TITLE Production Supervisor

DATE 11-16-83

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY (ORIG. SGD.) DAVID R. GLASS  
CONDITIONS OF APPROVAL NOV 28 1983

DATE

ROSWell, NEW MEXICO

\*See Instructions on Reverse Side