


UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

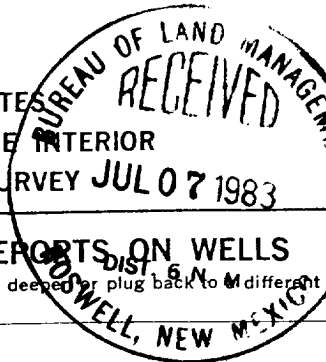

Oil Well Completion  
Drawn by \_\_\_\_\_ Form Approved.  
Artesia, NM Budget Bureau No. 42-R1424

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐

2. NAME OF OPERATOR  
Cibola Energy Corporation ✓

3. ADDRESS OF OPERATOR  
P. O. Box 1668, Albuquerque, NM 87103

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 990 FSL & 330 FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input type="checkbox"/>
(other) casing and cement job		

5. LEASE

NM-18611

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

RECEIVED

7. UNIT AGREEMENT NAME

JUL 15 1983

8. FARM OR LEASE NAME

Aciete Negra

9. WELL NO.

3

O. C. D.  
ARTESIA, OFFICE

10. FIELD OR WILDCAT NAME

Wildcat

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 13-9S-27E

12. COUNTY OR PARISH 13. STATE

Chaves

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3874.8

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

7/3/83. Ran 425' 8 5/8" 23# casing, texas pattern guide shoe and insert float. Cemented with 250 sacks Class "C" cement with 2% CaCl. Circulated 25 sacks to surface. Bump plug to 750#. Held pressure 30 minutes. WOC 18 hrs.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Karen Azar TITLE Drilling Secretary DATE 07/05/83

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

PSJP  
JUL 14 1983

\*See Instructions on Reverse Side

ROSWELL, NEW MEXICO