

4/5T

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas well ☐ other ☒ Dry

2. NAME OF OPERATOR

Enserch Exploration, Inc. ✓

3. ADDRESS OF OPERATOR

P.O. Box 4815, Midland, Texas 79704

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 560' FNL & 890' FWL

AT TOP PROD. INTERVAL: Same

AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☒

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON\* ☒

(other)

SUBSEQUENT REPORT OF:

RECEIVED BY

DEC 13 1983

O. C. D.

ARTESIA, OFFICE

5. LEASE  
NM - 18989

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Harper Federal

9. WELL NO.  
1

10. FIELD OR WILDCAT NAME  
Wildcat


11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Section 13, T6S, R29E

12. COUNTY OR PARISH  
Chaves

13. STATE  
New Mexico

14. API NO.  
30-005-62033

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
4200.9' GP.

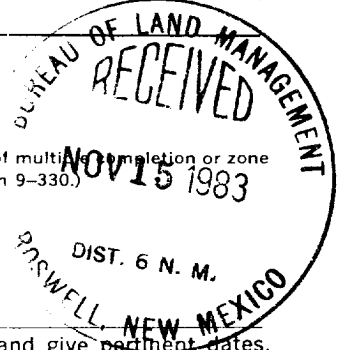

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Because of non-commercial oil and gas production plans are to plug and abandon this well as follows:

Set CIBP @ 7050'.

Dump 35' Class H cement on CIBP at 7050'.

Cut off 4-1/2" casing at 5000'.

Lay 60 sack Class H cement plug from 5050' to 4950'.

Lay 75 sack Class H cement plug from 2135' to 2035'. *Tag plug.*

Lay 15 sack Class H cement plug from 50' to surface.

Cut off 9-5/8" casinghead. Weld on 9-5/8" x 1/2" steel plate.

Install dry hole marker.

Clean location for final inspection.

*additional cmt. plug 498'-398'*

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Leonard Kersh TITLE Dist. Prod. Mgr. DATE \_\_\_\_\_

APPROVED

(This space for Federal or State office use)

APPROVED BY (Orig. Sgd.) PETER W. CHESTER TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

DEC 12 1983



\*See Instructions on Reverse Side