


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



45F
NM OIL CO. COMMISSION
Drawer DD Form Approved.
Budget Bureau No. 42-R1424

5. LEASE
NM-11596

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
PJ Federal Com

9. WELL NO.
2

10. FIELD OR WILDCAT NAME
South Pecos Slope

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 13-T9S-R25E

12. COUNTY OR PARISH | 13. STATE
Chaves | N.M.

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3702' G.L.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐


2. NAME OF OPERATOR
McClellan Oil Corporation

3. ADDRESS OF OPERATOR
P.O. Drawer 730, Roswell, N.M.

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FNL & 1650' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Spud & Casing	

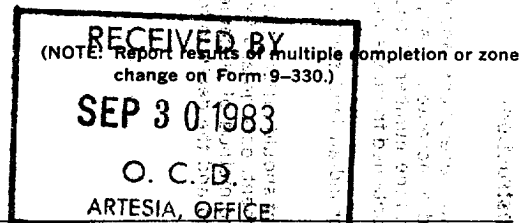

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9/24/83: Move in WEK Rig #3. Spud with 12 1/4" bit. Lost circulation at 25'. Reamed hole with 17 1/2" bit to 80'. Ran 80' of 13-3/8" conductor and cemented with 150 sx Class "C" with 2% CaCl₂ & 1b/sx flocele. WOC - 12 hours. Drill out with 12 1/4" bit.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Paul Bagdale TITLE Operations Manager DATE September 27, 1983

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

ACCEPTED FOR RECORD

SEP 29 1983

ROSWELL, NEW MEXICO