

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM Oil Cons. Commission
Drawer DD
Artesia, NM 88210

2/97
1. LEASE DENOMINATION AND SERIAL
NM-36189
2. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. ☐ OIL WELL ☐ GAS WELL ☒ OTHER


2. NAME OF OPERATOR
McKay Oil Corporation

3. ADDRESS OF OPERATOR
P.O. Box 2014, Roswell, New Mexico 88202

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
760' FSL & 990' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GK, etc.)
4367' GR

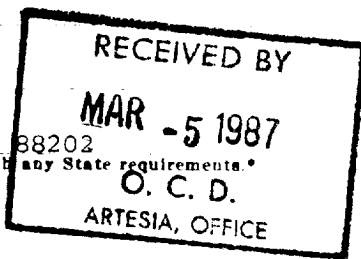

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
McKay Federal

9. WELL NO.
1

10. FIELD AND POOL OR WILDCAT
W. Pecos Slope-Abo

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 33, T5S, R21E

12. COUNTY OR PARISH
Chaves

13. STATE
N.M.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF	☐	WATER SHUT-OFF	☐
FRACTURE TREAT	☐	FRACTURE TREATMENT	☐
SHOOT OR ACIDIZE	☐	SHOOTING OR ACIDIZING	☐
REPAIR WELL	☐	REPAIRING WELL	☐
(Other)	☐	ALTERING CASING	☐
PULL OR ALTER CASING	☐	ABANDONMENT*	☒
MULTIPLE COMPLETE	☐		
ABANDON*	☐		
CHANGE PLANS	☐		

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent actions and give pertinent dates, including estimated date of starting and proposed work. If well is directionally drilled, give subsurface location, measured and true vertical depths for all markers and zones pertinent to this work.)

Operator plugged and abandoned well as follows: Total Depth 3400'

T/Abo 2730' - Set 100' cement plug from 2680-2780' w/30 sx Class 'C', 50-50 pozmix, 2% CaCl.


T/Tubb 2188' - Set 100' cement plug from 2138-2238' w/30 sx Class 'C', 50-50 pozmix, 2% CaCl.

8 5/8" Casing 912' - Set 100' cement plug from 862-962' w/30 sx Class 'C', 50-50 pozmix, 2% CaCl.

Surface - Set 50' cement plug from 0-50' w/15 sx Class 'C' cement, 2% CaCl.

Job complete 2/24/87.

Verbal permission received from Peter Chester-BLM 2/24/87.

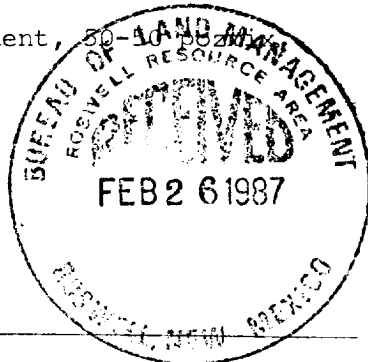

18. I hereby certify that the foregoing is true and correct

SIGNED Larry W. Markle TITLE Landman DATE 2/25/87

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____

CONDITIONS OF APPROVAL, IF ANY: Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

*See Instructions on Reverse Side

