

UNITED STATES N. M. OIL CONS. COMMISSION
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
P.O. BOX 1980
HOBBS, NEW MEXICO 88240

Expires August 31, 1985
5. LEASE DESIGNATION AND SERIAL NO. **c15F**
NM-0559993
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR


McClellan Oil Corporation

3. ADDRESS OF OPERATOR

P.O. Drawer 730, Roswell, N.M.

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

660' FSL & 1980' FEL

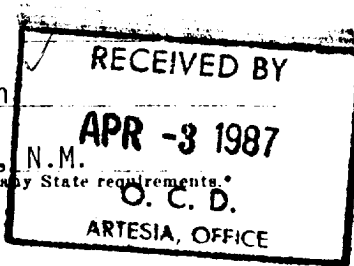

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

MM Federal

9. WELL NO.

4

10. FIELD AND POOL, OR WILDCAT

S. Pecos Slope Abo

11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA

Sec. 25-T9S-R25E

12. COUNTY OR PARISH 13. STATE

Chaves

N.M.

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, CR, etc.)

3630 GL.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETION

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other) Surface Pipe & Cement

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

3/21/87

Spud well with 12 1/4 bit.

3/15/87

TD surface at 960'. Ran 956' of 8 5/8 24# Casing cemented using Halliburton, with 250 sx H/Lite with additives and 250 sx Class "C" 2% CaCL. Circulated 110 sx. W.O.C. - 18 hours. Nippled up B.O.P. & Test (Holding) Drill out with 7 7/8" Bit.



18. I hereby certify that the foregoing is true and correct

SIGNED Mitch Lee

TITLE Drilling Engineer


DATE March 16, 1987

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

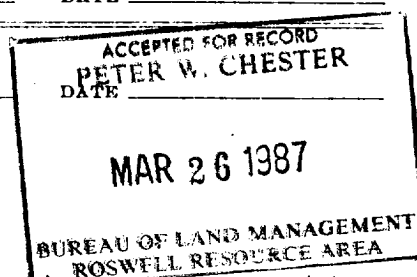

*See Instructions on Reverse Side