

Drawer DD

BUREAU OF LAND MANAGEMENT

Artesia, NM 88210

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		7. UNIT AGREEMENT NAME	
2. NAME OF OPERATOR Yates Petroleum Corporation		8. FARM OR LEASE NAME Wheeler AEE Federal	
3. ADDRESS OF OPERATOR 105 South 4th St., Artesia, NM 88210		9. WELL NO. 1	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 660' FSL & 660' FEL		10. FIELD AND POOL, OR WILDCAT Pecos Slope Abo	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Unit P, Sec. 25-T7S-R24E	
14. PERMIT NO. API 30-005-62478	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3770.9' GR	12. COUNTY OR PARISH Chaves	13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
(Other) <input type="checkbox"/>	

SUBSEQUENT REPORT OF:

WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREATMENT <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOTING OR ACIDIZING <input checked="" type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
(Other) Production Casing, Perforate <input checked="" type="checkbox"/>	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 4106'. Ran 101 jts 4-1/2" 9.5# J-55 casing set 4106'. 1-Regular guide shoe set 4106', Super seal float collar set 4065'. Cemented w/300 sx 65/35 Poz "C" with 2% gel, 4% Halad-4, 3% CFR-3, 5# Gilsonite and 5# salt (yield 1.41, weight 14.2). PD 3:45 AM 5-5-87. Bumped plug to 1000 psi for 30 minutes, released pressure, float and casing held okay. Ran 1" to 1600' and cemented w/300 sx Pacesetter Lite. WIH and perforated 3652-56' w/10 .42" holes (2 SPF). Acidized perforations at 3652-56' w/1000 gals 7 1/2% acid. Frac'd perms 3652-56' via 4-1/2" casing w/15000 gals gelled 2% KCL water and 25000# 20/40 sand.



18. I hereby certify that the foregoing is true and correct

SIGNED Lu Anita Goodlett

TITLE Production Supervisor


DATE 5-14-87

(This space for Federal or State office use)

APPROVED BY _____

TITLE _____

CONDITIONS OF APPROVAL, IF ANY:

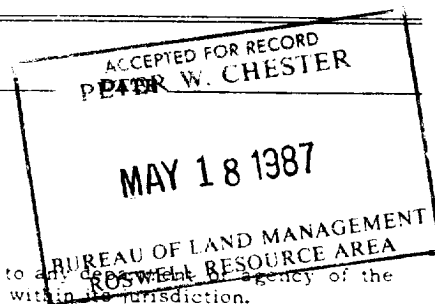

*See Instructions on Reverse Side