

U. S. ED STATES NM Oil Cons. Co. 3810N
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Artesia, NM 88210


Form approved,
Budget Bureau No. 1004-1
Expires August 31, 1985

CSF

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐
2. NAME OF OPERATOR
McClellan Oil Corporation
3. ADDRESS OF OPERATOR
P.O. Drawer 730, Roswell, NM 88202
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
1326' FNL & 2248' FWL
14. PERMIT NO.
15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3917' G.L.



5. LEASE DESIGNATION AND SERIAL NO.
NM-25862
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Toles Federal
9. WELL NO.
3
10. FIELD AND POOL, OR WILDCAT
Pecos Slope Abo
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 15-T8S-R23E
12. COUNTY OR PARISH
Chaves
13. STATE
NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
(Other) ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
ABANDON* ☐
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐
FRACTURE TREATMENT ☐
SHOOTING OR ACIDIZING ☐
(Other) casing & cement ☒
REPAIRING WELL ☐
ALTERING CASING ☐
ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

5/2/87: Spud 12 1/4" hole at 6:00 pm.

5/4/87: Ran 818' (19 joints) of 8-5/8", 23 lb., J-55 casing. Cemented with 150 sx Class "C" with 3% CaCl₂ & 150 sx Pacesetter Lite C with 4% CaCl₂. Did not circulate cement. Temperature survey indicated TOC - 520'. 1" with 140 sx Class C with 5% CaCl₂ and 3 yds. pea gravel. WOC. Test BOP's. Resume drilling with 7-7/8" bit.



18. I hereby certify that the foregoing is true and correct

SIGNED [Signature]

TITLE Drilling Engineer


DATE 5/5/87

(This space for Federal or State office use)

APPROVED BY _____

TITLE _____

CONDITIONS OF APPROVAL, IF ANY:

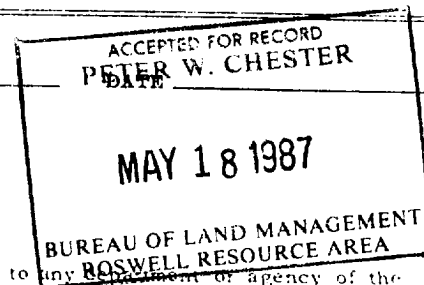

*See Instructions on Reverse Side