

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil & Gas Division
Drawer DD

Artesia, NM 88210

FILE NUMBER
NM 28171

SUNDRY NOTICES AND REPORTS ON WELLS

Use this form for proposals to drill or to deepen or plug back to a different depth.
Use APPLICATION FOR PERMIT for such proposals.

RECEIVED

1. NAME OF OPERATOR
Yates Petroleum Corporation ✓

2. ADDRESS OF OPERATOR
105 South 4th St., Artesia, NM 88210

3. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
990' FSL & 660' FEL

14. PERMIT NO.
API #30-005-62575

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3790' GR

FEB 02 '88

UNIT AGREEMENT NAME
FARM OR LEASE NAME
Spear OA Federal

WELL NO.
4

10. FIELD AND POOL OR WILDCAT
Pecos Slope Abo

11. SEC., T., S., M., OR BLK. AND SURVEY OR AREA
Unit P, Sec. 9-T9S-R26E

12. COUNTY OR PARISH 13. STATE
Chaves NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF
FRACTURE TREAT
SHOOT & ACIDIZE
REPAIR WELL
OTHER

PULL OR ALTER CASING
MULTIPLE COMPLETIONS
ABANDON
CHANGE LEASE

WATER SHUT-OFF
FRACTURE TREATMENT
SHOOTING OR ACIDIZING
Other: Production Casing, Perforate

REPAIRING WELL
ALTERING CASING
ABANDONMENT
X

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETE OPERATIONS. Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.

TD 5000'. Reached TD 12:45 PM 1-7-88. Ran 122 joints 4-1/2" casing set 5000'. Guide shoe set 5000', float collar set 4959'. Cemented w/500 gals mud flush + 500 gals Flocheck 21, 375 sx 65/35 Poz, 5#/sx Salt, .4% Halad-5, .3% CFP-3 and 1/4#/sx Flocele (yield 1.41, weight 14.0). PD 4:15 PM 1-8-88. Bumped plug to 1650 psi, released pressure, held okay. WOC 18 hrs. Ran 1500' 1". Cemented w/200 sx Pacesetter Lite. Perforated 4704-4718' w/11 .42" holes as follows: 4704, 05, 06, 07, 08, 11, 12, 13, 16, 17 and 18'. Acidized perforations 4704-18' w/1000 gals 7 1/2% NEFE acid + 20 ball sealers. Sand frac'd perfs 4704-18' with 40000 gals gelled KCL water and 70000# 20/40 sand.




18. I hereby certify that the foregoing is true and correct.

SIGNATURE *Archie Goodlett* TITLE Production Supervisor

DATE 1-20-88

This space is for Federal or State office use

APPROVED BY TITLE
CONDITIONS OF APPROVAL, IF ANY:

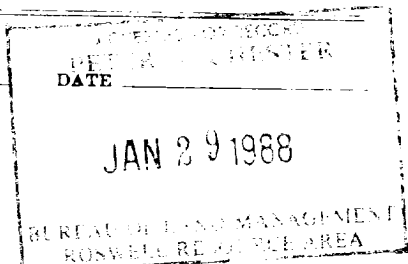

*See Instructions on Reverse Side