

(May 1963)

UNITED STATES M. O. S. G. COPY
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form approved. 7-6-67
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.
NM-068043

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Harris Fed.

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Buffalo Valley-Penn

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 24, T-15-S, R-27-E

N.M.P.M.

12. COUNTY OR PARISH 13. STATE

Chaves

New Mexico

1. OIL WELL ☐ GAS WELL ☒ OTHER

RECEIVE

2. NAME OF OPERATOR

Read & Stevens, Inc. ✓

MAR 21 1974

3. ADDRESS OF OPERATOR

P. O. Box 2126, Roswell, New Mexico 88201

O. C. C.

4. LOCATION OF WELL (Report location clearly and in accordance with any State or Federal law. See also space 17 below.)
At surface

ARTESIA OFFICE

2310' FWL & 990' FNL Sec. 24, T-15-S, R-27-E, N.M.P.M.

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3605' GR - 3617' RKB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Production casing

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

X

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 7 7/8" hole from 1726' to 8966' and ran 277 joints of 5 1/2" casing as follows:

	Footage	Depth
63 joints 5 1/2", 15 1/2#, K-55, Buttress Thd. csg.	2016.12	2016.12
108 joints 5 1/2", 15 1/2#, K-55, ST & C csg.	3469.37	5485.49
79 joints 5 1/2", 17#, K-55, ST & C csg.	2604.12	8089.61
27 joints 5 1/2", 17#, K-55 & N-80, LT & C csg.	881.12	8970.73

Total of 8970.73', set at 8966' RKB, cemented with 250 sx. Class "C" cement with 3/4 of 1% CFR-2 and 8# salt per sx. Centralizers on joints 1,3,5,7,9,11,13,15,17,19. Plug down @ 5:45 A.M., 2-1-74. WOC 18 hrs., pressure tested casing to 1500 PSI, held OK.

RECEIVED

MAR 20 1974

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

John L. Anderson

TITLE Agent

DATE 2-7-74


(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

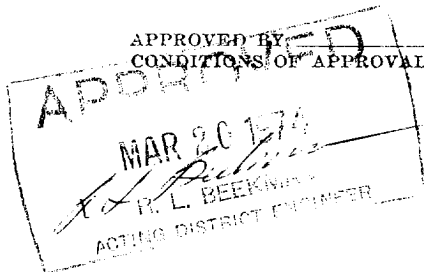

*See Instructions on Reverse Side