


FORM C-105

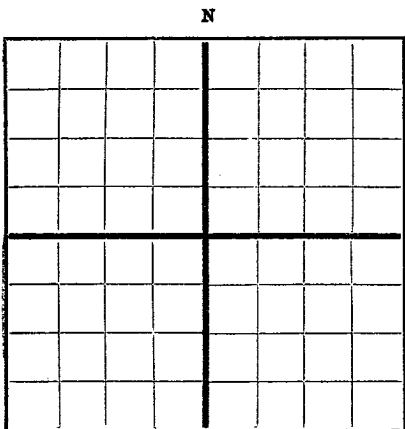

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

T. E. Boggs Roswell, N.M.  
Company or Operator Address  
Boggs Well No. 1 in ENW of Sec. 5, T. 16S  
Lease  
R. 25E, N. M. P. M., Wildcat Field, Eddy East West Section 5 County.  
Well is 3121 feet south of the North line and 2279 feet west of the East line of.  
If State land the oil and gas lease is No. Assignment No.  
If patented land the owner is T. E. Boggs, Address Roswell, N.M.  
If Government land the permittee is, Address.  
The Lessee is, Address.  
Drilling commenced May 25 19 48 Drilling was completed June 1, 19 48  
Name of drilling contractor Rupe & Rupe, Address Artesia, N.M.  
Elevation above sea level at top of casing feet.  
The information given is to be kept confidential until June 1 19 48

OIL SANDS OR ZONES

No. 1, from to No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.  
No. 1, from 212 to 365 feet.  
No. 2, from 487 to 709 feet.  
No. 3, from to feet.  
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material 25 sack cement, 2 sack Length 79 Depth Set 475  
Adapters — Material Aquajell Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to total Depth feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing no, 19  
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.  
Rock pressure, lbs. per sq. in.

EMPLOYEES

Steve Herring, Driller T. M. Timmons, Driller  
E. L. Bowman, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3rd  
day of December, 19 48  
Notary Public

My Commission expires Jan. 26, 1950.

Artesia, N.M. November 9, 1948  
Name J. E. Boggs  
Position Owner  
Representing T. E. Boggs  
Company or Operator  
Address Roswell, N.M.

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	6	6	Top Soil
6	20	14	Caliche
20	14	24	Gravel
14	212	168	Sandy Lime
212	365	153	Red Sand - Water
365	487	122	Lime
487	789	242	Lime ( Water Rock)
Total Depth 789 - PLUGGED & ABANDONED.			