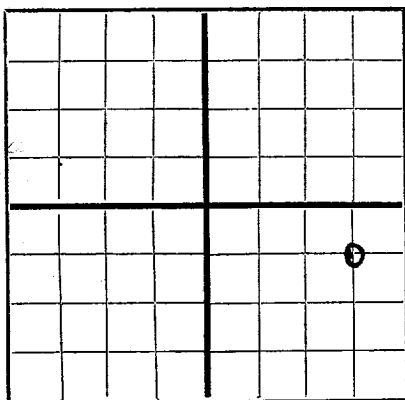


N

AREA 640 ACRES  
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

DEKALB AGRICULTURAL ASSN., INC. 806 Lubbock National Building, Lubbock, Texas.  
Company or Operator Address  
Tom Bogle Well No. 1 in NE/4, SE/4 of Sec. 15, T. 18S.  
Lease  
R. 26-E, N. M. P. M., Wildest Field, Eddy County.  
Well is 3300 feet south of the North line and 660 feet west of the East line of Section 15.  
If State land the oil and gas lease is No. Not Assignment No.  
If patented land the owner is Tom Bogle Address: Dexter, New Mexico.  
If Government land the permittee is Not Address:  
The Lessee is DEKALB AGRICULTURAL ASSN., INC. Address: Lubbock, Texas.  
Drilling commenced April 10 1948 Drilling was completed June 11 1948.  
Name of drilling contractor Peterson Drilling Company Address: Lubbock, Texas.  
Elevation above sea level at top of casing 3333 feet.  
The information given is to be kept confidential until Not 19.

## OIL SANDS OR ZONES

No. 1, from None found to No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 540 to 890 feet. No test-Regular  
No. 2, from 1600 to 2135 feet. Artesian water zone.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9 5/8"	36	8	National	991	Baker	Not	Not		Casing off Artesian water zone.

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	9 5/8"	991	500	Halliburton	9.5 gal.	No measure
				Top cement by temperature survey at 45 feet.		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters — Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	None					

Results of shooting or chemical treatment  
None

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 5506 feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing No Production 19  
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.  
Rock pressure, lbs. per sq. in.

## EMPLOYEES

S. D. Draughn Driller Jess Tennis Driller  
S. L. Cochran Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18

day of June 1948

Notary Public

My Commission expires June, 1949

Lubbock Texas June 18, 1948

Name E. C. McClure

Position Superintendent

Representing DEKALB AGRICULTURAL ASSN., INC.

Address 806 Lubbock National Building, Lubbock, Texas.

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	105	105	Sand
105	540	435	Sand and Anhydrite
540	890	350	Par. Dolomite
890	1600	710	Dolomite
1600	2135	535	Par. Dolomite
2135	2340	205	Dol. and Sand
2340	2565	225	Dolomite
2565	2715	150	Dolomite and Sand
2715	3010	295	Dolomite
3010	3135	125	Dolomite and Sand
3135	3510	375	Dolomite
3510	3780	270	Dolomite and Sand
3780	3860	80	Dolomite and Anhydrite
3860	3905	45	Dolomite
3905	4225	320	Dolomite and Anhydrite
4225	4515	290	Dolomite and Shale
4515	4585	70	Dolomite
4585	4920	335	Dolomite and Shale
4920	5365	445	Dolomite
5365	5385	20	Dolomite and Chert
5385	5410	25	Dolomite
5410	5506	96	Lime
	T. D.	5506.	