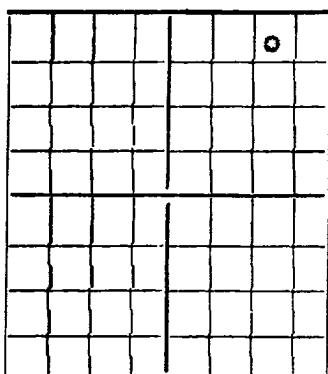


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Otis A. Roberts Artesia, New Mexico  
Company or Operator Address  
Carpenter-State Well No. 2 in NE 1/4 NE 1/4 of Sec. 25, T. 17S  
Lease  
R. 27E, N. M. P. M., Red Lakes Field, Eddy County.  
Well is 330 feet south of the North line and 390 feet west of the East line of Section 25  
If State land the oil and gas lease is No. B-2202 Assignment No. 23  
If patented land the owner is \_\_\_\_\_, Address \_\_\_\_\_  
If Government land the permittee is \_\_\_\_\_, Address \_\_\_\_\_  
The Lessee is Otis A. Roberts, Address Artesia, N. M.  
Drilling commenced February 28 1942 Drilling was completed March 7 1942  
Name of drilling contractor Otis A. Roberts, Address Artesia, N. M.  
Elevation above sea level at top of casing \_\_\_\_\_ feet.  
The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_.

## OIL SANDS OR ZONES

No. 1, from 460 to 463 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from 467 to 472 No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 110 to \_\_\_\_\_ feet.  
No. 2, from 210 to \_\_\_\_\_ feet.  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
5-1/2	17		Used	457'				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8-1/4"	5-1/2	457	12			

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
			700	3-12-42		

Results of shooting or chemical treatment Increased production from 2 bbl's per day to 62 bbl's.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from 0 feet to TD feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing March 13 1942  
58 bbl's oil and 4 bbl's wtr  
The production of the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

C. H. Beasley, Driller \_\_\_\_\_, Driller  
E. D. Ackerman, Driller \_\_\_\_\_, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

ARTESIA, N. M. March 17, 1942  
Place DateSubscribed and sworn to before me this 16th  
day of March, 1942Name Otis A. Roberts  
Position OwnerRepresenting Self  
Notary Public. \_\_\_\_\_

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40		Red Bed & Gyp
40	70		Red Bed & Gyp
70	160		Anhydrite
160	190		Red Bed
190	200		Red Bed & Anhydrite
200	215		Red Sand & Shale
215	235		Red Bed & Anhydrite
235	285		Red Beds
285	367		Red Beds & Anhydrite
367	370		Anhydrite
370	375		Red Beds
375	379		Anhydrite
379	383		Anhydrite
383	387		Broken Lime & Anhydrite
387	391		Anhydrite
391	398		Red Bed
398	401		Anhydrite
401	433		Anhydrite - Hard
433	438		Anhydrite
438	443		Shale
443	460		Anhydrite
460	463		Broken Lime - OIL SHOW
463	467		Anhydrite
467	472		Broken Lime- OIL SHOW
472	474		Broken Lime & Anhydrite
474	481		Anhydrite
481	487		Broken Lime - Brown
	TD.		