


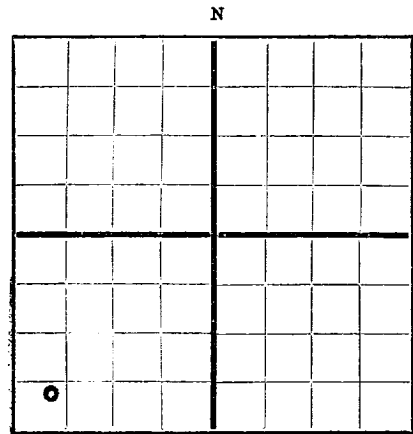

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

J. F. Bedingfield Box 563, Artesia, New Mexico
Company or Operator Address
State Well No. 1-B in NE 1/4 SW 1/4 of Sec. 36 T. 17
Lease 27 Empire Field, Pddy County.
Well is 954 feet south of the North line and 940 feet west of the East line of Sec. 36-T 17, R 27
If State land the oil and gas lease is No. E-397 Assignment No.
If patented land the owner is. Address.
If Government land the permittee is. Address.
The Lessee is. Address.
Drilling commenced. October 31 19 47 Drilling was completed. November 23 19 47
Name of drilling contractor J. F. Bedingfield, Owner Address. Artesia, New Mexico
Elevation above sea level at top of casing. feet.
The information given is to be kept confidential until. 19.

OIL SANDS OR ZONES

No. 1, from 400 to 420 No. 4, from. to.
No. 2, from 493 to 497 No. 5, from. to.
No. 3, from. to. No. 6, from. to.

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 290 to 420 feet. 3 bailers per hour.
No. 2, from 539 to 541 feet. 4 bailers per hour.
No. 3, from. to. feet.
No. 4, from. to. feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	20	8	Standard	452'	Regular		None		Water shut-off

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
8"	7"	452'	50	Circulated	None	50 sacks of cement

PLUGS AND ADAPTERS

Heaving plug—Material. Length. Depth Set.
Adapters — Material. Size.

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	Acid	Acid	1,000	11-26-47	493' to 530'	to 530'

Results of shooting or chemical treatment. Oil increased from 5 to 15 barrels per day.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 1 feet to 541 feet, and from. feet to. feet
Cable tools were used from. feet to. feet, and from. feet to. feet

PRODUCTION

Put to producing. November 27 19 47
The production of the first 24 hours was 25 barrels of fluid of which 90 % was oil; 10 % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours. None Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. F. Bedingfield
Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18th day of November 19 49
Notary Public 9/25/52
Artesia, New Mexico October 31, 1949
Name J. F. Bedingfield Owner
Position J. F. BEDINGFIELD
Representing Company or Operator
Address Box 563, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Red bed
20	30	10	Gyp
30	50	20	Anhydrite
50	105	55	Red bed
105	120	15	Anhydrite
120	130	10	Broken anhydrite
130	200	70	Anhydrite
200	290	90	Broken
290	300	10	Sand and water, 3 bailers per hour.
300	325	25	Anhydrite
325	350	25	Broken
350	375	25	Anhydrite
375	380	5	Water, sandy shale
380	400	20	Anhydrite
400	420	20	Broken, light show of gas.
420	450	30	Anhydrite
450	452	2	Reduced Hole 6"
452	473	21	Anhydrite
473	493	20	Anhydrite
493	497	4	Brown lime, oil show.
497	503	6	Anhydrite
503	505	2	Brown lime
505	509	4	Brown lime
509	511	2	Anhydrite
511	514	3	Brown lime
514	523	9	Anhydrite
523	533	10	Brown lime
533	539	6	Anhydrite
539	541	2	Brown lime & water
			Plugged back (See report)