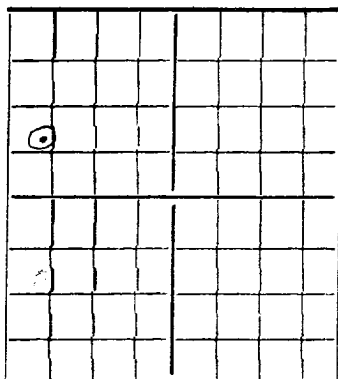


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

4. D. Cunningham 410 Grand, Box 163, Artesia, N. M.
Company or Operator Address
Jimmie Price Well No. 1 in NW 1/4 of Sec. 36, T. 17
Lease
R. 27, N. M. P. M., Red Lake Artesia Field, Eddy County.
Well is 1,650 feet south of the North line and 990 feet west of the East line of Sec. 36
If State land the oil and gas lease is No. B 2202 Assignment No.
If patented land the owner is, Address
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced May 27 1942 Drilling was completed June 10 1942
Name of drilling contractor Independent Drig. Co., Address Artesia, N. M.
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 452' to 463' No. 4, from 493' to 498'
No. 2, from 466' to 474' No. 5, from to
No. 3, from 478' to 485' No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 305' to 315' feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
7"	20lbs	10	L.P.	441'	Pattern			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8"	7"	441'	10	Pump		

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set
Adapters—Material None Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 498 feet, and from feet to feet

PRODUCTION

Put to producing June 10 1942
The production of the first 24 hours was 125 barrels of fluid of which 80 % was oil; %
emulsion; 20 % water; and % sediment. Gravity, Be 35
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Clay Cade, Driller
Jimmie Cunningham, Driller
Dexter Helper, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 16 day of June, 1942
Notary Public.
My Commission expires 11/19/1944
Name William E. Cunningham
Position Bookkeeper
Representing W. E. Cunningham Company or Operator
Address 410 Grand, Box 163, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	5'	5'	Soil
5'	10'	5'	Gravel and IMA soil
10'	75'	65'	Geliche
75'	160'	85'	Anhydrite
160'	245'	85'	Anhydrite
245'	300'	55'	Anhydrite
300'	310'	10'	Water Sand
310'	365'	55'	Anhydrite
365'	400'	35'	Anhydrite
400'	441'	41'	Anhydrite
441'	452'	11'	Anhydrite
452'	463'	11'	Oil Shale
463'	466'	3'	Anhydrite
466'	471'	5'	Brown Lime
471'	474'	3'	Brown Lime
474'	478'	4'	Anhydrite
478'	485'	7'	Brown Lime
485'	493'	8'	Gray Lime
493'	498'	5'	Brown Lime