


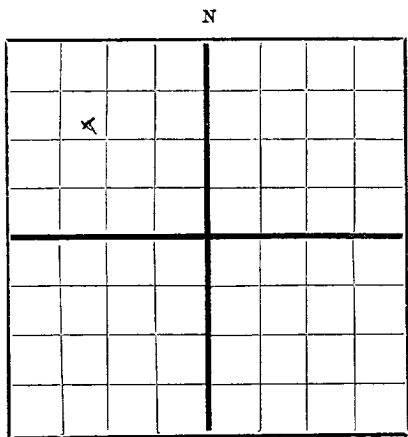

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Delhi Oil Corporation 1315 Pacific St., Dallas, Texas
Company or Operator Address
State Well No. 13 in 36 of Sec. 36, T. 17 South
Lease
R. 27 East, N. M. P. M. Red Lake Field, Eddy County.
Well is 990 feet south of the North line and 990 feet west of the East line of Section 36.
If State land the oil and gas lease is No. B-11538 Assignment No. 1.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Address
Drilling commenced May 15, 1948 Drilling was completed June 21, 1948
Name of drilling contractor Greiner Drilling Company Address Box 566, Artesia, New Mex.
Elevation above sea level at top of casing 3619 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 503 to 510 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 285 to 290 feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	24 lb	8	SH	1005'	Reg.	(pulled all but 32' 6")			
7"	20 lb	3		1510'		(pulled all but 292' 9")			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8"	1005'	50	Halliburton		
8"	7"	1510'	50	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from surface feet to total feet, and from feet to feet

PRODUCTION

Put to producing 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Earl Howell Driller W. C. Cox Driller
R. H. Terry Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th day of June, 1948
Notary Public
My Commission expires
Artesia, New Mexico June 24, 1948
Name
Position
Representing Delhi Oil Corp. 1315 Pacific St., Dallas, Texas
Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20		Shale
20	40		Gravwl
40	72		Red Rock
72	120		Red Rock & Gyp
120	147		Anhyd
147	240		Broken Anhyd
240	310		Red Rock - Water at 290'
310	470		Anhyd
470	485		Anhyd & Lime Shells
485	495		Lime
495	503		Lime & Anhyd
503	535		Lime Oil & Gas show from 503 to 510
535	635		Anhyd
635	660		Anhyd & Lime
660	668		Anhyd
668	715		Lime Gas from 668 to 677
715	779		Anhyd
779	805		Anhyd with red rock breaks
805	884		Red Sand
884	982		Anhyd
982	996		Red Sand
996	1255		Anhyd
1255	1389		Anhyd Broken
1389	1430		Anhyd
1430	1453		Lime
1453	1467		Anhyd & Red Shale
1467	1478		Lime
1478	1490		Anhyd
1490	1498		Lime
1498	1510		Lime
1510	1993		Lime