


Form 9-330

U. S. LAND OFFICE
SERIAL NUMBER MM-020268
LEASE OR PERMIT TO PROSPECT

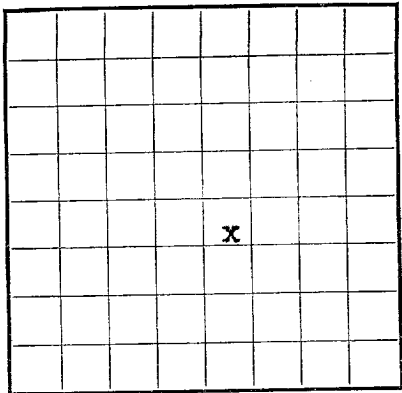

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

RECEIVED
APR 5 1960
D. C. C.
ARTESIA, OFFICE

LOG OF OIL OR GAS WELL

Company Kincaid & Watson Drilling Co Address Box 536, Artesia, New Mexico
Lessor or Tract Federal Field Red Lake State New Mexico
Well No. 1 Sec. 15 T. 17S R. 28E Meridian N.M.P.M. County Eddy
Location 2210 ft. S. of S. Line and 2310 ft. W. of E. Line of Sec. 15-17-28 Elevation 3555
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.
Signed [Signature]

Date April 4, 1960 Title Agent

The summary on this page is for the condition of the well at above date.

Commenced drilling 3-10, 1960 Finished drilling 3-27, 1960

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1485 to 1500 G No. 4, from _____ to _____
No. 2, from 1981 to 2021 Q No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 80 to 90 No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>12</u>	<u>40</u>	<u>8 rd.</u>	<u>Used</u>	<u>125'</u>	<u>Reg.</u>	<u>All</u>	<u>None</u>		<u>Conductor</u>
<u>10</u>	<u>24</u>	<u>8 rd.</u>	<u>Used</u>	<u>482</u>	<u>Reg.</u>	<u>None</u>	<u>None</u>		<u>Surface</u>
<u>8</u>	<u>14</u>	<u>8 rd.</u>	<u>New</u>	<u>1974</u>	<u>Float</u>	<u>None</u>	<u>None</u>		<u>Oil String</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8 5/8</u>	<u>482</u>	<u>50</u>	<u>Denton</u>		
<u>5 1/2</u>	<u>1974</u>	<u>100</u>	<u>Denton</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2025 feet, and from _____ feet to _____ feet

DATES

April 4, 1960, 19____ Put to producing April 1, 1960, 19____
The production for the first 24 hours was 100 barrels of fluid of which 100% was oil; _____%
emulsion; _____% water; and _____% sediment. Gravity, °Bé. 36
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

George Sands, Driller Nex Stephens, Driller
Jim Byler, Driller C.K. Parish, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u>	<u>80</u>	<u>80</u>	<u>Red rock</u>
<u>80</u>	<u>90</u>	<u>10</u>	<u>Sand & gravel</u>
<u>90</u>	<u>120</u>	<u>30</u>	<u>Red bed and gravel</u>
<u>120</u>	<u>210</u>	<u>90</u>	<u>Red rock</u>
<u>210</u>	<u>355</u>	<u>145</u>	<u>Red bed and anhydrite</u>
<u>355</u>	<u>475</u>	<u>120</u>	<u>Anhydrite</u>
<u>475</u>	<u>525</u>	<u>50</u>	<u>Anhydrite & red rock</u>
<u>525</u>	<u>610</u>	<u>85</u>	<u>Anhydrite & shale</u>
<u>610</u>	<u>1240</u>	<u>630</u>	<u>Anhydrite</u>
<u>1240</u>	<u>1275</u>	<u>35</u>	<u>Red sand</u>
<u>1275</u>	<u>1485</u>	<u>210</u>	<u>Anhydrite</u>
<u>1485</u>	<u>1500</u>	<u>15</u>	<u>Sand</u>
<u>1500</u>	<u>1555</u>	<u>55</u>	<u>Anhydrite</u>
<u>1555</u>	<u>1565</u>	<u>10</u>	<u>Red sand</u>
<u>1565</u>	<u>1725</u>	<u>160</u>	<u>Anhydrite</u>
<u>1725</u>	<u>1760</u>	<u>35</u>	<u>Lime</u>
<u>1760</u>	<u>1785</u>	<u>25</u>	<u>Anhydrite</u>
<u>1785</u>	<u>1981</u>	<u>196</u>	<u>Lime</u>
<u>1981</u>	<u>2021</u>	<u>40</u>	<u>Oil sand</u>
<u>2021</u>	<u>2025</u>	<u>4</u>	<u>White lime</u>
<u>2025</u>	<u>T.D.</u>		

[OVER]