


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

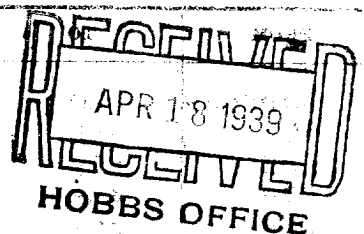

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

DUPLICATE

F.G.Keyes Red Gulch #-3

2029

Company or Operator

Lease

Well No. in NE 1/4 of Sec. 16, T. 17

R. 28 E, N. M. P. M., Red Lake Field, Eddy County.

Well is 330 feet south of the North line and 2310 feet west of the East line of 16

If State land the oil and gas lease is No. 2029 Assignment No. 13

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is F.G.Keyes Address Roswell, N.M.

Drilling commenced Dec. 12 1938 19 Drilling was completed March 24 1939

Name of drilling contractor F.G.Keyes Address

Elevation above sea level at top of casing 3550 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 255 salt water to 275 feet. 100'

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 1/2				494				
7				1231				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
7 1/2	7	1231	50	Halliburton		40 sax

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from top feet to bottom feet, and from feet to feet

PRODUCTION

Put to producing 19 dry and abandoned

The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Frank Pigner, Driller Conrad Keyes, Driller
Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Roswell

April 17 1939

day of 19

Name F. G. Keyes

Position Owner

Notary Public.

Representing

Company or Operator

My Commission expires

Address Roswell, N.M. Box 936.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
surface	30	30	soil
30	255	225	red beds & shl
255	275	20	anhy
275	465	190	anhy & red beds
465	493	28	lime & anhy
493	508	15	lime
508	565	57	anhy & red shl
565	606	41	lime & anhy
606	655	49	anhy & gyp
655	775	120	lime & anhy
775	797	42	anhy & red shl
797	878	81	lime & blues shl
878	911	33	lime & anhy
911	1077	166	lime & brown shl
1077	1126	59	lime & anhy & brown shl
1126	1136	40	anhy & brown shl
1136	1182	16	red sand
1182	1314	132	lime grey
1314	1338	24	lime brown
1338	1358	20	lime
1358	1394	36	lime & anhy
1394	1436	42	lime sandy
1436	1460	24	lime grey sandy
1460	1487	27	lime white
1487	1600	113	lime brown
1600	1631	31	lime grey & brown
1631	1641	10	lime black
1641	1825	184	lime grey
1825	1868	43	lime grey & brown shl
1868	1919	51	lime grey
1919	1933	14	lime grey & red shl
1933	1980	47	lime grey
1980	2005	25	lime white
2005 TD			