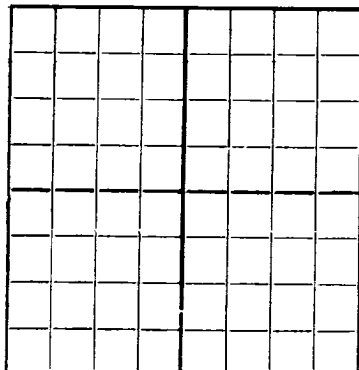


FORM C-105

N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Bedingfield & Featherstone Brooks
Company or Operator Lease
Well No. 19 in of Sec. 19, T. 17S
R. 28E, N. M. P. M., Empire Field, Eddy County.
Well is 330 feet south of the North line and 1650 feet east west of the East line of 19-17-28
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is LC 050319-A Address
The Lessee is Lucia Brooks Address
Drilling commenced 1-1-51 19 51 Drilling was completed 3-5-51 19 51
Name of drilling contractor Address
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 577 to 581 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 250 to 260 feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
8-5/8	28 lbs	8	SH	380	reg	pulled			water string
7"	17 "	8	SH	558	reg.				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
7 1/4	7"	558	50	Denton		2 sacks acquerel
				Squeezed with 100	sacks of cement	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		431	100 qts	3-1-51	574-600	604

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from Top feet to 604 feet, and from feet to feet.

PRODUCTION

Put to producing 3-6, 19 51
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. L. Bedingfield Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Place

Date

day of, 19

Name Ann Clanton

Position Sec.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15		Soil & Caliche
15	45		Gyp-Red bed
45	85		Shells & Redbed
85	148		Red & Brown Shells
148	160		Anhy.
160	165		Blue Shells
165	212		Broken Anhy
212	290		Anhy. shells
290	345		Red bed; red rock
345	379		Red shells
379	383		Anhy
383	517		Anhy. Shale breaks
517	558		Red bed & anhy
558	571		Broken anhy. Bentonite
571	577		Anhy
577	594		Broken brown lime
594	604		Brown lime & anhy