

1473  
30-015-01444


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

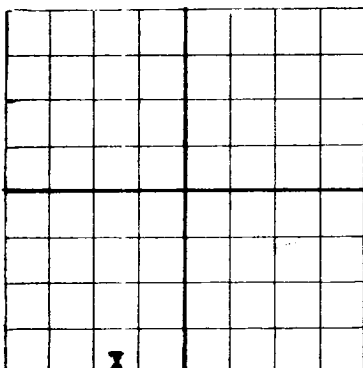

AREA 640 ACRES  
LOCATE WELL CORRECTLY

**FRANK AREGOOD** **Artesia, New Mexico**  
Company or Operator Address  
**Forest Laverne** **Trustee,** State Well No. **1** in **SE-3/4** of Sec. **19**, T. **19N**  
R. **28E**, N. M. P. M., **Red Lake** Field, **Eddy** County.  
Well is **330** feet **North** of the **South** line and **1650** feet **East** of the **West** line of **Section 19**  
If State land the oil and gas lease is No. **703** Assignment No. **56**  
If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_  
If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_  
The Lessee is \_\_\_\_\_ Address \_\_\_\_\_  
Drilling commenced **2/11** 19 **43** Drilling was completed **2/28** 19 **43**  
Name of drilling contractor **Frank Aregood** Address **Artesia, New Mexico**  
Elevation above sea level at top of casing \_\_\_\_\_ feet.  
The information given is to be kept confidential until **No** 19 \_\_\_\_\_

## OIL SANDS OR ZONES

No. 1, from **480** to **482** No. 4, from **508** to **511**  
No. 2, from **482** to **490** No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from **490** to **502** No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **200** to **205** feet. **hole full of water**  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<b>7" OD</b>	<b>20</b>	<b>10</b>		<b>385</b>					

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<b>8 1/2"</b>	<b>8" OD</b>	<b>385</b>	<b>10 sacks</b>	<b>by hand</b>		

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment \_\_\_\_\_

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from **0** feet to **528** feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing **Dry Hole**, 19 \_\_\_\_\_  
The production of the first 24 hours was **P.S.A.** barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

Driller **E. D. ACKERMAN** Driller  
Driller \_\_\_\_\_ Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **1st**

day of **March**, 19 **43**

**Artesia, New Mexico** **3/1/43**

Place **Frank Aregood** Date

Name **FRANK AREGOOD**

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Red bed & gyp
40	90	50	Gyp & red bed
90	105	15	Anby
105	200	95	Anby
200	205	5	Anby - hole full of water
205	225	20	Red bed
225	245	20	Anby
245	280	35	Red bed and Anby
280	400	120	Anby
400	406	6	Red bed
406	480	74	Anby
480	482	2	Brown lime - slow oil
482	490	8	Brown Lime and Anby
490	497	7	Anby
497	498	1	Brown lime
498	502	4	Brown lime
502	508	6	Anby
508	511	3	Light brown lime & anby
511	524	13	Anby
524	528 T.D.	4	Lime & Anby

-TD-