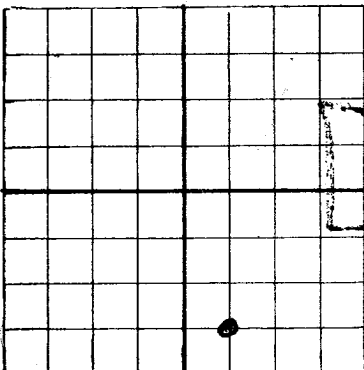



N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

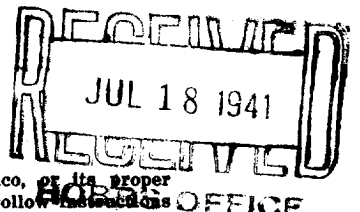

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

HERBERT AID

1810 ELECTRIC BLDG FORTWORTH, TEXAS

Company or Operator

Address

WENTZ-STATE

Well No. 1

in SWSE

of Sec. 24

T. 17S

Lease

R. 28E N. M. P. M., WILDCAT Field, EDDY County.

Well is 4950 feet south of the North line and 2310 feet west of the East line of SECTION 24

If State land the oil and gas lease is No. B-6251 Assignment No. 3

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is L. H. WENTZ Address PONCA CITY, OKLA

Drilling commenced APRIL 10, 1941 Drilling was completed JULY 7 1941

Name of drilling contractor FLYNN, WELCH &amp; YATES Address ARTESIA, NEW MEXICO

Elevation above sea level at top of casing 3677 feet.

The information given is to be kept confidential until NOT CONFIDENTIAL 19

## OIL SANDS OR ZONES

No. 1, from 2060 to 2065 No. 4, from 990 to 993

No. 2, from 2200 to 2204 No. 5, from to

No. 3, from 945 to 954 No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 270 to 275 feet. HOLE FULL

No. 2, from 285 to 300 feet. " "

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8"	24#	10"		486-3	REGULAR				SURFACE OIL STRING
7"	20#	10		810	"				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8"	486-3	50	HALLIBURTON		
8 1/2"	6"	810'	50	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	5"	GLYCERIN	80 QTS	5-16-41	2195-2215	2215
	5"	"	100"	5-17-41	2050-2070	"
	5"	"	30 "	5-25-41	889-895	915

Results of shooting or chemical treatment No results from shots 2195-2215 or 2050-70 pumped 21 barrels oil first day from shots in camp 845-54 and 890-93

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 2840 feet, and from feet to feet

## PRODUCTION

Put to producing July 7 1941

The production of the first 24 hours was 21 barrels of fluid of which 100% was oil;

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Frank Starkey Driller A. W. Whitman Driller

Ted Evans Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14<sup>th</sup>

Place Date July 14, 1941

day of July 1941

Name Herbert Aid

Position

L. H. O'Dell W. O'DELL

Notary Public

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	270	270	RED ROCK AND GYP
	275	5	WATER SAND
	285	100	RED ROCK AND GYP
	300	15	SAND AND GRAVEL WATER
	435	135	RED ROCK
	530	95	SALT
	715	185	ANHYDRITE
	760	45	" AND RED ROCK
	845	85	ANHYDRITE
	854	9	SAND SHOW OIL
	890	36	ANHYDRITE
	893	3	SAND SHOW OIL
	1120	227	ANHYDRITE
	1135	15	LIME
	1507	372	ANHYDRITE
	1512	5	RED SAND
	1522	10	ANHYDRITE
	1545	23	RED SAND
	1755	210	ANHYDRITE
	1764	11	SAND
	1805	41	ANHYDRITE
	1815	10	RED SAND
	1895	80	ANHYDRITE
	1905	10	BROWN LIME
	1925	20	ANHYDRITE
	2058	33	LIME SLIGHT SHOW OIL 2015-18
	2065	10	SAND SHOW OIL
	2200	35	LIME
	2204	4	SAND SHOW OIL
	2840	636	LIME SLIGHT SHOW OIL 2451-60